





Clock circuit, use jumper to choose between slower 555 or 4MHz




Power jack, 5v center positive




Mounting holes




Drivers for address lines and data lines LEDs. Optional, but the blinkenlights are fun :)

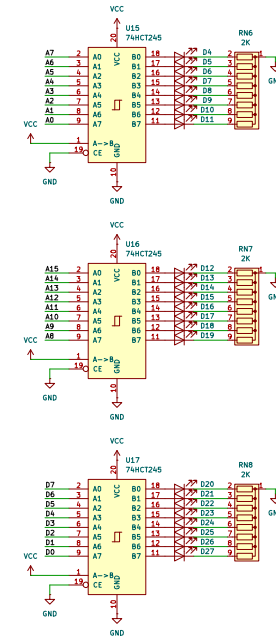


Z80 CPU and pull up resistors. CMOS required to use 555 timer, otherwise NMOS should work fine.




ROM and RAM. A 27C64 or larger would also work. If using a larger ROM, duplicate the program across all banks. It would also be possible to use a larger RAM such as a 62256. If you actually want to use the additional RAM, I believe a few traces to the 74HC138 would need to be cut and jumper wires installed.

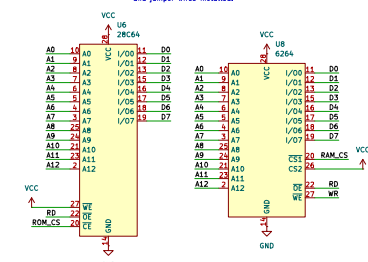


Expansion header, same pinout as Z80




ROM and RAM address decoding logic



ID Decoding Logic



7 segment driver: isolated nodular networks, and 7 segment displays (common cathode, negative).

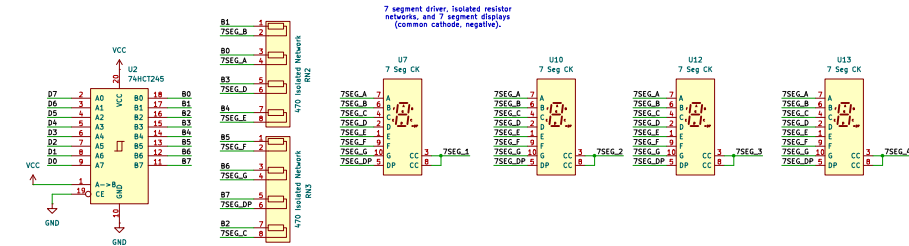

Buttons and input switches. Pulldown resistors are used as 74HC don't like floating inputs.

