



- Z21
Shorting plug J14 shall be raised to minimum height of 250mils above PCB
- Z22
These assemblies are ESD sensitive, ESD precautions shall be observed.
- Z23
These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.
- Z24
These assemblies must comply with workmanship standards IPC-A-610 Class 2, unless otherwise specified.

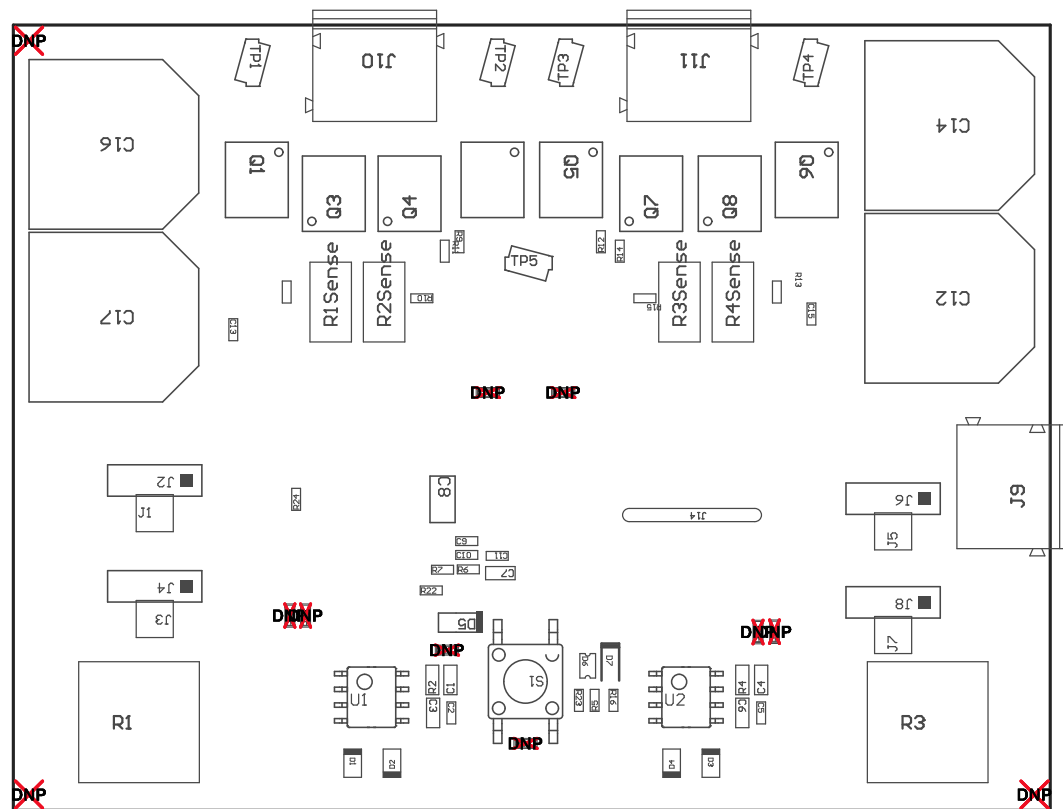

COMPONENTS MARKED 'DNP' SHOULD NOT BE POPULATED.
ASSEMBLY VARIANT: 001

PCB VIEWED FROM TOP SIDE	BOARD #: MDBU010	REV: A	SUN REV: Not In VersionControl
	TID #: N/A		
PLOT NAME = Top Assembly Drawing	GENERATED : 10/19/2015 10:20:54 AM	TEXAS INSTRUMENTS	

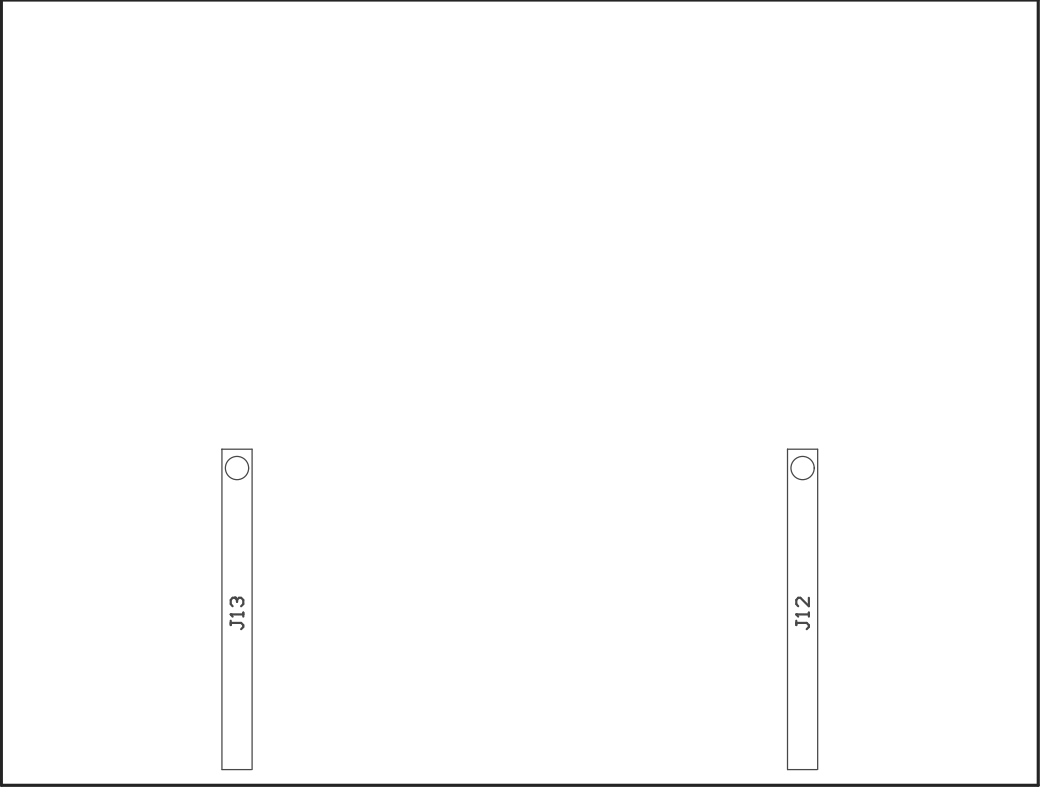

COMPONENTS MARKED 'DNP' SHOULD NOT BE POPULATED.
ASSEMBLY VARIANT: 001

PCB VIEWED FROM BOTTOM SIDE	BOARD #: MDBU010	REV: A	SUN REV: Not In VersionControl
	TID #: N/A		
PLOT NAME = Bottom Assembly Drawing	GENERATED : 10/19/2015 10:20:56 AM		TEXAS INSTRUMENTS