




RFID InlayTyfung Impinj Monza M750

Dimensions (WxH)
96 mm X26 mm (3.744 " X 1.014 ")

DESCRIPTION

THE STRONGEST INLAY WITH OUTSTANDING PERFORMANCE Developed to offer the logistics industry a strong RFID label design with outstanding performance, the Tyfung inlay combines a high read range and low sensitivity, making it ideal for use in the industrial sector and through the supply chain, as well as traditional retail applications such as inventory control and RFID as EAS.

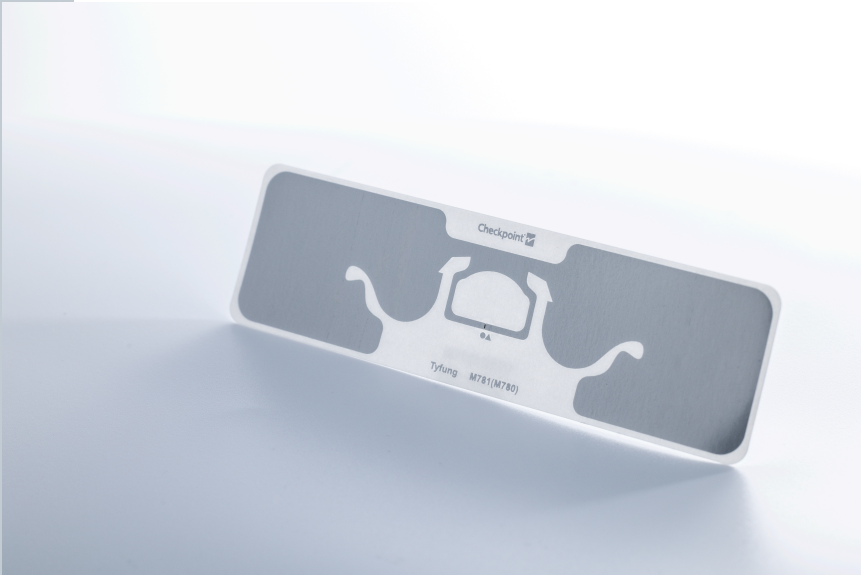

RFID SPECIFICATIONS

Protocol	ISO/IEC 18000-63:2015 and EPCglobal Gen2v2 compliant
Operating Frequency	860 Mhz - 960 Mhz
Chip Type	Monza M750
Unique TID / UID	96 bits
EPC Memory	96 bits
User Memory	32 bits
Tag type	UHF RFID

INDUSTRIES

Logistics	Retail Apparel
Retail Food	

APPLICATIONS



Anti theft

Asset tracking - heavy loading

DC inbound box level



DC Outbound



Inventory visibility




Omnichannel



Store processes (Cycle Count / item locator / POS)

ARC CATEGORIES

OTHER CERTIFICATIONS

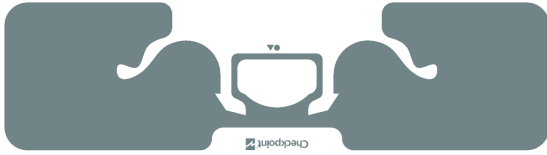


PERFORMANCE

ETSI Read Range	20.80 m
FCC Read Range	19.40 m


READ RANGE

Free Space, Light, & Heavy Loading Conditions

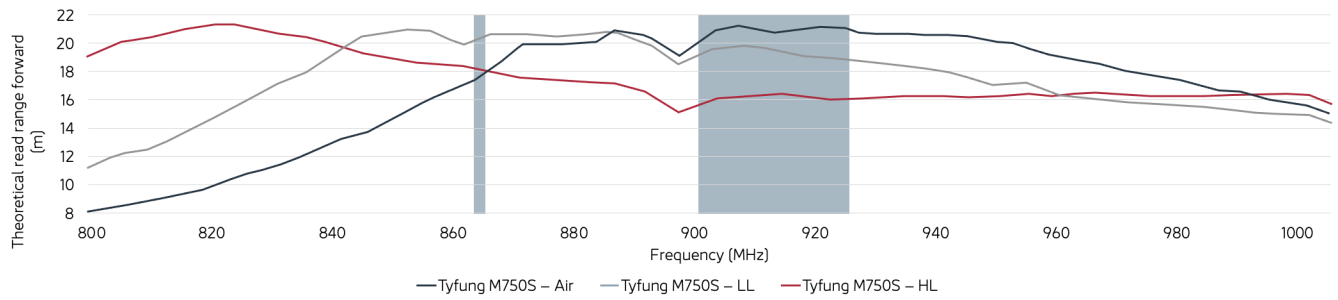

ORIENTATION SENSITIVITY

ETSI -22.40 MHz

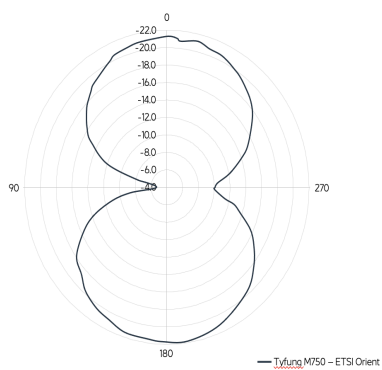

FCC -22.30 MHz

