

PPCA2016 大作业：带 5 级流水的 MIPS 模拟器

柯嵩宇

2016 年 7 月 4 日

目录

| | |
|---------------------------|-----------|
| 1 基本要求 | 3 |
| 1.1 时间 | 3 |
| 1.2 实现语言 | 3 |
| 1.3 代码管理与提交 | 3 |
| 1.3.1 Git | 3 |
| 1.3.2 Bitbucket | 3 |
| 1.4 代码文件要求 | 3 |
| 1.4.1 Makefile | 3 |
| 1.5 setvars.sh | 3 |
| 1.6 程序执行要求 | 3 |
| 2 实现要求 | 4 |
| 2.1 要求实现的汇编语言特性 | 4 |
| 2.1.1 汇编器指令 | 4 |
| 2.1.2 SPIM 指令集 | 4 |
| 2.2 统计要求 | 10 |
| 2.3 细节要求 | 10 |
| 2.3.1 5 级流水划分 | 10 |
| 2.3.2 寄存器读写顺序 | 11 |
| 2.3.3 对于 Hazard 的处理 | 11 |
| 3 MIPS 汇编语言快速介绍 | 11 |
| 3.1 汇编语法 | 11 |
| 3.2 汇编语言执行细节 | 12 |
| 3.3 内存细节 | 12 |
| 3.4 寄存器的初始化 | 13 |
| 3.5 多字节 load/store 指令实现细节 | 13 |
| 3.6 其余细节 | 13 |

| | | |
|----------|-------------------|-----------|
| 4 | 更新日志 | 13 |
| 4.1 | 7 月 3 日 | 13 |
| 4.2 | 7 月 4 日 | 14 |

1 基本要求

1.1 时间

见课程主页

1.2 实现语言

C++、Java 等，不推荐使用 Python，如果使用了其他的语言请提前告知助教以便助教配置评测环境

1.3 代码管理与提交

1.3.1 Git

要求全程使用 git 作为版本管理工具，学习并正确使用 git¹。

1.3.2 Bitbucket

要求把代码推送到 bitbucket²上，在 bitbucket 上面的项目名字为 `mips-simulator`³，并且给用户 BreakVoid 一个 Read 权限⁴。

1.4 代码文件要求

1.4.1 Makefile

测试的时候会使用 `make` 命令编译程序，因此需要准备 Makefile 来保证助教可以正常编译代码。

1.5 setvars.sh

由于助教并没有对你们的程序的可执行文件名做出要求，同时对于编程语言的选择也没有做出强制要求，为了保证助教可以正常运行程序，需要提供一个 `shell` 文件，来设置环境变量。在这个文件里面应该包含一个导出环境变量 `MSCK` 的指令，之后助教会提供一个样例的 `shell` 文件

1.6 程序执行要求

程序要求接受一个传入参数，参数为汇编文件名，然后从 `stdin` 读入数据，输出执行过程中必要的输出到 `stdout`，例

¹正确使用：助教可以通过你们的历史版本和提交记录了解你们的工作情况。如果只有一次或者非常少量的提交记录，那么将被判定为不正确的使用 Git，会在一定程度上影响成绩

²一个与 Github 类似的远程代码仓库，区别在于 Github 在免费使用时创建私有仓库的权限，而 bitbucket 的每个账户可以有 5 个免费的私有仓库

³项目名字很重要，这个关系到评测，直接影响到助教能否正确的通过批量测试脚本获取你们的代码

⁴禁止把仓库的权限设置成公开的 (public)

2 实现要求

要求实现的是一个能够正确解释 MIPS 汇编语言中与整数运算有关的一个子集的模拟器。关于程序的正确性方面，要求实现的模拟器有和 SPIM 相同的行为。

2.1 要求实现的汇编语言特性

一下提及的指令都以 SPIM Quick Reference 和 SPIM 的实际执行效果为准⁵。

2.1.1 汇编器指令

需要实现的 MIPS 汇编器指令如下：

.align n Align the next datum on a 2^n byte boundary. For example, `.align 2` aligns the next value on a word boundary. `.align 0` turns off automatic alignment of `.half`, `.word`, `.float`, and `.double` directives until the next `.data` or `.kdata` directive.

.ascii str Store the string in memory, but do not null-terminate it.

.asciiz str Store the string in memory and null-terminate it.

.byte b1, ..., bn Store the n values in successive bytes of memory.

.data The following data items should be stored in the data segment. If the optional argument `addr` is present, the items are stored beginning at address `addr`.

.half h1, ..., hn Store the n 16-bit quantities in successive memory halfwords.

.space n Allocate n bytes of space in the current segment (which must be the data segment in SPIM).

.text The next items are put in the user text segment. In SPIM, these items may only be instructions or words (see the `.word` directive below). If the optional argument `addr` is present, the items are stored beginning at address `addr`.

.word w1, .. ., wn Store the n 32-bit quantities in successive memory words.

2.1.2 SPIM 指令集

算术和逻辑指令⁶：

⁵SPIM Quick Reference: http://acm.sjtu.edu.cn/compiler/spim_ref.html

⁶下面提及的 `Rdest` 为存储结果的寄存器，`Rsrc`, `Rsrc1`, `Rsrc2` 为操作数所在的寄存器，`Src2` 表示这个操作数既可以是立即数也可以是一个寄存器中的数据（即寄存器标号）

| | |
|--|---------------------------------------|
| • abs Rdest, Rsrc | Absolute Value |
| • add Rdest, Rsrc1, Src2 | Addition (with overflow) |
| • addi Rdest, Rsrc1, Imm | Addition Immediate (with overflow) |
| • addu Rdest, Rsrc1, Src2 | Addition (without overflow) |
| • addiu Rdest, Rsrc1, Imm | Addition Immediate (without overflow) |
| • and Rdest, Rsrc1, Src2 | AND |
| • andi Rdest, Rsrc1, Imm | AND Immediate |
| • div Rdest, Rsrc1, Src2 | Divide (with overflow) |
| • divu Rdest, Rsrc1, Src2 | Divide (without overflow) |
| • div Rsrc1, Rsrc2 | Divide (with overflow) |
| • divu Rsrc1, Rsrc2 | Divide (without overflow) |
| Divide the contents of the two registers. Leave the quotient in register lo and the remainder in register hi. Note that if an operand is negative, the remainder is unspecified by the MIPS architecture and depends on the conventions of the machine on which SPIM is run. | |
| • mul Rdest, Rsrc1, Src2 | Multiply (without overflow) |
| • mulo Rdest, Rsrc1, Src2 | Multiply (with overflow) |
| • mulou Rdest, Rsrc1, Src2 | Unsigned Multiply (with overflow) |
| • mult Rsrc1, Rsrc2 | Multiply |
| • multu Rsrc1, Rsrc2 | Unsigned Multiply |
| Multiply the contents of the two registers. Leave the low-order word of the product in register lo and the high-word in register hi. | |
| • neg Rdest, Rsrc | Negate Value (with overflow) |
| • negu Rdest, Rsrc | Negate Value (without overflow) |
| • nor Rdest, Rsrc1, Src2 | NOR |
| • not Rdest, Rsrc | NOT |
| • or Rdest, Rsrc1, Src2 | OR |
| • ori Rdest, Rsrc1, Imm | OR Immediate |

| | |
|---|---------------------------------|
| • <code>rem Rdest, Rsrc1, Src2</code> | Remainder ⁷⁸ |
| • <code>remu Rdest, Rsrc1, Src2</code> | Unsigned Remainder |
| • <code>rol Rdest, Rsrc1, Src2</code> | Rotate Left ⁹ |
| • <code>ror Rdest, Rsrc1, Src2</code> | Rotate Right |
| • <code>sll Rdest, Rsrc1, Src2</code> | Shift Left Logical |
| • <code>sllv Rdest, Rsrc1, Rsrc2</code> | Shift Left Logical Variable |
| • <code>sra Rdest, Rsrc1, Src2</code> | Shift Right Arithmetic |
| • <code>srav Rdest, Rsrc1, Rsrc2</code> | Shift Right Arithmetic Variable |
| • <code>srl Rdest, Rsrc1, Src2</code> | Shift Right Logical |
| • <code>srlv Rdest, Rsrc1, Rsrc2</code> | Shift Right Logical Variable |
| • <code>sub Rdest, Rsrc1, Src2</code> | Subtract (with overflow) |
| • <code>subu Rdest, Rsrc1, Src2</code> | Subtract (without overflow) |
| • <code>xor Rdest, Rsrc1, Src2</code> | XOR |
| • <code>xori Rdest, Rsrc1, Imm</code> | XOR Immediate |

常数操作指令：

| | |
|-------------------------------|------------------------------------|
| • <code>li Rdest, imm</code> | Load Immediate |
| • <code>lui Rdest, imm</code> | Load Upper Immediate ¹⁰ |

比较指令¹¹：

| | |
|--|---------------------------------|
| • <code>seq Rdest, Rsrc1, Src2</code> | Set Equal ¹² |
| • <code>sge Rdest, Rsrc1, Src2</code> | Set Greater Than Equal |
| • <code>sgeu Rdest, Rsrc1, Src2</code> | Set Greater Than Equal Unsigned |

⁷Put the remainder from dividing the integer in register Rsrc1 by the integer in Src2 into register Rdest. Note that if an operand is negative, the remainder is unspecified by the MIPS architecture and depends on the conventions of the machine on which SPIM is run.

⁸On my computer, `rem -5 2` and `rem -5 -2` both return -1 which is same to C++'s remainder.

⁹Rotate the contents of register Rsrc1 left (right) by the distance indicated by Src2 and put the result in register Rdest.

¹⁰Load the lower halfword of the immediate imm into the upper halfword of register Rdest. The lower bits of the register are set to 0.

¹¹对于所有的比较指令，结果为真返回 1，结果为假则返回-1

¹²Set register Rdest to 1 if register Rsrc1 equals Src2 and to be 0 otherwise.

- sgt Rdest, Rsrc1, Src2 Set Greater Than
- sgtu Rdest, Rsrc1, Src2 Set Greater Than Unsigned
- sle Rdest, Rsrc1, Src2 Set Less Than Equal
- sleu Rdest, Rsrc1, Src2 Set Less Than Equal Unsigned
- slt Rdest, Rsrc1, Src2 Set Less Than
- slti Rdest, Rsrc1, Imm Set Less Than Immediate
- sltu Rdest, Rsrc1, Src2 Set Less Than Unsigned
- sltiu Rdest, Rsrc1, Imm Set Less Than Unsigned Immediate
- sne Rdest, Rsrc1, Src2 Set Not Equal

分支与跳转¹³:

- b label Branch instruction.
Unconditionally branch to the instruction at the label.
- beq Rsrc1, Src2, label Branch on Equal
- beqz Rsrc, label Branch on Equal Zero
- bge Rsrc1, Src2, label Branch on Greater Than Equal
- bgeu Rsrc1, Src2, label Branch on GTE Unsigned
- bgez Rsrc, label Branch on Greater Than Equal Zero
- bgezal Rsrc, label Branch on Greater Than Equal Zero And Link

*** bgtzal Rsrc, label Branch on Greater Than Zero And Link
Conditionally branch to the instruction at the label if the contents of Rsrc are greater or equal to 0 or greater than 0, respectively. Save the address of the next instruction in register 31.

- bgt Rsrc1, Src2, label Branch on Greater Than
- bgtu Rsrc1, Src2, label Branch on Greater Than Unsigned
- bgtz Rsrc, label Branch on Greater Than Zero
- ble Rsrc1, Src2, label Branch on Less Than Equal
- bleu Rsrc1, Src2, label Branch on Less Than Equal for Unsigned

¹³ 每条 MIPS 的汇编指令都可以有一个或者多个 label，分支与跳转语句中的 label 就是汇编指令的 label，用于跳转到具有特定 label 的语句，注意 label 是全局唯一的

- `blez Rsrc, label` Branch on Less Than Equal Zero
- *** `blezal Rsrc, label` Branch on Less Than Equal Zero And Link¹⁴
- `bltzal Rsrc, label` Branch on Less Than And Link
Conditionally branch to the instruction at the label if the contents of Rsrc are less than or equal to 0 or less than 0, respectively. Save the address of the next instruction in register 31.
- `blt Rsrc1, Src2, label` Branch on Less Than
- `bltu Rsrc1, Src2, label` Branch on Less Than Unsigned
- `bltz Rsrc, label` Branch on Less Than Zero
- `bne Rsrc1, Src2, label` Branch on Not Equal
- `bnez Rsrc, label` Branch on Not Equal Zero
- `j label` Jump
- `jal label` Jump and Link
- `jalr Rsrc` Jump and Link Register
Unconditionally jump to the instruction at the label or whose address is in register Rsrc. Save the address of the next instruction in register 31.
- `jr Rsrc` Jump Register
Unconditionally jump to the instruction whose address is in register Rsrc.

Load 指令¹⁵:

- `la Rdest, address` Load Address¹⁶
- `lb Rdest, address` Load Byte
- `lbu Rdest, address` Load Unsigned Byte
Load the byte at address into register Rdest. The byte is sign-extended by the lb, but not the lbu, instruction.
- `ld Rdest, address` Load Double-Word
Load the 64-bit quantity at address into registers Rdest and Rdest + 1.
- `lh Rdest, address` Load Halfword

¹⁴这条指令在 wiki 上面没有

¹⁵从指定的内存地址读取数据并且保存到指定的寄存器，内存地址以 `offset(Rhead)` 或者是 `label` 的形式给出，即，寄存器中的首地址 + 偏移量，偏移量可正可负

¹⁶Load computed address, not the contents of the location, into register Rdest.

- `lhu Rdest, address` Load Unsigned Halfword
Load the 16-bit quantity (halfword) at address into register Rdest. The halfword is sign-extended by the `lh`, but not the `lhu`, instruction
- `lw Rdest, address` Load Word
Load the 32-bit quantity (word) at address into register Rdest.

Store 指令¹⁷:

- `sb Rsrc, address` Store Byte
Store the low byte from register Rsrc at address.
- `sd Rsrc, address` Store Double-Word
Store the 64-bit quantity in registers Rsrc and Rsrc + 1 at address.
- `sh Rsrc, address` Store Halfword
Store the low halfword from register Rsrc at address.
- `sw Rsrc, address` Store Word
Store the word from register Rsrc at address.

数据移动指令:

- `move Rdest, Rsrc` Move
Move the contents of Rsrc to Rdest.
- `mfhi Rdest` Move From hi
- `mflo Rdest` Move From lo
Move the contents of the hi (lo) register to register Rdest.

特殊指令:

- `nop` No operation
Do nothing.¹⁸
- `syscall` System Call
Register `v0` contains the number of the system call (see System Services) provided by SPIM.¹⁹

系统调用:

¹⁷从指定的内存地址读取数据并且保存到指定的寄存器，内存地址以 `offset(Rhead)` 或者是 `label` 的形式给出

¹⁸注意一下，这里的 `Do nothing` 并不是什么都不做，而是执行一条指令，指令的目的是什么都不做，它会在占用流水线并且按照 5-stage 的划分在每个阶段都占用相应的部分，这条指令主要是调试代码的时候使用。可以在每条语句执行之后插入 `nop` 指令，这样程序员就可以清楚的知道每一条指令的执行结果。

¹⁹只需要模拟下面提到的几个系统调用即可

| 系统调用编号 | 说明 | 参数 | 结果 |
|--------|---------------------------|--|-------------------------------------|
| 1 | 输出一个整数 | \$a0: 需要输出的整数 | N/A |
| 4 | 输出一个字符串, 这个字符串要求以'\0' 结尾 | \$a0: 字符串的第一个字符的地址 | N/A |
| 5 | 读入一个整数 | N/A | 读入的整数保存在 \$v0 |
| 8 | 读入一个字符串 | \$a0: 存放读入字符串的缓冲区 \$a1: 读入最长的长度+1 ²⁰ | N/A |
| 9 | 分配堆内存 | \$a0: 需要申请的连续的内存长度 ²¹ | \$v0: 申请结果, 即内存片段的首地址 ²² |
| 10 | 结束运行 | N/A | N/A |
| 17 | 结束运行 (有返回值) ²³ | \$a0: 程序运行结束的返回值 | N/A |

2.2 统计要求

要求在模拟器中加入统计功能, 能够计算出程序从开始运行到结束运行一共执行了多少条指令, 能够分别记录算术, 跳转, load, store 的指令数。

2.3 细节要求

2.3.1 5 级流水划分

Instruction Fetch 取指令阶段, 按照 PC 寄存器²⁴的值去指定的内存位置读取指令并且加载到寄存器中。

Instruction Decode & Data Preparation 对 Instruction Fetch(IF) (取指令) 阶段得到的指令进行解码, 并且准备计算所需要的数据

Execution 执行完成这个条指令必要的运算, 对于算术和逻辑运算, 那么计算出运算结果, 对于内存操作, 那么计算出实际需要 load/store 的内存地址²⁵, 对于分支指令, 可以不用执行运算, 但是实际上的 MIPS 的 CPU 是通过当前的 PC 寄存器的值 + 一个跳转指令的偏移量计算出最终的跳转位置。

¹⁹如果要读入'abc', 那么 \$a1 应该设置成 4 或者更大

²⁰单位: 字节

²¹注意返回的地址要求首地址对齐到 2²

²²C 语言中的 exit() 函数

²⁴表示当前执行到了那个内存地址的指令, 这是一个特殊的寄存器, 程序员无法直接修改这个寄存器的值

²⁵实际内存地址通过首地址 + 偏移量的形式给出, 所以需要进行一次加法操作

Memory Access 访问内存，完成 load/store 指令中要访问内存的部分。

Write Back 回写，把算术，或者逻辑运算的结果写到指定寄存器，把从内存中 load 到的数据写入指定的寄存器。对于分支语句，在这个阶段会改写 PC 寄存器。

2.3.2 寄存器读写顺序

由于流水线的存在，所以可能在同一个 CPU 时钟周期里面既要读寄存器又要写寄存器，先读还是先写会影响结果的正确性，所以我们规定，同一个 CPU 时钟周期里面先写寄存器，再读寄存器²⁶

2.3.3 对于 Hazard 的处理

流水线在处理的过程中由于各种原因会导致流水线不能像期望的那样正常工作，下面有三大类 Hazard²⁷：

Structure Hazard 由于内存是总线上的设备，而总线的特性是同一时间²⁸只能接受并执行一个任务请求，即不能再一个周期里面同时执行读取和写入（或者两个读取内存的操作）内存的操作，因此会造成流水线不能正常工作。举个例子，在每条指令的 IF 阶段都需要读取内存获取相应的内存，而第四个阶段 Memory Access(MEM) 中 load/store 指令也会读取或者写入内存，因此会造成总线的操作冲突，流水线因此停滞。

Data Hazard 由于寄存器的内容只有当指令执行到第五个 Write Back 阶段才会更新，所以，对于数据有依赖的情况，流水线就不能正常的运转，需要等在前一个指令完全完成操作才行。

Control Hazard 对于分支语句和跳转语句之后的语句不能轻易的上流水线，所以就会造成流水线停滞。

当 Hazard 发生的时候，模拟器应采取最暴力的做法，等待 Hazard 消失，然后重新启动流水线。

注意：指令 *syscall* 是一个特殊的指令，这个指令会使用 \$v0, \$a0, \$a1 这三个寄存器的值，所以如果出现了相关的数据依赖关系，那么会产生一个 Data Hazard。同时 *syscall* 本身是一个跳转指令（虽然它在执行中并不会程序员感觉到它是一个跳转指令），所以会造成 Control Hazard。至于 *syscall* 指令的结果应该在第 5 个阶段的时候和普通的指令一样写回寄存器。

3 MIPS 汇编语言快速介绍

3.1 汇编语法

```
(Label ':')* (Instruction | Directive) NEWLINE
```

²⁶如果把一个周期分成两个半周期，那么可以简单的认为，前半周期写，后半周期读

²⁷在 CAAQA 的中文版中，Hazard 被翻译成冒险，但是几乎所有的人都认为这个翻译并不是那么合理，所以我在这里就直接使用英文而不是用中文翻译

²⁸1 个时钟周期

Label 由字母（大小写敏感，数字和下划线以及其他一部分的可见符号²⁹）构成的字符串，每一个 Label 后面有一个冒号，一个语句可以有一个或者多个 Label³⁰。

Instruction MIPS 汇编指令

Directive 汇编器指令，用于分配静态内存空间，说明代码的存放位置。

NEWLINE 换行符

3.2 汇编语言执行细节

在正式执行汇编程序之前，汇编器会读取整个文件，按照文件的顺序理解每一个语句，如果这条语句是汇编器指令，那么就会按照要求执行相应的操作，例如分配一定长度的内存，对于出现在 data 区的 Label，改 Label 指向的是这个 Label 后面一个 data 成员的内存地址。例如

```
.word 5
static_b:
.word 10
```

其中 `static_b` 在内存中指向如图1。

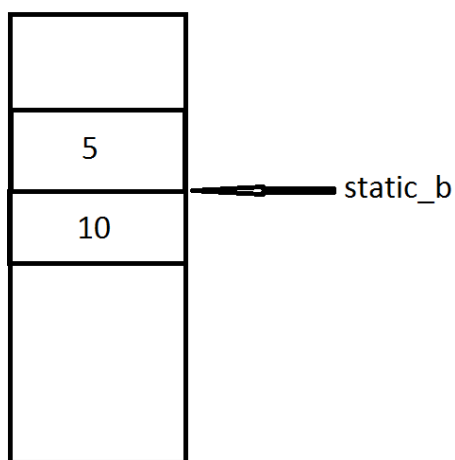


图 1: `static_b` 指向的位置

3.3 内存细节

MIPS 的内存分配有一定顺序，栈空间从高地址开始到低地址，堆空间和静态空间从低地址开始到高地址，如图2，对于之前的那个例子，如果执行 `lw $t1, static_b`，则 `$t1` 的值是 10。

²⁹具体有哪些符号可以用并没有尝试过

³⁰Label 可以理解为指针，指向特定的内存地址

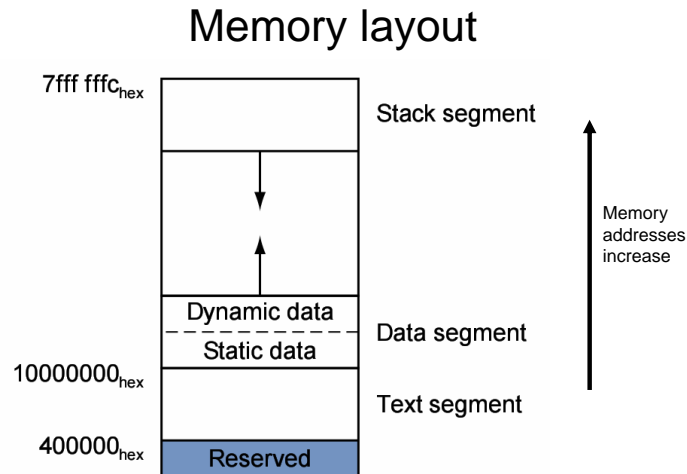


图 2: 内存分配

3.4 寄存器的初始化

PC 寄存器指向第一条指令, \$sp 寄存器指向栈的最高地址 ($0x80000000$), 但是实际运行的时候由于运行时参数的原因 \$sp 会指向比 $0x80000000$ 低的地址, 具体情况可以参考 QtSpim 的 Data 区显示。³¹

3.5 多字节 load/store 指令实现细节

对于单字节的 lb 和 sb 指令, 模拟器精确地操作相应地址的内存区域, 对于多字节的 load 和 store 指令做出如下约定:

对于 lh 和 sh 从 $addr+1$ 读取最低的 8 位 (0-7), 从 $addr$ 读取 8 位 (8-15)³² 或把最低的 8 位写入到 $addr+1$, 把 (8-15) 写入到 $addr$

对于 lw 和 sw 最低的 8 位对应 $addr+3$, (8-15) 对应 $addr+2$, (16-23) 对应 $addr+1$, (24-31) 对应 $addr$ 。

3.6 其余细节

等待 Q&A 之后补充

4 更新日志

4.1 7 月 3 日

增加了几条 MIPS 指令的实现要求:

³¹由于执行时的参数在测试数据中应该不会出现, 所以可以简单的把 \$sp 寄存器的值定为 $0x7fffffc$

³² $addr$ 为传给指令的参数

- `div Rsrc1, Rsrc2` Divide (with overflow)
- `divu Rsrc1, Rsrc2` Divide (without overflow)
 Divide the contents of the two registers. Leave the quotient in register `lo` and the remainder in register `hi`. Note that if an operand is negative, the remainder is unspecified by the MIPS architecture and depends on the conventions of the machine on which SPIM is run.
- `mult Rsrc1, Rsrc2` Multiply
- `multu Rsrc1, Rsrc2` Unsigned Multiply
 Multiply the contents of the two registers. Leave the low-order word of the product in register `lo` and the high-word in register `hi`.
- `mfhi Rdest` Move From hi
- `mflo Rdest` Move From lo
 Move the contents of the `hi (lo)` register to register `Rdest`.

4.2 7 月 4 日

修改了一条指令的说明，增加了一条指令的实现要求：

- *** `bgtzal Rsrc, label` Branch on Greater Than Zero And Link
- *** `blezal Rsrc, label` Branch on Less Than Equal Zero And Link³³

³³这条指令在 wiki 上面没有