




# Here Be The ISA Expansion Bus

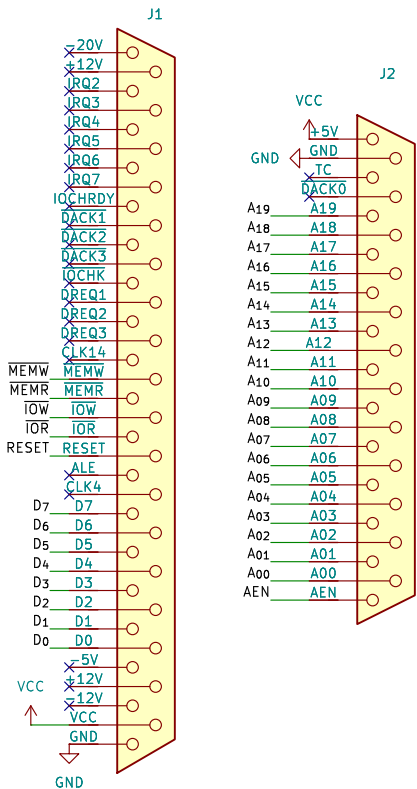


# Signal buffering

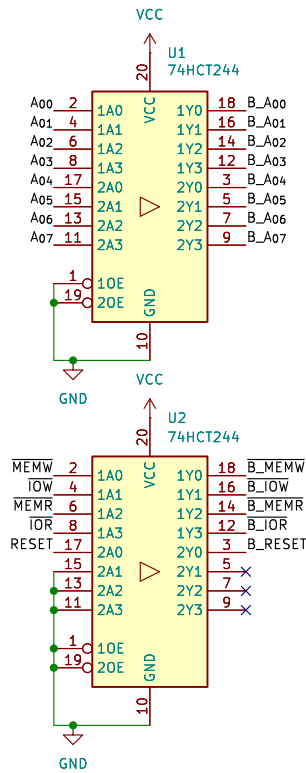


# I/O Port Chip Select Logic

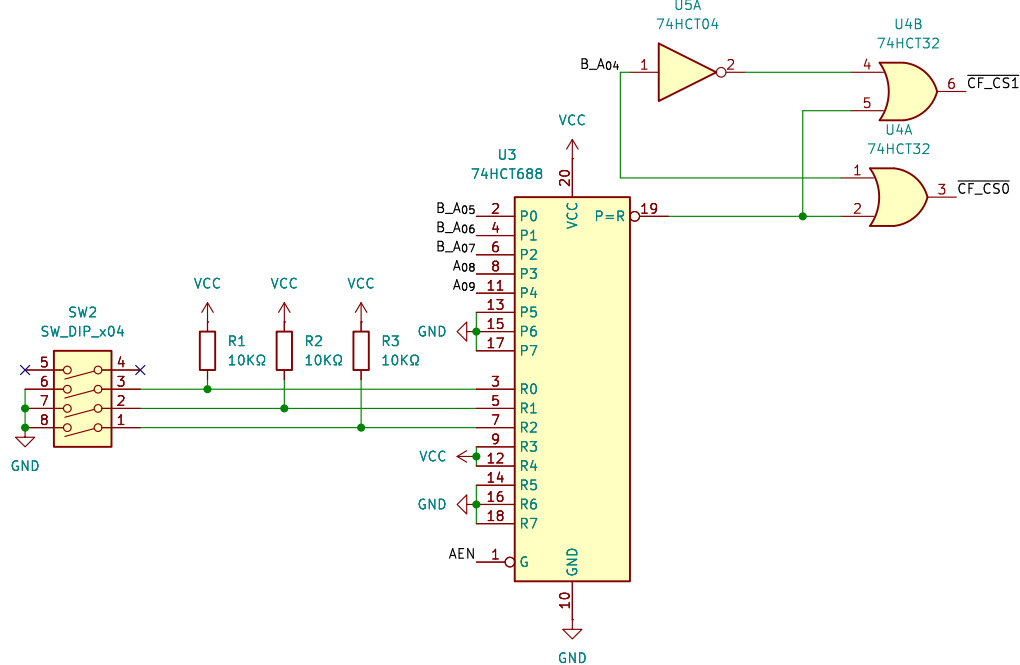


# Compact Flash Interface

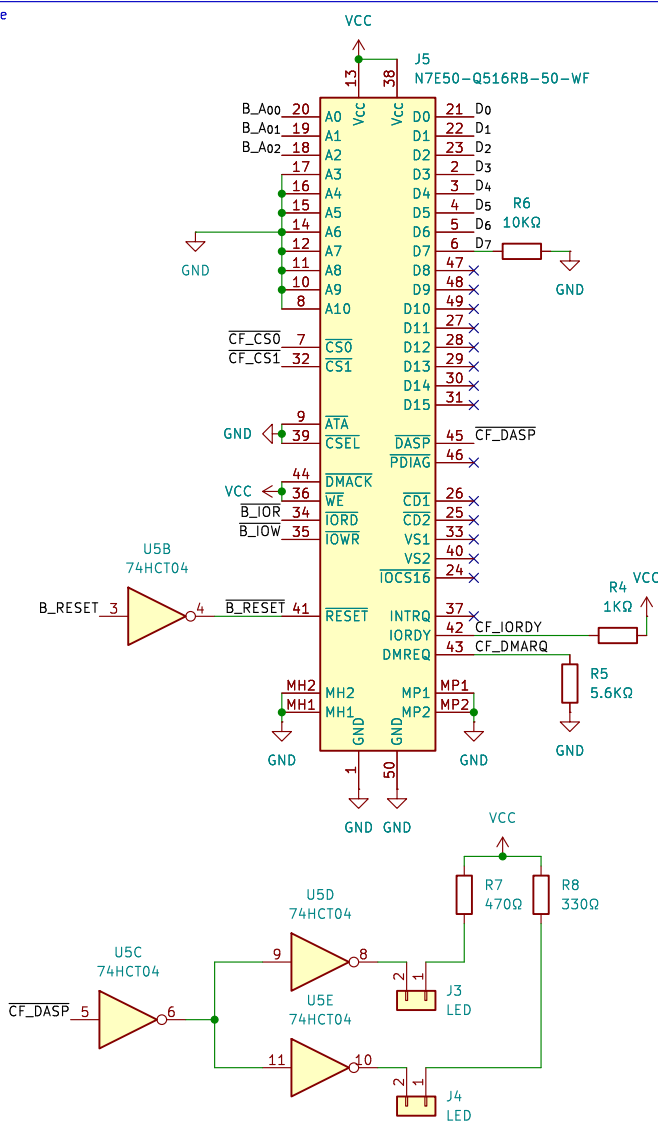


# BIOS Extension ROM

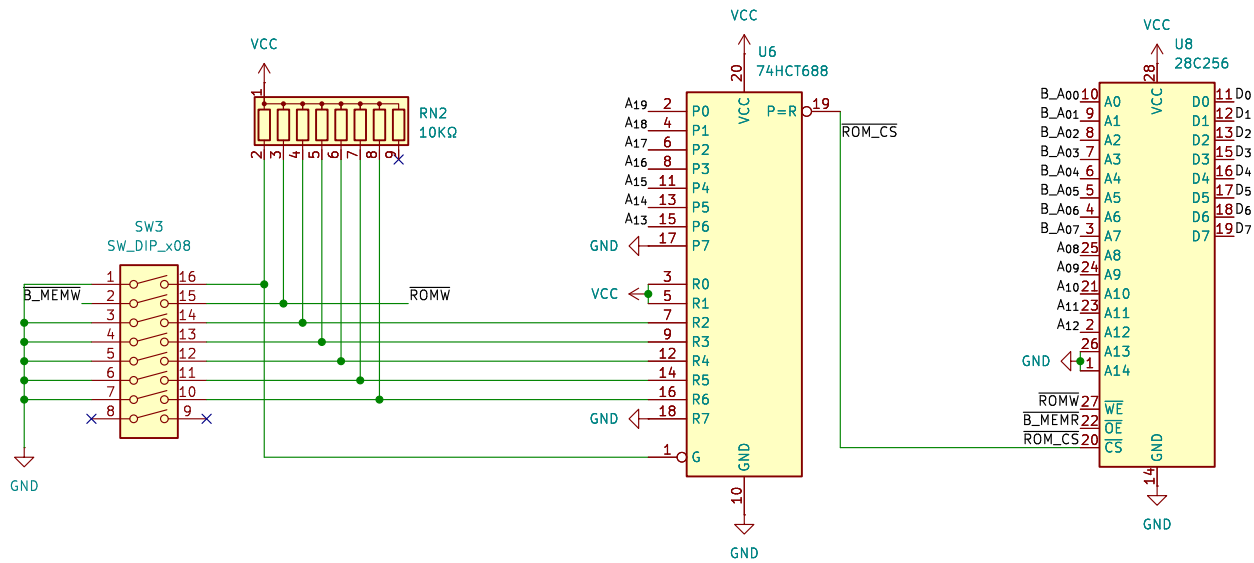


# Data Signal Pullup




# MODEM Board Mounting Holes

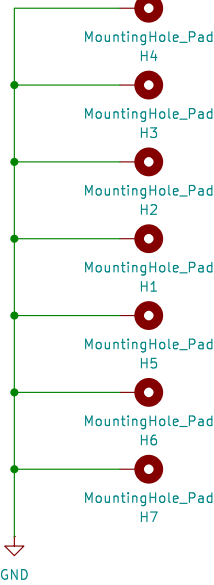

# Power & Bypass Capacitors

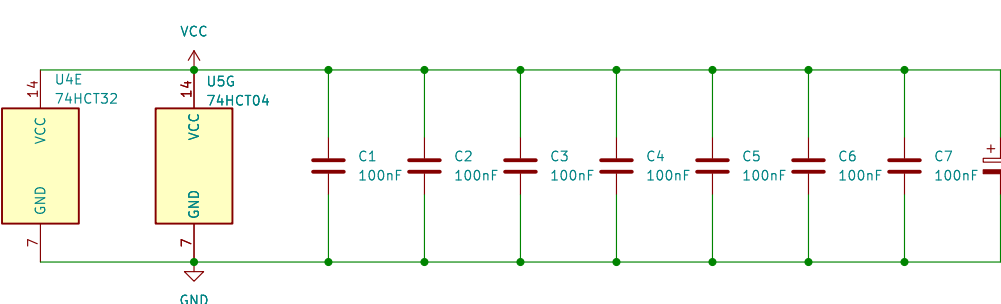

# Spare Gates

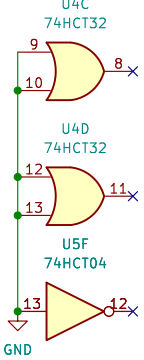

The design is based on Sergey Kiselev's XT-CF-Lite board [www.malnov.com/Home/sergeys-projects/xt-cf-lite](http://www.malnov.com/Home/sergeys-projects/xt-cf-lite)

The EEPROM could be a 28C64 as the BIOS is only 8KB.

Changes requires for internal mounting in the Amstrad PPC:

[1] The following signals are generated directly from the internal gate arrays and should be buffered with a non-inverting buffer (i.e. 72HC244):  
A00 to A07, MEMW, MEMR, IOW, IOR, RESET  
(there are others but irrelevant for our purposes)

[2] The data signals (D0 to D7) are at CMOS levels and should be pulled up to TTL levels with 10KΩ resistors

[3] The internal modem board we are replacing is roughly 200x120mm

[4] Technically the PPC should be powered by the "expansion unit" and not the other way around ... don't tell anyone