




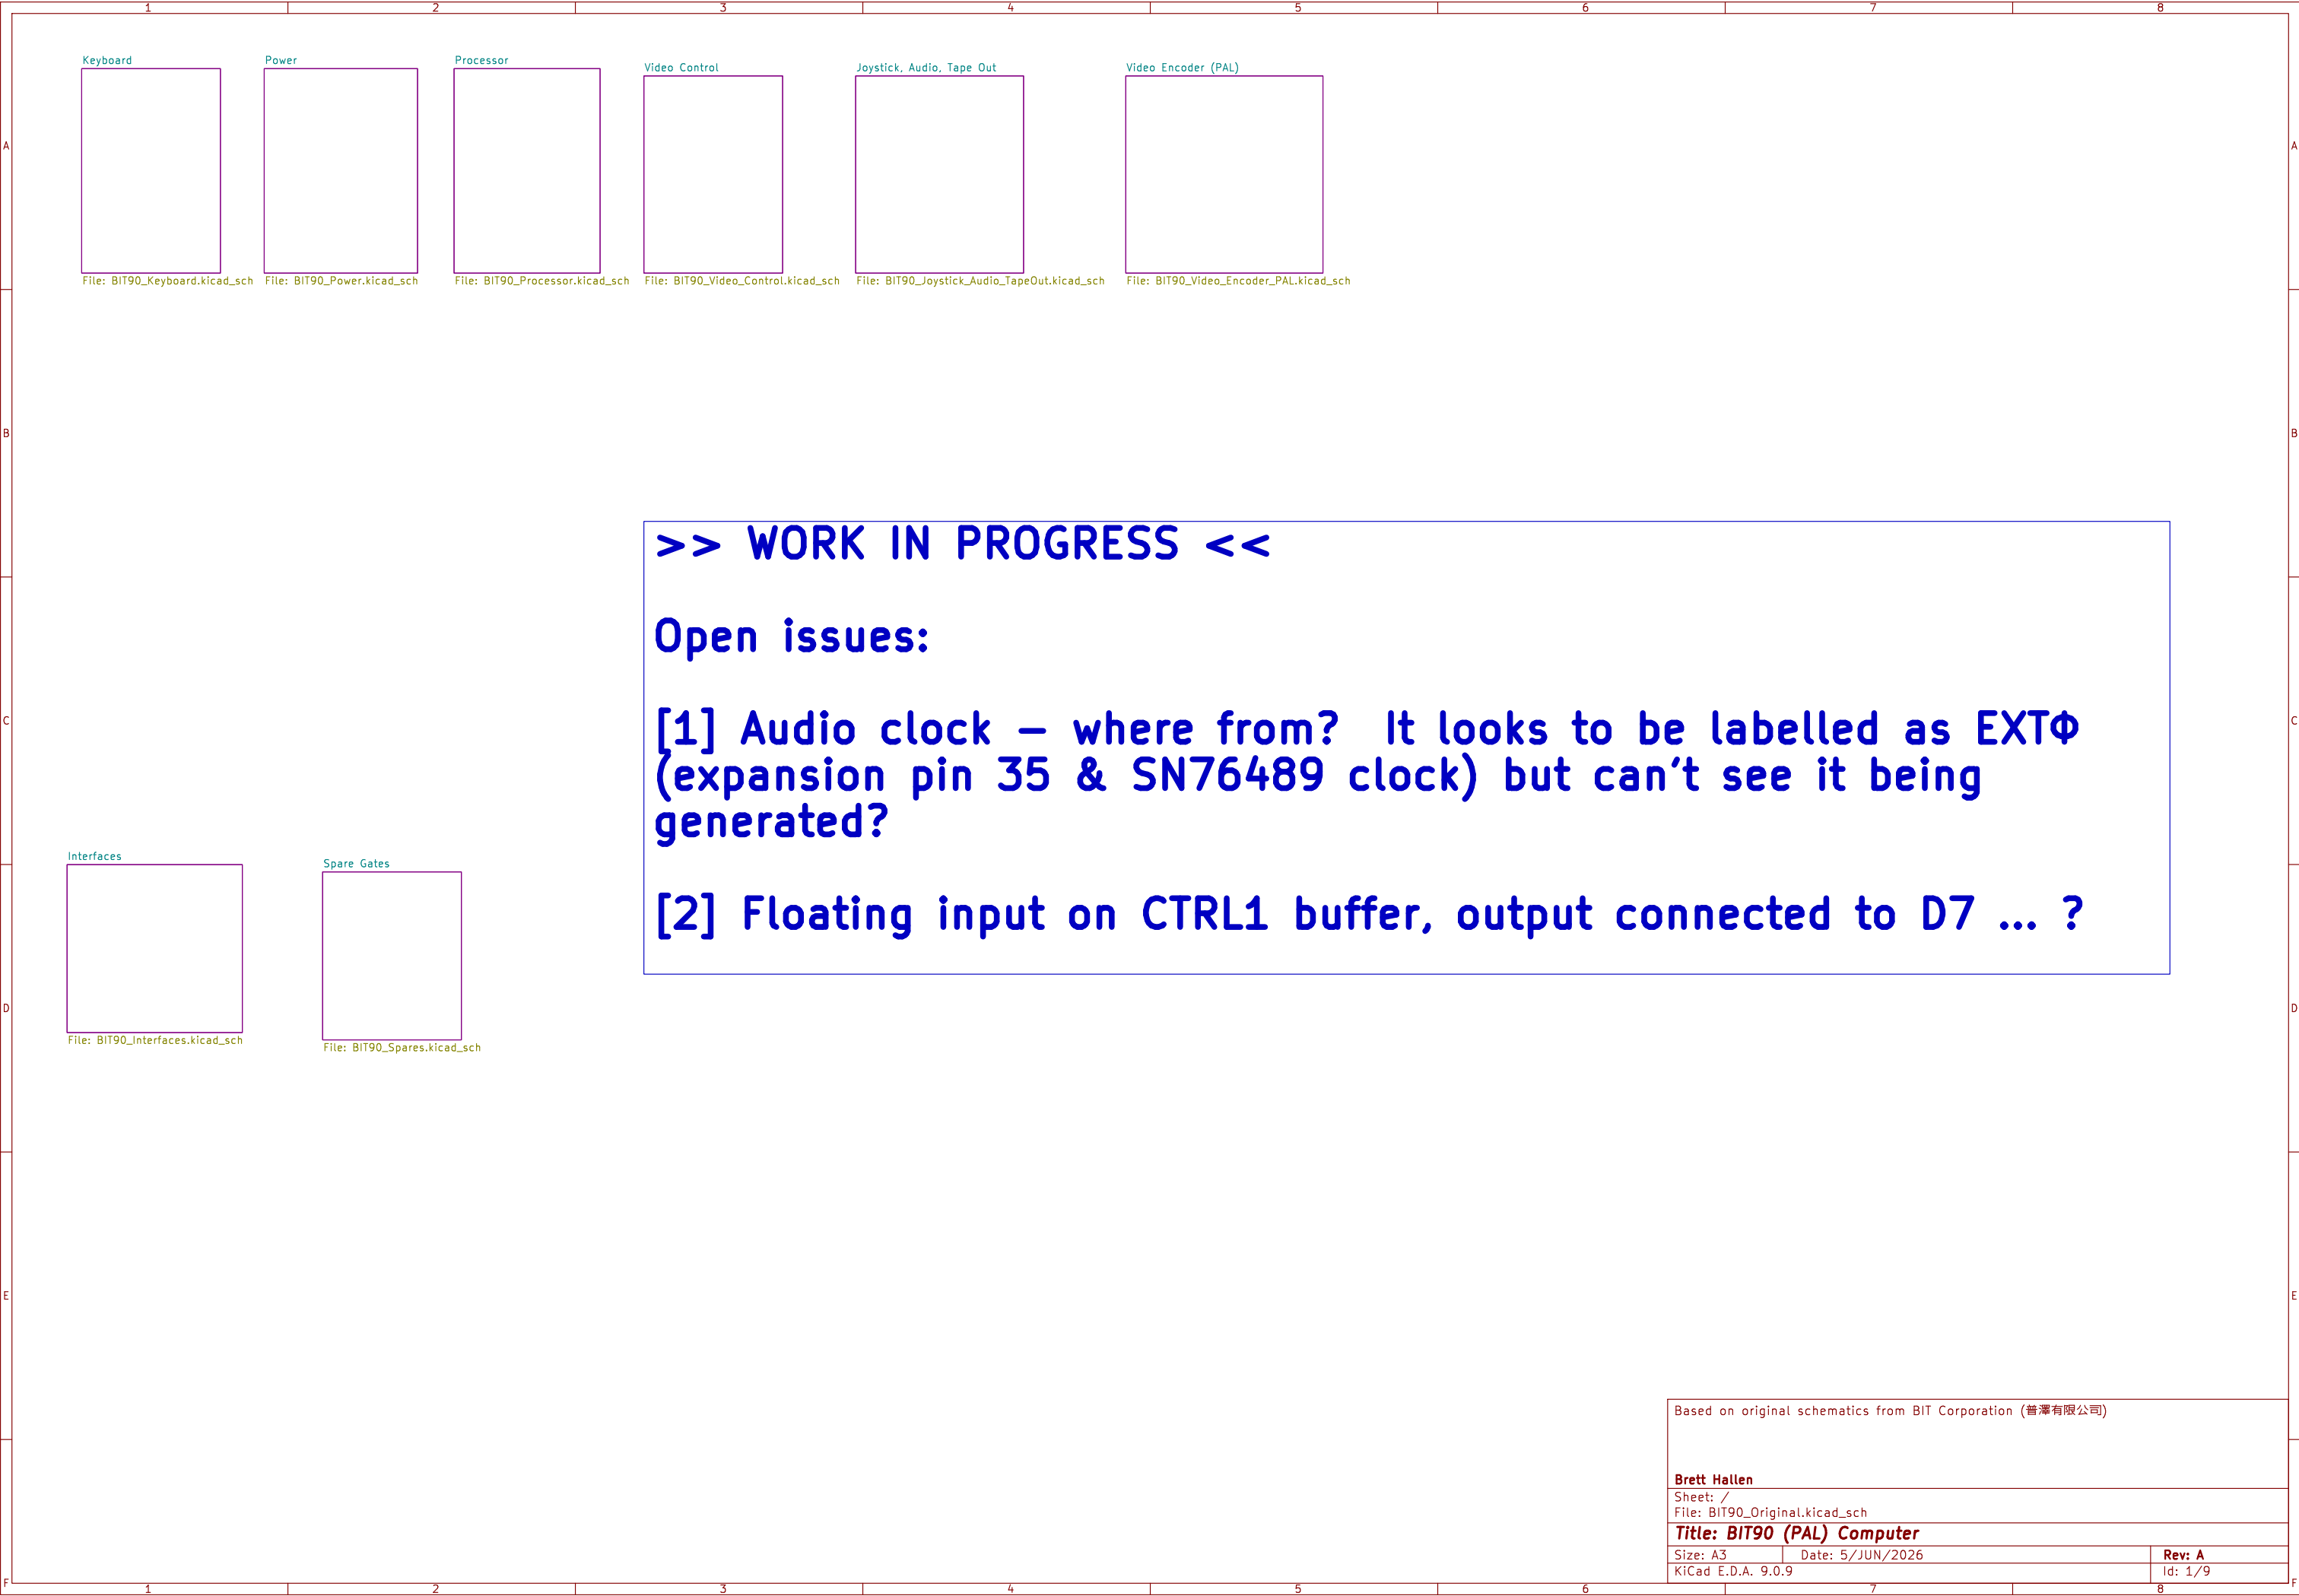


Keyboard Matrix

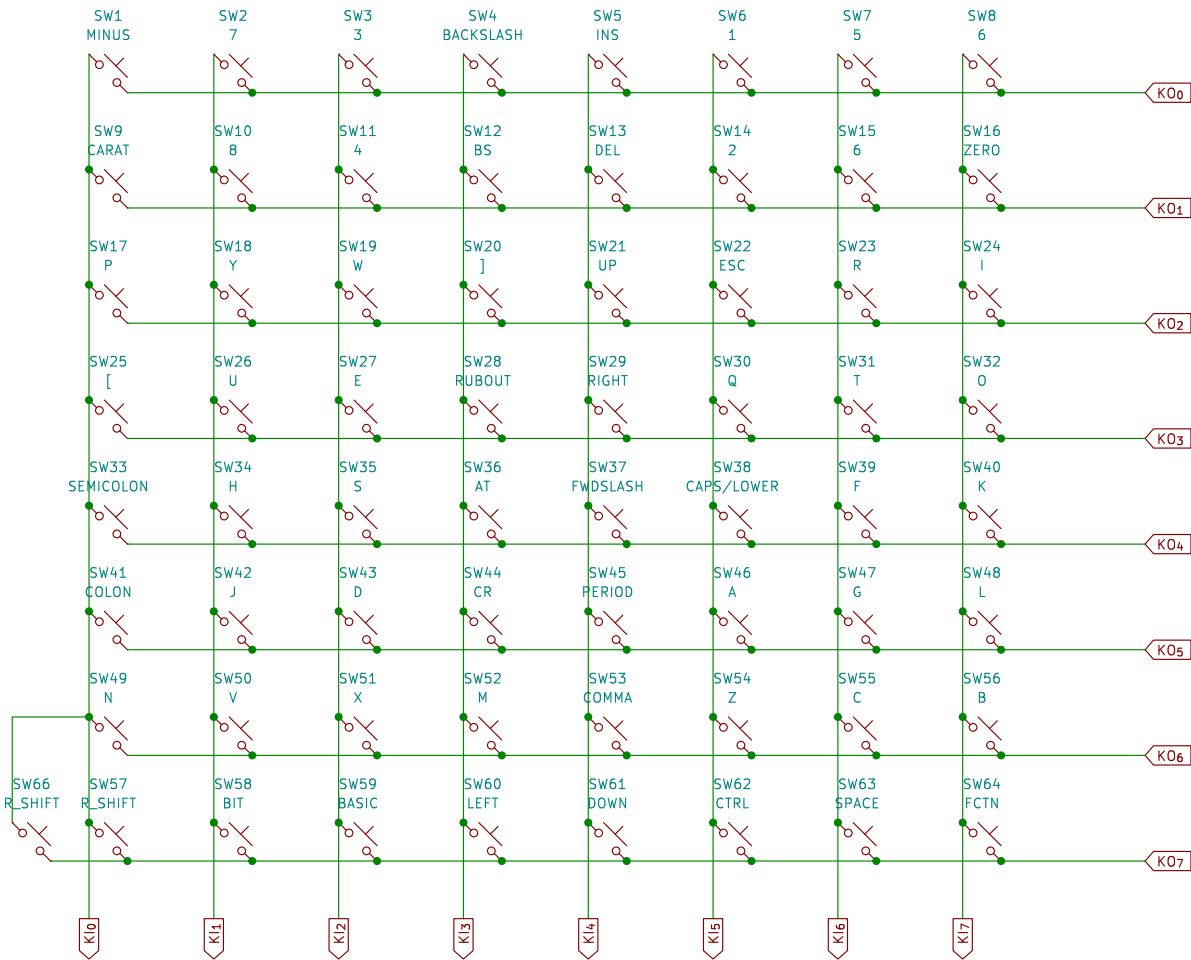

Keyboard Row Outputs
Tape Dump

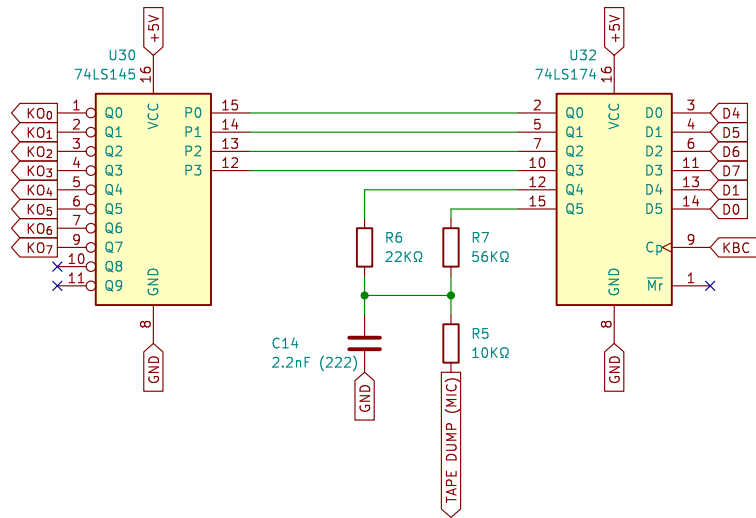

Keyboard Column Inputs

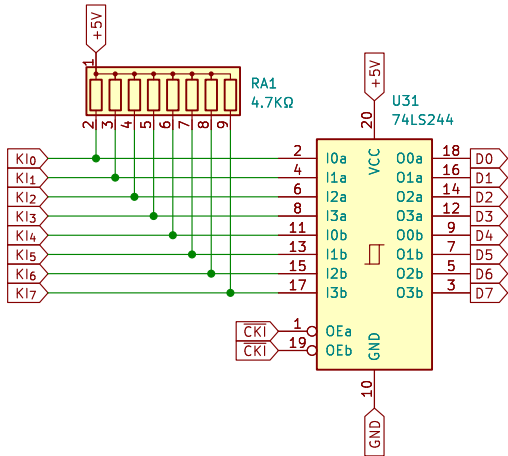

Based on original schematics from BIT Corporation (普澤有限公司)
From Sheet 6-4
[RST] is on Processor sheet

Brett Hallen


Sheet: /Keyboard/
File: BIT90_Keyboard.kicad_sch






Title: BIT90 Keyboard

Size: A3 Date: 5/JUN/2026

KiCad E.D.A. 9.0.9

Rev: A
Id: 2/9

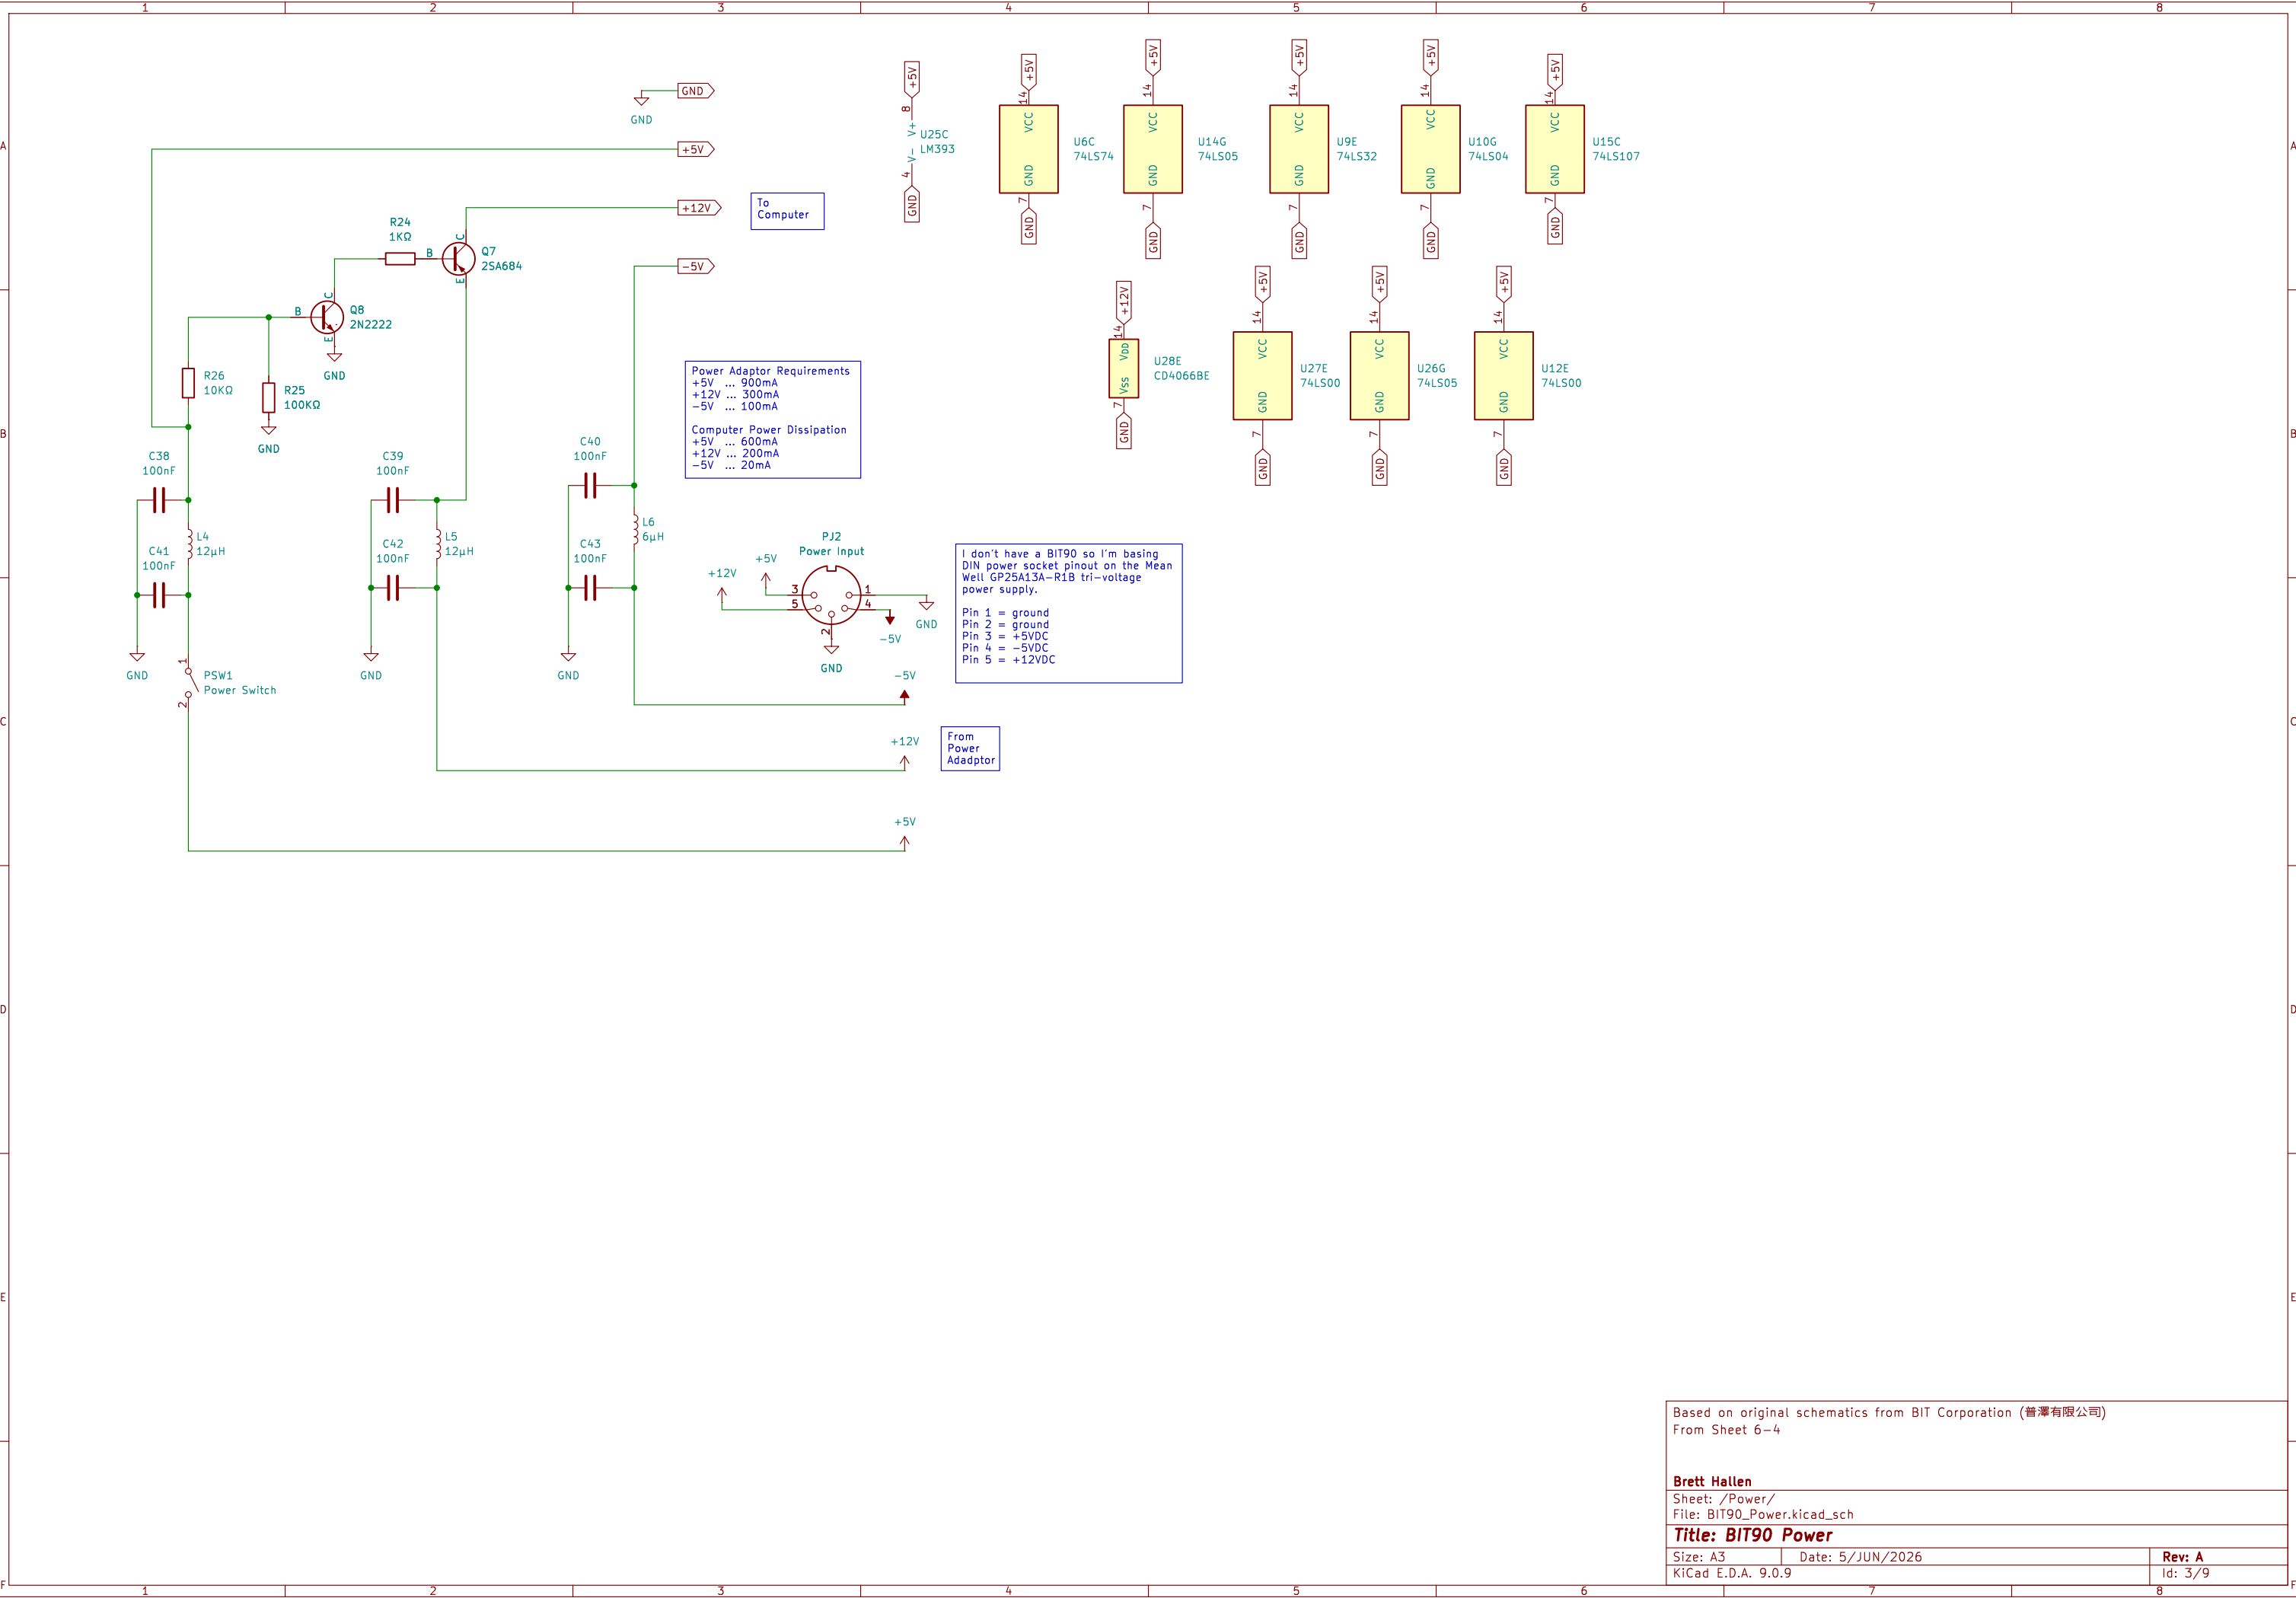

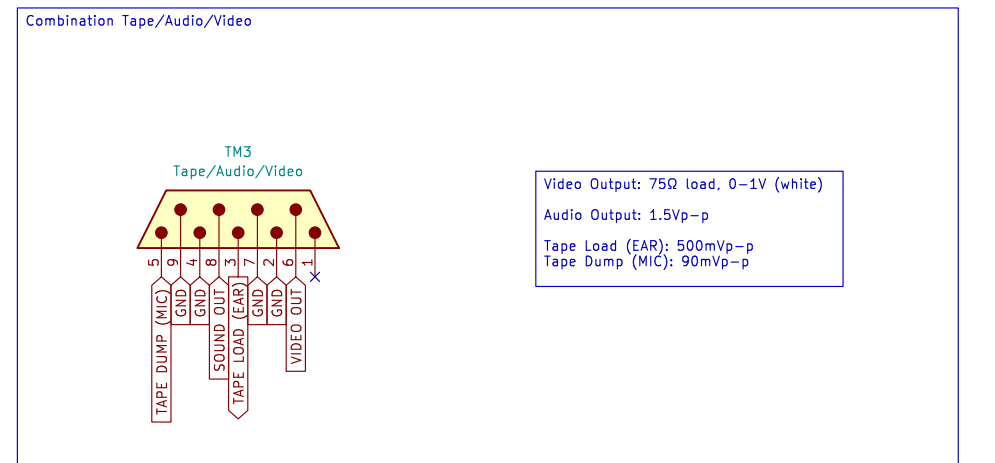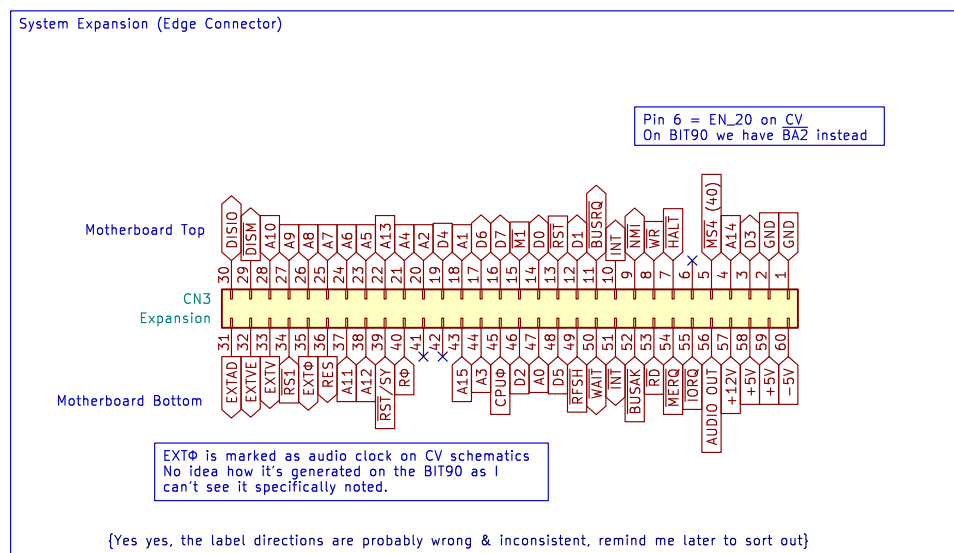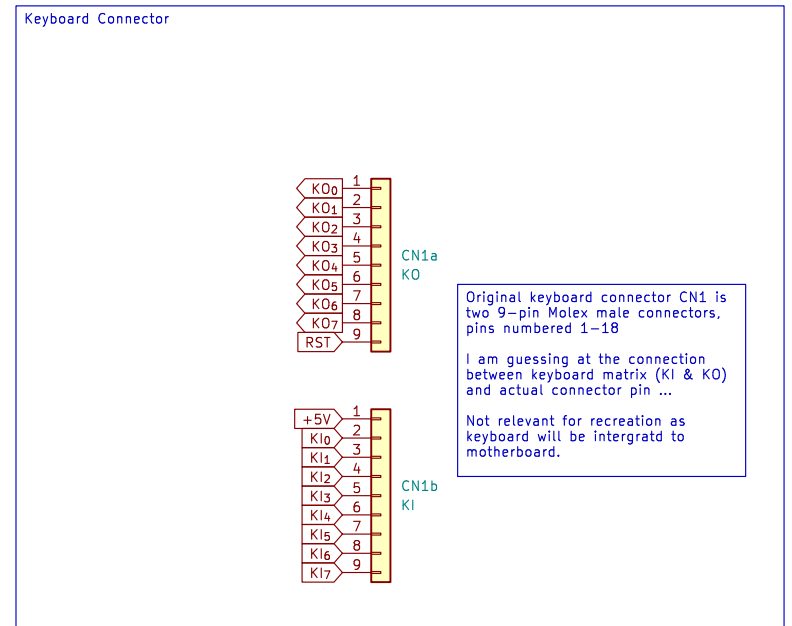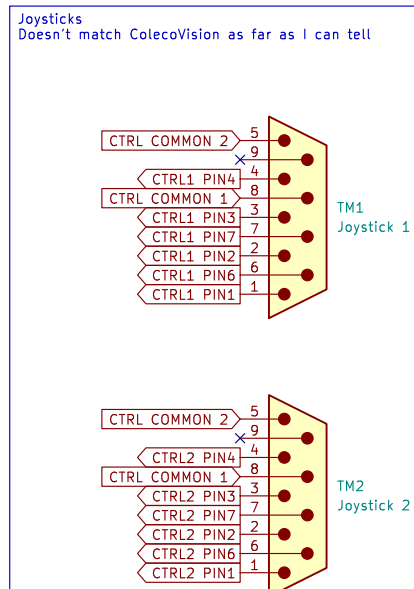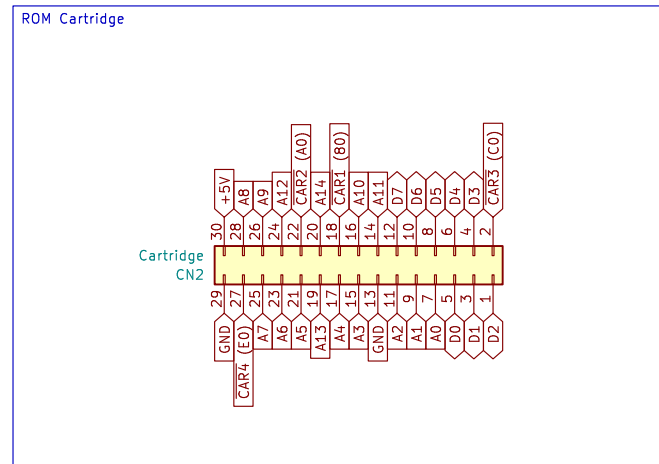

Based on original schematics from BIT Corporation (普澤有限公司)

Brett Hallen

Sheet: /Interfaces/
File: BIT90_Interfaces.kicad_sch

Title: BIT90 Interfaces

Size: A3	Date: 5/JUN/2026
----------	------------------

KiCad E.D.A. 9.0.9


Date: 5/JUN/2026

KiCad E.D.A. 9.0.9

Rev: A


Id: 4/9

Chip Select

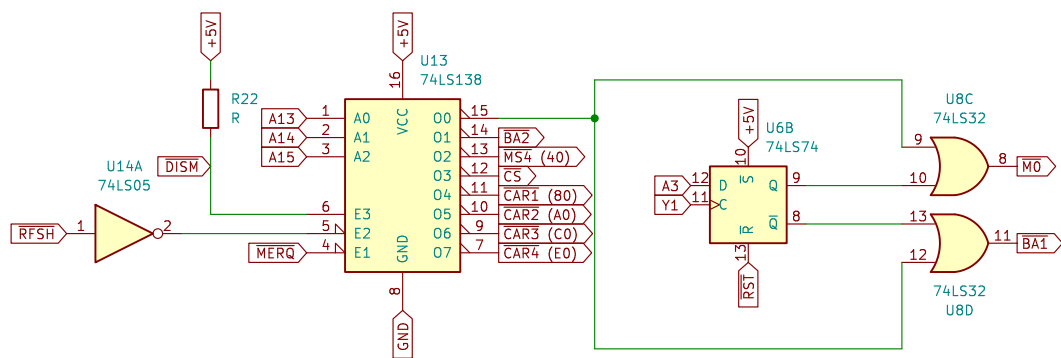

M0	Monitor
BA1 & BA2	BASIC
CS	System RAM
CAR1 to CAR4	Cartridge


System ROM

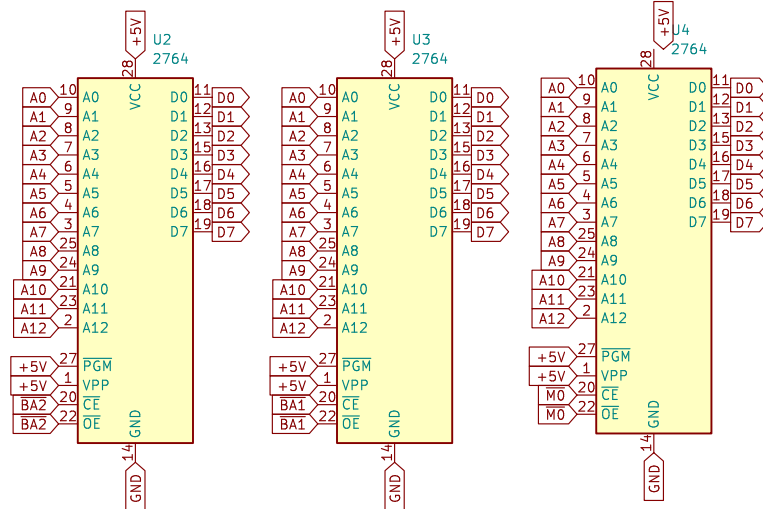


Note! Original board can have 2364 masked ROMs (24-pin), 2764 EPROMs (28-pins), or both. There are three jumper blocks (J1/J2/J3) that configure each ROM socket. For simplicity they are all represented as 2764 here.

Example:
U2 ... D32522E/MONITOR3 (2364)
U3 ... D32521E (2764)
U4 ... D32351E/BIT-99C1 (2364)

CPU & Reset Circuit

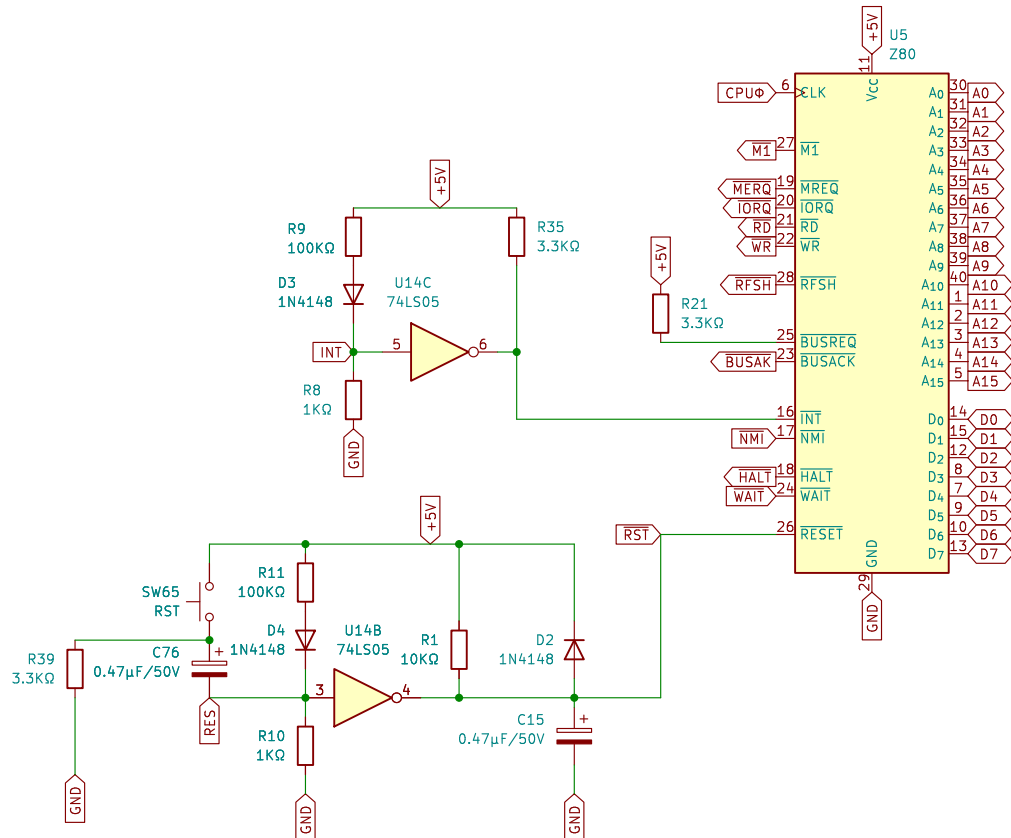

System RAM

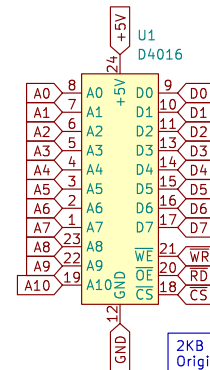

2KB System RAM
Original part specified as TC5517

Based on original schematics from BIT Corporation (普澤有限公司)
From Sheet 6-1


Brett Hallen

Sheet: /Processor/
File: BIT90_Processor.kicad_sch

Title: **BIT90 Processor**

Size: A3 Date: 5/JUN/2026
KiCad E.D.A. 9.0.9

Rev: A
Id: 5/9

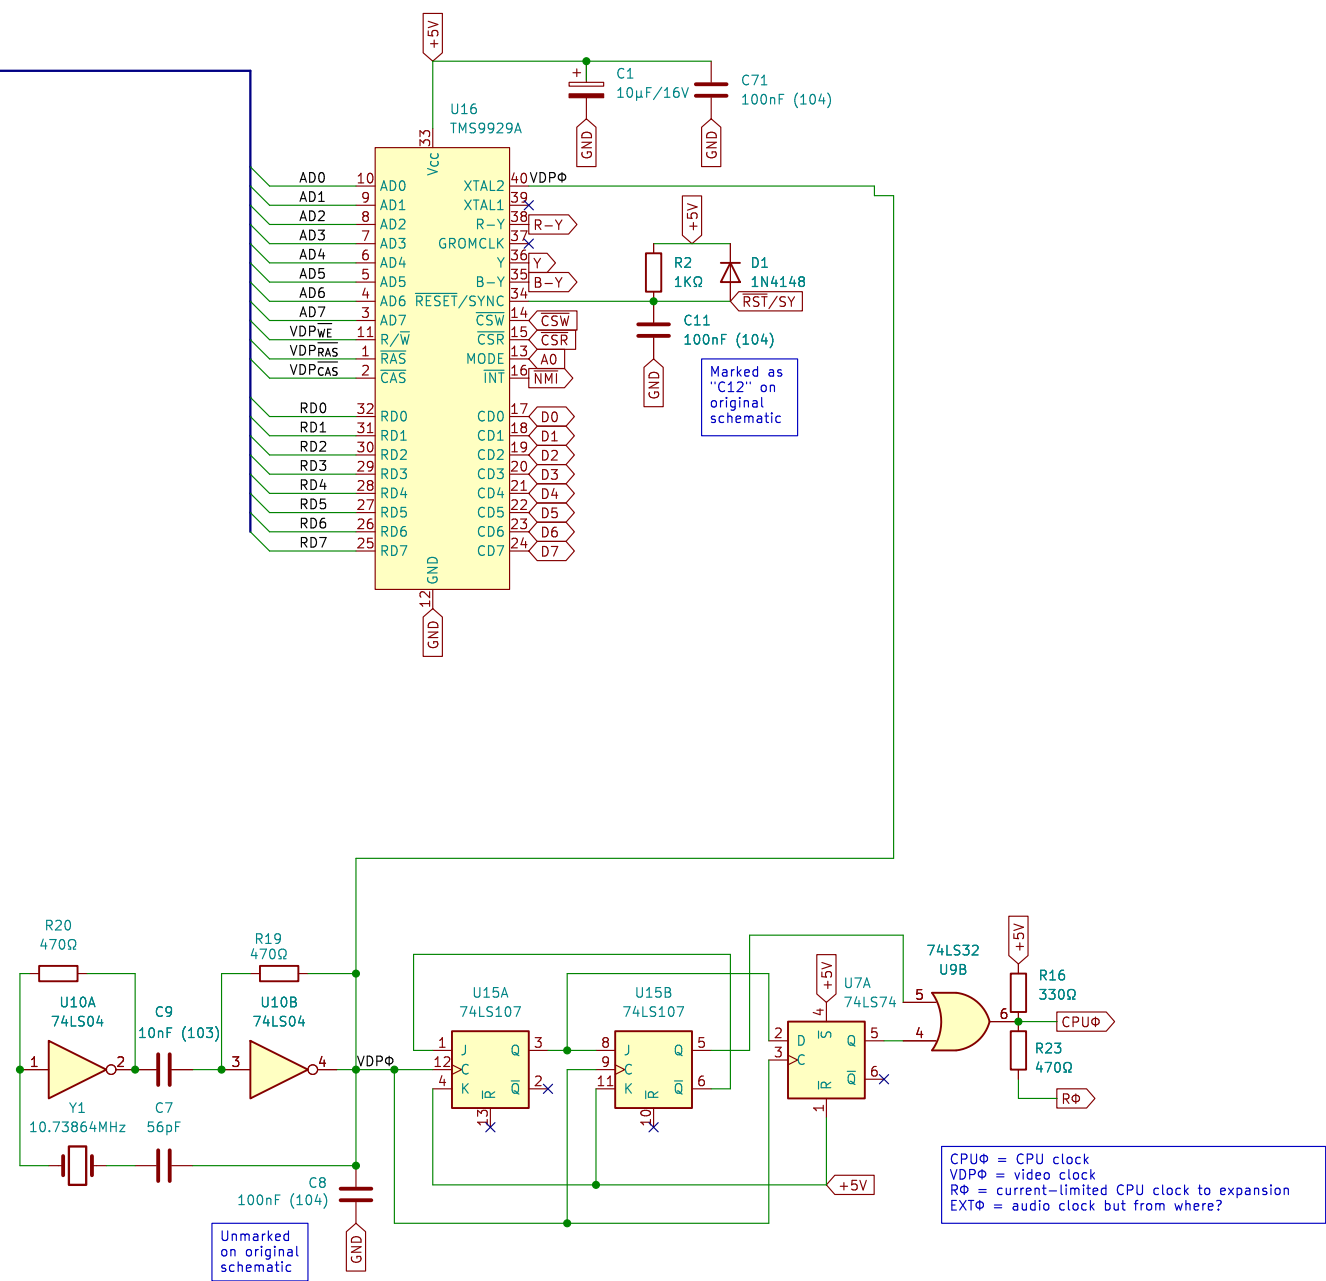

Rev: A
Id: 7/9

