

4

3




2

1

used for:

D-SUB

POS.	A -0.76	B $+0.25$	C	D -0.3	PART-NO.
9	31.19	16.79	25.00 $+0.12$ -0.13	6.12	DLS1XP5AK40X
15	39.52	25.12	33.30 $+0.15$ -0.1	6.12	DLS2XP5AK40X
25	53.42	38.84	47.04 ± 0.13	5.99	DLS3XP5AK40X
37	69.70	55.30	63.50 ± 0.13	5.99	DLS4XP5AK40X

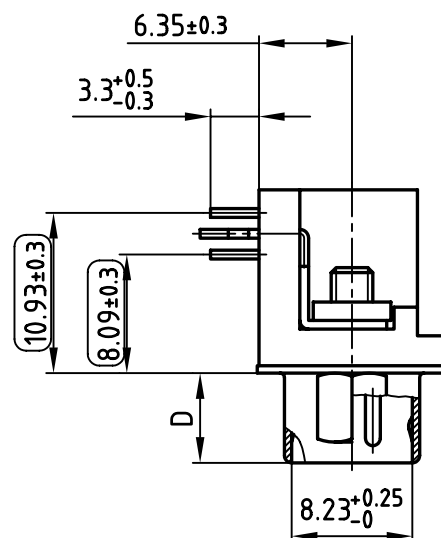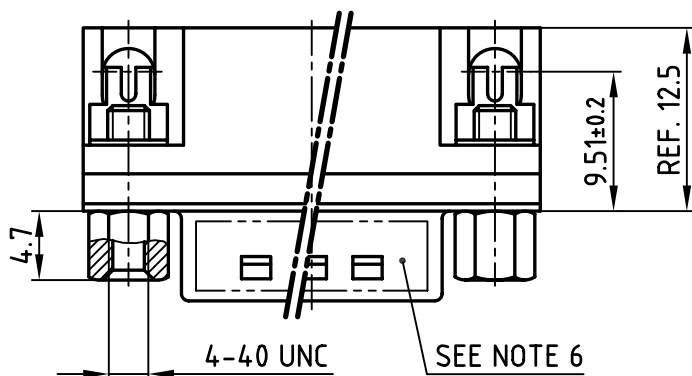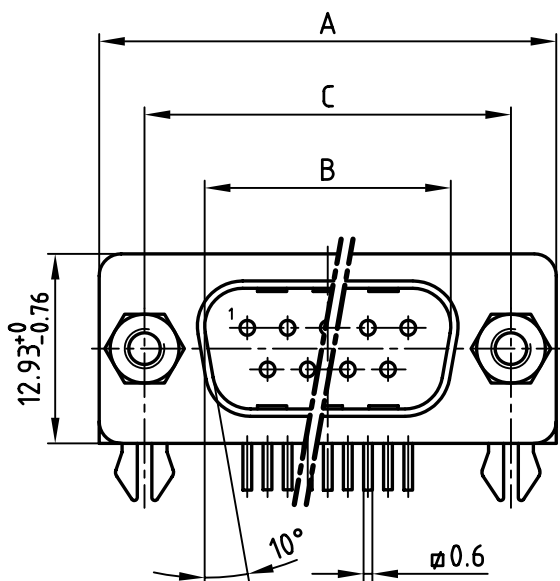


Directive 2002/95/EC
"RoHS"
Compliant

NOTES:

- METALSHELLS: STEEL; min. 320 μ " TIN
- INSULATORS: PA UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
- PCB-CLIP: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- P.C.B. HOLE DRILLINGS SEE SHEET 2
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
- = CHECK DIMENSION

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
				2005	date	name
				drawn	27.06.	Lehmenkühler
				appd.	27.06.	Kühle
				norm	DIN 41652	
				d-old		
						
rev.	description	date	name			

scale:	2:1
material:	SEE NOTES
title:	D-SUB MALE 90° 9-37pos. pin angled 0.318", stamped contacts with threaded lock and clip
dwg no:	AutoCAD 2004
part no:	SEE TABLE

4

3

2





1

CONEC

D-SUB MALE 90°

9-37pos. pin angled 0.318", stamped contacts
with threaded lock and clip

dwg no: AutoCAD 2004
part no: SEE TABLE

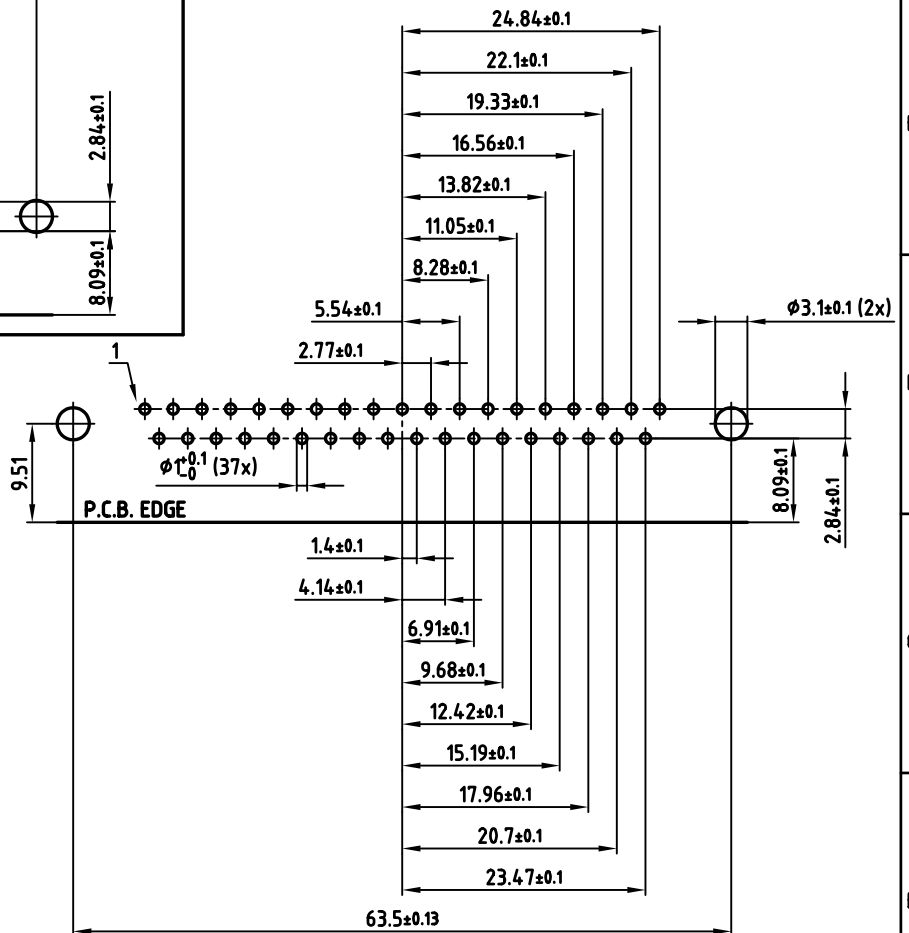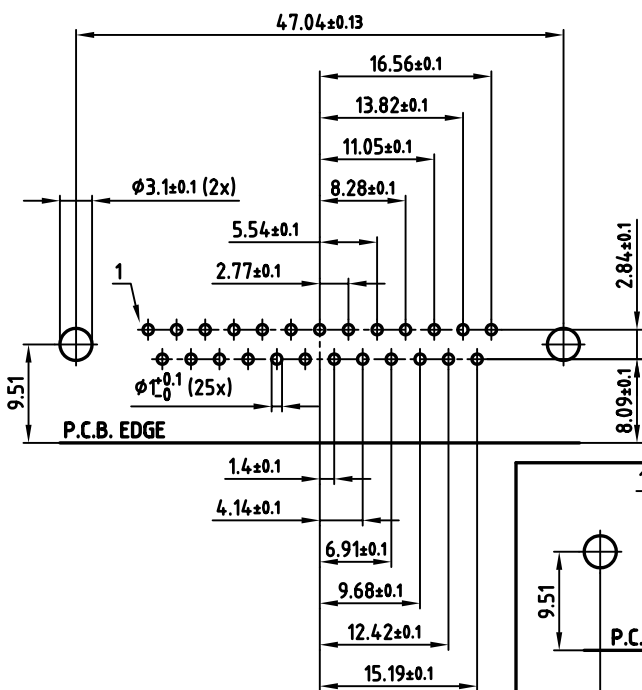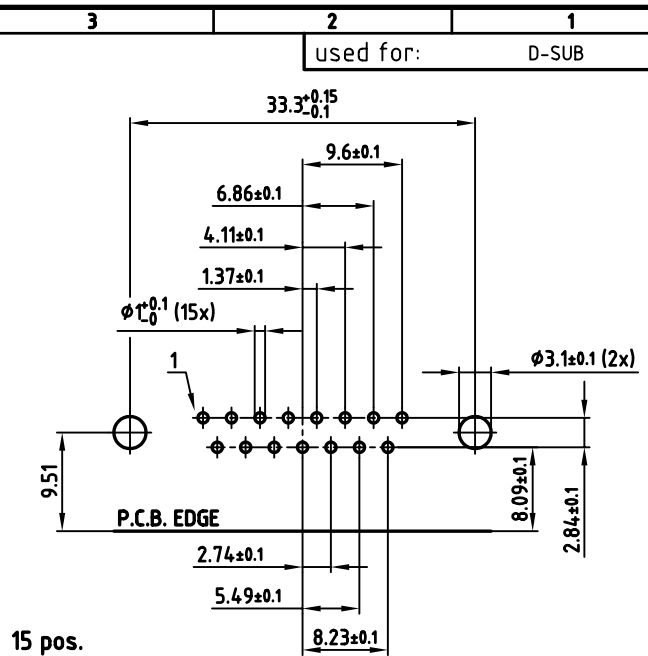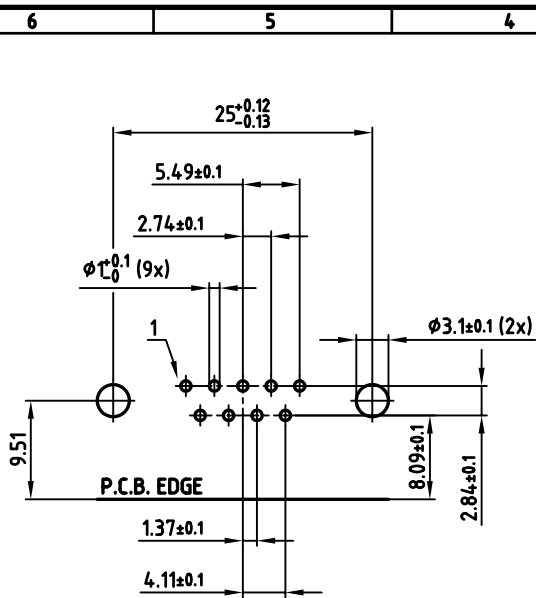

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	dim. in mm
2005	date
drawn	27.06. Lehmenkühler
appd.	27.06. Kühle
norm	DIN 41652
d-old	
CONEC®	

scale:	2:1
material:	SEE SHEET 1
title:	
P.C.B. HOLE DRILLINGS	
D-SUB MALE 90° 9-37pos. pin angled 0.318"	
stamped contacts - with threaded lock and clip	
dwg no:	AutoCAD 2004 DIN-A
16K1A1438	3
part no:	SEE SHEET 1
sh:2/2	