

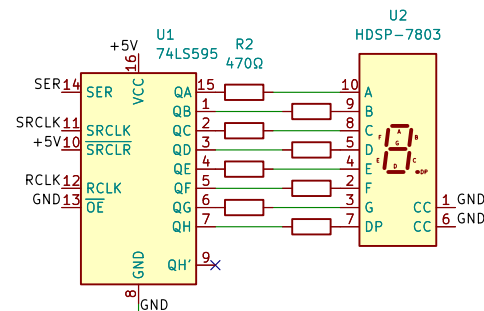



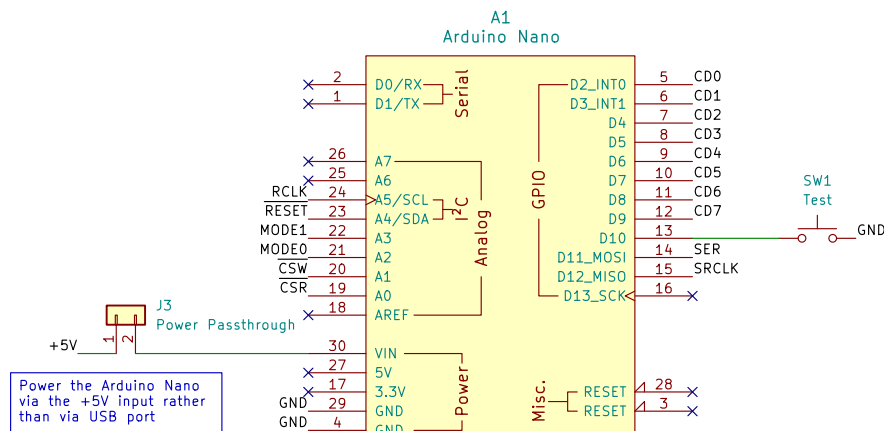

0 = V9938
1 = V9948
2 = V9958
3 = V9968
4 = V9978
E = error
- = no response

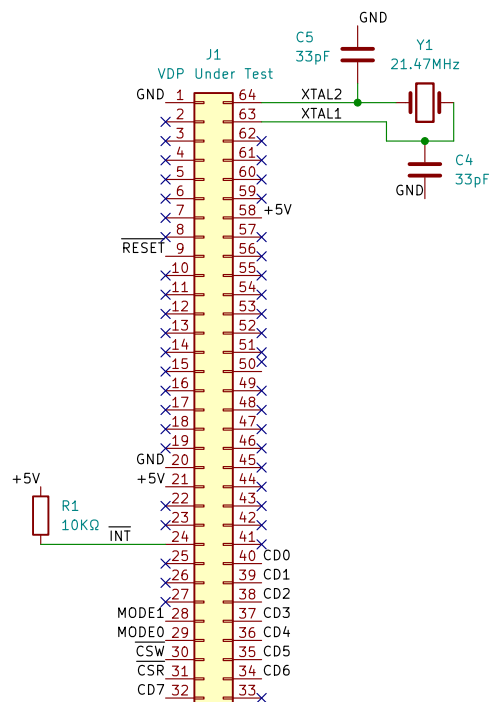

Power the Arduino Nano via the +5V input rather than via USB port

Brett Hallen

Sheet: /
File: MSX_VDP_Tester_Arduino.kicad_sch

Title: MSX VDP Tester

Size: A4 Date: 5/JUL/2026
KiCad E.D.A. 10.0.3

Rev: A
Id: 1/1