2 October 1973
SUPERSEDING
MIL-P-55200C(EL)
12 November 1970

MILITARY SPECIFICATION

POWER SUPPLY PP-2953( )/U

This specification is approved for use by all departments and agencies of the Department of Defense.

* 1. SCOPE

1.1 This specification covers one type of power supply designated Power Supply PP-2953( )/U for furnishing 0-10 amperes at 24.5 Vac from nominal 115/230 Vac, 50 or 60 Hz, single phase or 115 Vac 400 Hz, single phase.

* 2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

* SPECIFICATIONS

FEDERAL

T-T-871	Twine, Cotton, Wrapping
FF-B-575	Bolt, Hexagon and Square
FF-N-836	Nut Square, Hexagon, Cap, Slotted Casteliated Clinch, Knurled and Welding
FF-W-64	Washer, Lock (Spring)
FF-W-92	Washer, Metal, Flat (Plain)
NN-P-71	Pallets, Material Handling, Wood Double Faced, Stringer Construction

FSC 6130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

NN-P-530	Plywood, Container Grade
QQ-S-781	Steel, Strapping, Flat
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Box, Fiberboard
PPP-B-640	Box, Fiberboard, Corrugated, Triple-Wall
PPP-F-320	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes
PPP-P-291	Paperboard, Wrapping, Cushioning
PPP-S-760	Strapping, Nonmetallic (and Connectors)
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, Water Resistant (For Carton Sealing)
PPP-T-97	Tape, Pressure-Sensitive Adhesive, Filament Reinforced

MILITARY

MIL-P-116	Preservation-Packaging, Methods of
MIL-B-117	Bag and Sleeve, Interior Packaging
MIL-T-152	Treatment, Moisture and Fungus-Resistant of Communications, Electronic and Associated Electrical Equipment
MIL-S-901	Shock Tests, H.I. (High-Impact) Shipboard Machinery, Equipment and Systems, Requirements for (Navy)
MIL-P-11268	Parts, Materials, and Processes Used in Electronic Communication Equipment
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Signal Equipment
MIL-P-55110	Printed Wiring Boards

STANDARDS

MILITARY

MIL-STD-105	Sampling Proceaures and Tables for Inspection by Attributes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads (40 in. x 48 in. 4-Way Partial and 4-Way Pallets)
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-275	Printed Wiring for Electronic Equipment
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics Measurement of
MIL-STD-781	Reliability Tests Exponential Distribution
MIL-STD-785	Reliability Program Systems and Equipment
MIL-STD-810	Environmental Test Methods

DRAWINGS

ELECTRONICS COMMAND

SC-A-678009	Burn-in/Debugging Procedures for Power Supply PP-2953( )/U
SC-DL-450381	Power Supply PP-2953( )/U

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and number or symbol should be stipulated when requesting copies.)

3. REQUIREMENTS

3.1 First Article. - When specified in the contract or purchase order, the contractor shall furnish first articles in accordance with 4.3.

3.2 Construction. - The equipment shall be constructed in accordance with drawing SC-DL-450381.

3.3 Parts, materials, and processes; general. - In addition to the requirements of this specification, the requirements of Specification MIL-P-11268, including the selection requirements therein, shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3.4 Printed wiring boards. - Printed wiring boards used in the construction of printed wiring assemblies, shall be a product which has passed the requirements of Specification MIL-P-55110, Standard MIL-STD-275 and the master drawing.

3.4.1 Protective coating. - Printed wiring assemblies shall be conformally coated in accordance with the requirements of Military Specification MIL-P-11268.

3.5 Marking. - Marking shall conform to specification MIL-M-13231. Front panel marking shall be Group I as described in that specification and the applicable drawing.

3.5.1 Visibility. - Whenever practicable, parts and assemblies shall be so mounted that their identification markings shall be readily visible with a minimum disassembly of the equipment.

3.5.2 Serial numbers. - Each Power Supply PP-2953( )/U shall be serial numbered.

3.6 Finish, protective. - Equipment shall be given protective finish in accordance with Specification MIL-F-14072. This includes finish of hardware, such as hinges, screws, etc., and necessary touch up after mounting. The final paint film on Type I surfaces shall be green color (olive drab), semigloss enamel matching a color chip provided by the procuring agency. (See 6.6)

3.7 Electrical.

3.7.1 Operational. - The power supply shall meet the output requirements of 3.7.2 when tested in accordance with 4.7.1.

3.7.2 Input and Output voltages. - The power supply shall deliver an output voltage of 24.5 volts plus or minus ten (10) percent when tested in accordance with 4.7.2.

* 3.7.3 Ripple Voltage. - The ripple of the dc output voltage shall not exceed 0.12 Vac RMS when tested in accordance with 4.7.3.

* 3.7.4 Power changeover. - The power supply shall include an under voltage relay which shall automatically transfer the "OUTPUT" connector to receive power from the "DC INPUT" connector when the 115 Vac input is lost or varies to a low of 80 (plus 20, minus 0) Vac, or if the 230 Volt ac input is lost or varies to a low of 180 (± 20) Vac. These conditions shall be indicated by a light on the front panel

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

3.7.4 Power changeover. - (Cont'd) labeled "EMERGENCY DC ON" and extinguishing of the "AC ON" light. The dc power supply shall continue to deliver regulated power no lower than 19 volts at the minimum changeover voltages. The relay shall return the "OUTPUT" connector circuit to normal when the 115 Vac input is restored or rises to 100 (minus 20, plus 0) Vac, or if the 230 Vac input is restored or rises to 200 (minus 40, plus 0) Vac. The normal conditions shall be indicated by extinguishing of the "EMERGENCY DC ON" light and lighting of the "AC ON" light. The power supply shall conform to the above requirements when tested in accordance with 4.7.4.

3.7.4.1 Emergency DC continuity and polarity. - There shall be continuity and consistent polarity of the circuit connecting the "battery in" plug and the "power out" plug when tested in accordance with 4.7.4.1.

3.7.5 Overload protection. - The power supply shall be protected by circuit breakers, show no evidence of physical or electrical damage, and meet the requirements of paragraph 3.7.1, 3.7.2 and 3.7.3 when tested in accordance with 4.7.5.

3.7.6 Recovery time. - The power supply's output voltage shall recover to 24.5 Vdc plus or minus ten (10) percent within fifty (50) milliseconds, with a transient voltage no greater than thirty-four (34) Vdc when tested in accordance with 4.7.6.

3.8 Service Conditions. - The Power Supply PP-2953( )/U shall be constructed so that no fixed part shall become loose, cracked, flaked, pitted or blistered, no movable part or control shall be shifted in setting position or adjustment, and no permanent degradation shall be caused in performance below that specified in the following service conditions.

3.8.1 Continuous duty. - The power supply shall meet the requirements of the applicable portions of paragraphs 3.7.2 and 3.7.3 when tested in accordance with 4.8.1.

3.8.2 Orientation operating. - The power supply shall meet the requirements of 3.7.2 and 3.7.4 when tested in accordance with 4.8.2.

3.8.3 Leakage (immersion). - The power supply shall be subjected to the leakage test conditions specified and shall show no evidence of water leakage, when tested in accordance with 4.8.3.

3.8.4 Altitude. - The power supply shall be subjected to the altitudes specified and shall meet the electrical requirements of 3.7.2 and 3.7.3 at times specified when tested in accordance with 4.8.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

Phase Level Modulation. - A logic "one" shall be transmitted

3.8.5 Low temperature. - The power supply shall be subjected to the low temperature extremes of -50°F operating and -70°F storage and shall meet the electrical requirements of 3.7.2, 3.7.3 and 3.7.4 at times specified when tested in accordance with 4.8.5.

* 3.8.6 High temperature. - The power supply shall be subjected to the high temperature extremes of 160°F operating and 160°F storage and shall meet the electrical requirements of 3.7.2, 3.7.3 and 3.7.4 at times specified when tested in accordance with 4.8.6.

3.8.7 Humidity. - The power supply shall exhibit no physical damage of parts and materiel, such as corrosion, rust, blistering, swelling, deterioration, etc., or electrical degradation, and shall meet the electrical requirements of 3.7.2, 3.7.3, 3.7.4 and 3.7.7 at times specified, when tested in accordance with 4.8.7.

* 3.8.8 Vibration and vibration (bounce). - The equipment shall be free of damaging resonances at frequencies below 55 Hz and shall be capable of withstanding 10G shock input of a random nature for a period of three (3) hours. It shall conform to 3.7.2, 3.7.3 and 3.7.4 when tested to 4.8.8.

* 3.8.9 Electromagnetic Compatibility. - The power supply shall comply with the following conducted and radiated emission and susceptibility requirements of Table A-I-MIL-E-5530I of MIL-STD-461, Notice 4 when tested in accordance with 4.8.9:

(a) CE04 CS01 RE02 (b)(c) RS03
(a) CS02 (b) RE02.1

(a) The frequency range shall be from 150 KHz to 65 MHz

(b) The upper frequency limit shall be 10 GHz

(c) The radiated field strength shall be 1v/m

3.8.10 Shock (ballistic). - The power supply shall be subjected to the test specified in 4.8.10and shall show no evidence of physical damage, except minor surface abrasion. It shall meet the electrical requirements of 3.7.2, 3.7.3, and 3.7.4 when tested in accordance with 4.8.10.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

* 3.8.11 Fungus. - After the fungus test of 4.8.11, the power supply shall be visually examined, using a 10-power magnifier. The power supply shall show no more than six minute unrelated spots, each no greater than 0.015 square inch in area, of sparse microbial growth (6.11.3) as evidenced by growth colonization (6.11.2) which includes branching (6.11.1) and sporulation (6.11.4) on or within each cubic foot or fraction thereof of equipment assembly volume. Isolated instances of partial tubular germination (6.11.5) shall not be included in this evaluation. In addition, after testing in accordance with 4.8.11, the equipment shall meet the electrical requirements of 3.7.1.

3.8.12 Air seal. - The power supply shall contain facilities to enable performance of the specified air seal test. Under test, the power supply shall maintain its vacuum for at least one (1) minute within 0.01 pound when tested in accordance with 4.8.12.

3.9 Interchangeability. - Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable, without modification of such items or of the equipment. Individual items shall not be hand-picked for fit or performance. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc. (See 4.10)

* 3.10 Preconditioning. - The equipment shall be capable of meeting the requirements herein, without subsequent processing, after subjection to the preconditioning specified in 4.6.

3.11 Tropicalization. - Parts and assembled equipment shall be treated in accordance with Specification MIL-T-152. Prior to treatment, the supplier shall submit for approval to the Government, a detailed statement of treatment as required by Section 3 of MIL-T-152. (See 6.2(i))

3.12 Technical literature, tools, and running spare parts. - Technical literature, tools and running spare parts shall be furnished as specified by the contract. Running spare parts shall be identical to corresponding parts in the equipment furnished on order. (See 6.2(g) and 6.2(h)).

* 3.13 Reliability. - The reliability of the PP-2953( )/U Power Supply equipments shall provide a specified-mean-time-between failures (θ_o) of 4500 hours. The contractor shall conduct the following tasks in accordance with MIL-STD-781 and MIL-STD-785:

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

3.13 Reliability. - (Cont'd)

Periodic Reports
Reliability Demonstration
Failure Data Collection and Analysis
Test Plans

The reliability of the PP-2953( )/U shall be demonstrated in accordance with 4.13 of this specification.

* 3.14 Workmanship. - The equipment shall be manufactured and assembled in accordance with requirement 9 of MIL-STD-454 and the applicable portions of the following paragraphs:

(a) In Specification MIL-P-11268:

(1) General requirements for plastic material and plastic parts.
(2) Wiring and cabling, including: Slack, protection, clearance, splicing, connections in general, grounding, shielding on wire and cable.
(3) Flux and cleaning agents for solder.
(4) Process for solder.
(5) Cleaning.
(6) Riveting.
(7) General requirements for securing of parts.
(8) Welding.
(9) Tropicalization.
(10) Mechanical operation of controls.
(11) Self-tapping screws.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the contractor may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the contract and specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

* 4.2 Classification of inspection. - Inspection shall be classified as follows:

(a) First article inspection (Does not include preparation for delivery). (See 4.3)

(b) Inspection covered by subsidiary documents. (See 4.4)

(c) Quality conformance inspection.

(1) Quality conformance inspection of equipment before preparation for delivery. (See 4.5)

(2) Quality conformance inspection of preparation for delivery. (See 4.11)

* 4.3 First Article. - Unless otherwise specified in the contract or purchase order, the first article inspection shall be performed by the contractor.

* 4.3.1 First Article units. - The contractor shall furnish four (4) first article units of the complete PP-2953( )/U Power Supply.

* 4.3.2 First Article Inspection. - The first article inspection shall consist of the inspection specified in Table I, and shall be performed in the order specified.

* 4.3.3 First article data. - The first article test plan and test report(s) shall be as required in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

TABLE I FIRST ARTICLE INSPECTION

INSPECTIONS	REQT. PARA.	TEST PARA.	UNIT 1	UNIT 2	UNIT 3	UNIT 4
1. Inspections covered by subsidiary documents		4.4	Inspections to be performed on all units.			
2. Preconditioning	3.10	4.6	Inspections to be performed on all units.			
3. Group A Inspection	See Table II		Inspections to be performed on all units.			
4. Group B Inspection	See Table III		Inspections to be performed on all units.			
5. Environmental						
Continuous Duty	3.8.1	4.8.1	1			
Orientation, Operating	3.8.2	4.8.2	2			
Leakage (Immersion)	3.8.3	4.8.3	3			
Altitude	3.8.4	4.8.4	4			
Low Temperature	3.8.5	4.8.5		1		
High Temperature	3.8.6	4.8.6		2		
Humidity	3.8.7	4.8.7		3		
Vibration & Vibration (Bounce)	3.8.8	4.8.8		4		
Electromagnetic Compatibility	3.8.9	4.8.9			1	
Shock (Ballistic)	3.8.10	4.8.10			2	
Fungus	3.8.11	4.8.11				1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

* 4.4 Inspections covered by subsidiary documents. - The following shall be inspected under the applicable subsidiary documents as part of the inspection required by this specification, and the inspection requirement specified in the contract or purchase order.

Item	Where required
Parts, Materials and Processes, General	3.3
Printed Wiring Boards	3.4
Marking	3.5
Finish, Protective	3.6
Tropicalization	3.11

* 4.5 Quality conformance inspection of equipment before preparation for delivery. - The contractor shall perform the inspections specified in 4.4, 4.5 and 4.5.1 through 4.5.5. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with specification requirements.

4.5.1 Group A inspection. - Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in Table II. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels, and AQL's indicated in Table II.

* 4.5.1.1 Order of inspection within Group A. - Group A inspection shall be performed in an order satisfactory to the Government, except that the operational in 4.7.1 shall be last and the air seal in 4.8.12 shall be next to last.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

TABLE II GROUP A INSPECTION

Inspection	Reqmt. Para.	Test Para.	AQL Major	AQL Minor
Visual & Mechanical	3.14	4.9	1.5 dphu*	6.5 dphu
Electrical				
Input & Output voltage	3.7.2	4.7.2)		
Ripple voltage	3.7.3	4.7.3)	1.5 dphu	**
Power changeover	3.7.4	4.7.4)	for the	
Emergency ac continuity & polarity	3.7.4.1	4.7.4.1)	group	
Air seal	3.8.12	4.8.12	1.0%	***
Operational	3.7.1	4.7.1	1.0%	**

* Defects per hundred units.
** All electrical tests are major.
*** This environmental test is major.

* 4.5.2 Group B inspection. - Group B inspection shall normally be performed on inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection. This inspection shall conform to Table III and to the special inspection levels of Table I of MIL-STD-105.

* 4.5.2.1 Group B Sampling Plans. - The Group B sampling plans, for the AQL's listed in Table III, shall be as follows:

AQL	INSPECTION LEVEL
4.0 dphu	S-4
6.5 dphu	S-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

4.5.2.2 Order of inspection within Group B. - Group B inspection shall be performed in an order satisfactory to the Government.

TABLE III GROUP B INSPECTION

Inspection	Requirement Para.	Test Para.	AQL
Interchangeability	3.9	4.10	6.5 dphu
Overload protection	3.7.5	4.7.5	4.0 dphu
Recovery time	3.7.6	4.7.6	4.0 dphu

4.5.3 Group C inspection. - Group C inspection shall be performed on units that have passed group A and group B inspection. The inspection shall consist of the inspections specified in Table IV. Samples shall be selected in accordance with 4.5.3.1.

4.5.3.1 Sampling for Group C inspection.

4.5.3.1.1 Subgroup 1 - Table I. - Two (2) samples shall be selected at random, from each 200 equipments produced, and subjected to each test specified. The first samples shall be selected at the start of the contract from the first quality conformance inspection production lot.

4.5.3.1.2 Subgroup 2 - Table IV. - One (1) sample shall be selected at random, from each 50 equipments produced, and subjected to each test specified. The first sample shall be selected at the start of the contract from the first quality conformance inspection production lot.

4.5.3.1.3 Subgroup 3 - Table I. - One (1) sample shall be selected at random, from each 400 equipments produced, and subjected to each test specified in the order shown. The first sample shall be selected at the start of the contract from the first quality conformance inspection production lot.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

* 4.5.3.1.4 Subgroup 4 - Table IV. - Subgroup 4 tests are only required at the start of the contract, on (two (2) randomly selected samples, of the complete equipments) from the first quality conformance inspection production lot. The samples shall be subjected to the tests specified in the order shown. Sample number one (1) to tests 4.8.9 and 4.8.10 and sample number two (2) to test 4.8.11. No subsequent tests for Subgroup 4 will be required, provided no evidence or indications of quality degradation exists for these specified requirements, in the production units.

* 4.5.3.2 Order of Inspection within Group C. - Group C inspection shall be performed in an order which is satisfactory to the government.

* 4.5.3.3 Group C Failures. - Actions required relative to Group C failures shall be as specified in the contract or purchase order. (See 6.5)

* 4.5.4 Reinspection of conforming Group C sample units. - Unless otherwise specified, sample units which have been subjected to and passed Group C inspection may be accepted on the contract or order provided all damage is repaired and the sample units are resubjected to and pass Group B and A inspection, in that order.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

TABLE IV - GROUP C INSPECTION

INSPECTION	REQ. PARA.	TEST PARA.
Subgroup 1		
Continuous duty	3.8.1	4.8.1
Orientation, operating	3.8.2	4.8.2
Subgroup 2		
Leakage (Immersion)	3.8.3	4.8.3
Altitude	3.8.4	4.8.4
Subgroup 3		
Low temperature	3.8.5	4.8.5
High temperature	3.8.6	4.8.6
Humidity	3.8.7	4.8.7
Vibration and vibration (bounce)	3.8.8	4.8.8
Subgroup 4		
Electromagnetic Compatibility	3.8.9	4.8.9
Shock (Ballistic)	3.8.10	4.8.10
Fungus	3.8.11	4.8.11

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

* 4.5.5 Group D Inspection. - This inspection shall consist of the tests specified in Table V and shall be performed on units from lots which have been subjected to and met Group A and Group B inspection.

4.5.5.1 Sampling for Group D Inspection. - Samples shall be selected in accordance with paragraph 4.13:

TABLE V GROUP D INSPECTION

INSPECTION	REQT. PARA.	TEST PARA.
Reliability	3.13	4.13

4.5.5.2 Group D failure. - Actions required relative to group D failure shall be as specified in 4.13.4 of this specification.

4.6 Preconditioning. - Each unit of each lot shall be subjected to a burn-in debugging period, in accordance with SC-A-678009. (See 3.10)

4.7 Electrical. - The following test equipment, to be contractor furnished, shall be used in performing the electrical tests specified herein.

(a) Electronic voltmeter, Ballantine Model 300 or equal.

(b) Oscilloscope Tektronix Type 310A, or equal.

(c) Variable power supply Invertron Model 7518 or equal.

(d) Vacuum Chamber and Accessories, Evey Eng. Co., or equal.

(e) D.C. Voltmeter, 0-30 volt, Simpson, or equal.

(f) D.C. Ammeter 0-25 Amp, Simpson, or equal.

(g) A.C. Voltmeter 0-300 Volt, Simpson, or equal.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

4.7.1 Operational. - Operate the power supply from a 115 Vac, 60 Hz supply at no load (0 amperes) and full load (10 amperes) for five (5) minutes under each load condition. At the end of each five (5) minute period, measure and record the power supply's output voltages. (See 3.7.1) The measurements must meet the applicable tolerances specified in paragraph 3.7.2 for these voltage parameters.

4.7.2 Input and Output Voltages. - The power supply's output voltages shall meet the requirements of 3.7.2 when its loads, input voltages, and frequencies are varied as specified below:

Input Vac (± 10%)	Frequency Hz (± 5%)	Load Amps	Tolerance Vdc
103.5	47.5, 63, 420	0, 2, 10	22.05-26.95
115	47.5, 63, 420	0, 2, 10	22.05-26.95
126.5	47.5, 63, 420	0, 2, 10	22.05-26.95
207	47.5, 63	0, 2, 10	22.05-26.95
230	47.5, 63	0, 2, 10	22.05-26.95
253	47.5, 63	0, 2, 10	22.05-26.95

4.7.3 Ripple Voltage. - The power supply's ripple voltages shall meet the requirements of 3.7.3 under full load, and when its input voltages are varied as specified below:

Input Vac (± 10%)	Freqency Hz (± 5%)	Full Load Amps	Tolerance Vac
103.5	57-63	10	0.12
115	57-63	10	0.12
126.5	57-63	10	0.12

The ripple voltages shall be measured with an electronic voltmeter, Ballantine Model 300 or equal.

4.7.4 Power changeover. - Set-up the power supply for operating with a load current of two (2) amperes. Using a 115 Vac, 60 Hz single phase variable supply, alternately decrease and increase the ac input voltage until the power supply automatically changes over to dc and then reverses to ac. Note and record these ac input voltage values at both changeover points, and that the proper ON, OFF lighting sequences are indicated. In addition, note and record the power supply's regulated output voltage, at the minimum changeover voltage point. Repeat these procedures using 115 Vac, 400 Hz and 230 Vac 60 Hz inputs.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

4.7.4 Power changeover. - (Cont'd) Set-up the power supply for operating with a full load current of ten (10) amperes. Repeat all the above procedures for each input voltage and frequency specified above. The power supply when tested accordingly shall meet the requirements of 3.7.4.

* 4.7.4.1 Emergency Dc continuity and polarity. - Using suitable instrumentation check for continuity and consistent polarity of the circuit connecting the "battery in" plug and the "power out" plug. This test shall be performed under the power changeover condition, indicated when the light on the power supply's front panel labeled "Emergency Dc On" is lit. The continuity and polarity shall conform to 3.7.4.1.

4.7.5 Overload protection. - With the power supply operating into a resistive load and supplying 24.5 Vdc at 10 amperes output current, the load resistor shall be decreased gradually (increasing output current). The DC output circuit breaker shall trip before a maximum output current of 16 amperes is applied. After the DC output circuit breaker trips, the load resistor shall be increased, reducing the output current to 10 amperes or less and the DC output circuit breaker reset. After adjusting the power supply for full load operation (24.5 Vdc @ 10 amperes), the output shall be shorted. The DC output circuit breaker shall trip. Upon removal of the short circuit, and resetting of the circuit breaker, the power supply shall still be operative, and meet the requirements of paragraphs 3.7.1, 3.7.2 and 3.7.3. With the power supply adjusted for 24.5 Vdc output, place the DC output circuit breaker in the "off" position, short the output, with the output shorted place the DC output circuit breaker in the "on" position, the circuit breaker shall trip. After removal of the short circuit, and resetting the circuit breaker, the power supply shall still be operative and meet the requirements of paragraphs 3.7.1, 3.7.2 and 3.7.3. With the power supply adjusted to 24.5 Vdc output, place both the AC input and DC output circuit breakers in the "off" position, short the output, place the DC output circuit breaker in the "on" position, place the AC input circuit breaker in the "on" position, the DC output circuit breaker shall trip. After removal of the short circuit, and resetting the circuit breaker, the power supply shall still be operative and meet the requirements of paragraphs 3.7.1, 3.7.2 and 3.7.3. The input voltage for the aforementioned tests shall be 115 Vac, RMS, 60 Hz. Repeat the above tests five (5) times. Visual examination shall be made for any physical damage that might have occurred due to the overload conditions. (See 3.7.5.)

4.7.6 Recovery time. - Operate the power supply from a 115 Vac, 60 Hz supply. Switch the load from ten (10) amperes to two (2) amperes and record the recovery time and maximum voltage transient on a calibrated oscilloscope connected to the power supply's ac output voltage. Repeat the same procedure and record the recovery time and maximum voltage transient when the load is switched from two (2) amperes to ten (10) amperes. The recovery times and voltage transients shall meet the requirements of 3.7.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.8 Service conditions. - The Power Supply PP-2953( )/U shall be tested in accordance with the following service conditions.

4.8.1 Continuous duty. - Operate the power supply at full load ten (10) amps continuously for seventy-two (72) hours, from a 115 Vac, 60 Hz source. Perform the tests specified in paragraphs 4.7.2 and 4.7.3. Repeat the above procedures utilizing a 115 Vac, 400 Hz power source and re-perform the same specified tests. The power supply when tested accordingly shall meet the requirements of 3.8.1.

4.8.2 Orientation, operating. - The power supply, operating, shall be inclined for a minimum of five (5) minutes in each of four (4) planes, (forward, backward, left and right) to an angle of twenty (20), plus (3) minus (1) degrees. After each five (5) minute interval for each of the four (4) inclinations, perform the tests specified in 4.7.2 and 4.7.4 at 115 Vac, 60 Hz, ten (10) amperes load. The power supply shall meet the requirements of 3.8.2.

4.8.3 Leakage (immersion). - The power supply, in its normal field transport configuration with its front cover closed, shall be subjected to the leakage tests specified in procedure I, Method 512 of MIL-STD-810, and shall meet the requirements of 3.8.3.

4.8.4 Altitude. - The power supply in its normal configuration shall be subjected to the altitude test specified in Procedure I, Method 500 of MIL-STD-810, with altitude in Step 3 held for 1 hour, and shall meet the requirements of 3.8.4.

4.8.5 Low temperature. - The power supply in its normal operating configuration shall be subjected to the low temperature test specified in Procedure I, Method 502 of MIL-STD-810, with temperatures in Step 2 held for 24 hours and Step 4 held for 6 hours, and shall meet the requirements of 3.8.5.

4.8.6 High temperature. - The equipment in its normal operating configuration shall be subjected to the test of Method 501, Procedure II, of Standard MIL-STD-810, with temperature in Step 5 held for 4 hours. For Step 4, adjust the chamber temperature to 160°F. For Step 7 the chamber shall be adjusted to 160°F for test item operation (this includes effects of solar radiation), and shall meet the requirements of 3.8.6.

4.8.7 Humidity. - The power supply in its normal operating configuration, with its front cover opened shall be subjected to the humidity test specified in Procedure II, Method 507, of MIL-STD-810, and shall meet the requirements of 3.8.7 when tested between the 24th and 28th hours and between the 44th and 48th hours of each cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.8.8 Vibration and vibration (bounce). - The power supply shall be subjected to the vibrations and conditions in Procedure IX Parts 1 and 2, Method 514 of MIL-STD-810, and shall meet the requirements of 3.8.8.

* 4.8.9 Electromagnetic Compatibility. - Operate the power supply from a 115 VAC, 60 Hz single phase source with ten (10) amperes load. For test methods CE04 and CS02 use procedure B, LISN Method. Utilizing all the applicable test set-up and procedures in accordance with MIL-STD-462 and the Government approved test plan all the specified tests shall be performed. The power supply shall meet the requirements of 3.8.9.

4.8.10 Shock (Ballistic). - This test shall be conducted on "Shock Testing Machine" for Light Weight Equipment as shown in Figure 1 of Specification MIL-S-901. The power supply including shock mounts (if any), shall be secured in its normal operating position to the steel test plate by means of the same fasteners used for vehicular installation of the equipment. Subject the power supply to a total of 9 blows: one each, 1-foot blow, 3-foot blow and 5-foot blow on the back, side and top of the test plate. As an alternative to reorienting, the test plate for the blows on the side of the plate, equivalent rotation of the power supply under test is permissible. After each set of three (3) blows the equipment will be energized to determine that it is still operable before proceeding to the next set of blows. At the completion of the 9 blows the power supply shall be tested and meet the requirements of 3.8.10.

* 4.8.11 Fungus. - The power supply shall be subjected to the fungus test specified in Method 508, Procedure 1, of MIL-STD-810. There shall be abundant growth colonization(6.11)on 50 percent or more of the area of the control item after 14 and 28 days. No cleaning of the power supply is permitted for 72 hours prior to the fungus test. Inability of the power supply to meet the reauirements of 3.8.11 shall constitute failure of this test. Handling, prior, during and after the test procedures shall be accomplished without contamination of equipment.

4.8.12 Air Seal. - Remove and replace the power supply's covers in such a manner as to break and remake the seals. Immediately thereafter, subject the power supply as field transported to a vacuum of one (1) pound per square inch (one (1) per square inch less than the atmospheric pressure surrounding the power supply) applied to the interior of the power supply's inclosure. Valve-off the vacuum, and after one (1) minute measure and record the interior pressure. The decrease in vacuum shall be within the limits specified in 3.8.12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.9 Visual and mechanical inspection. - The power supply shall be examined for defects listed in MIL-STD-252.

4.10 Interchangeability. - The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirements of 3.9. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

(a) External and internal dimensions of cases, covers, and insertable subassemblies and replaceable parts, when such dimensions affect mating of parts.

(b) Internal dimensions of cavities in cases and assemblies, when such dimensions affect acceptability of insertable subassemblies.

(c) Location of fasteners on separate parts or assemblies which must mate together such as cases, covers, and mountings.

4.11 Quality conformance inspection of preparation for delivery. - Preparation for delivery shall be inspected in accordance with Specification MIL-P-116 to determine conformance to the requirements of Section 5.

4.12 Rough handling test (preparation for delivery). - When the rough handling test in accordance with Specification MIL-P-116 is required by contract (see 6.2(d)(2)) the following operational test shall be conducted to determine freedom from malfunction caused by the rough handling:

Req. Para.	Test Para.
3.7.1	4.7.1

4.13 Production Reliability Sampling Tests. - The contractor shall conduct production reliability sampling tests on a minimum of ten (10) units randomly selected from each production lot. A production lot for these tests shall be defined as two months' production. Units must have successfully completed burn-in/debugging and Group A tests prior to conducting reliability testing. Each production reliability sampling test shall use the accept/reject criteria of 4.13.3. Minimum test time per equipment shall be in accordance with 4.2.2.4 of MIL-STD-781.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

4.13.1 Test Conditions. - The test environment shall be Test Level B of MIL-STD-781, except input voltage cycling shall be as follows: 120 volts 1/3 of equipment on time; 115 (nominal) volts 1/3 of equipment on time and 112 volts 1/3 of equipment on time. Each equipment shall operate under 10 amp load. Measurements of output voltage shall be made at least once every 24 hours. Measurements during vibration shall not be avoided. Proper instrumentation shall be provided to detect failures. Failures shall be corrected. Paragraphs 5.5 through 5.10 inclusive, of MIL-STD-781, shall apply.

4.13.2 Failure Definition. - A failure is defined as equipment inability to perform its required function; this includes catastrophic as well as any event which causes departure from performance, as defined by this specification or the contractor's approved test procedures.

4.13.3 Accept/Reject Criteria. - The accept/reject criteria shall be that of Test Plan IVA of MIL-STD-781.

4.13.4 Corrective Action. - Corrective action shall be in accordance with MIL-STD-781. In addition, the supplier shall immediately investigate and report details of the proposed corrective action on all units of product which were manufactured under the same conditions, and which the Government considers subject to the same failure.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be level A or C, as specified. (See 6.2)

5.1.1 Level A.

5.1.1.1 Cleaning. - Power Supply PP-2953( )/U shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. - Power Supply PP-2953( )/U shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application. - None required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

5.1.1.4 Unit packaging. - Each Power Supply PP-2953( )/U shall be packaged in accordance with items 1 through 8 of Table VI and Figure 1.

5.1.2 Level C. - Power Supply PP-2953( )/U shall be preserved and packaged in a manner that will afford adequate protection against physical and environmental damage during shipment, handling and limited intransit storage.

5.2 Packing. - Packing shall be level A, B or C as specified. Shipping containers for all levels shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents. (See 6.2)

5.2.1 Level A.

5.2.1.1 Palletized load. - A quantity of Power Supply PP-2953( )/U, packaged as specified in 5.1, shall be placed on a pallet, load type I, conforming to MIL-STD-147 except that the PALLET shall be softwood, conforming to NN-P-71, type IV, size 2. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s, of W3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, Type I, finish A, or shrink film.

5.2.1.2 Less than palletized load. - When quantities per destination are less than a pallet load, the item packaged as specified in 5.1, shall be waterproofed, with tape conforming to PPP-T-76 in accordance with the taping requirements of the appendix of the box specification. A quantity of the waterproofed containers shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A.

5.2.2 Level B.

5.2.2.1 Palletized load. - A quantity of Power Supply PP-2953( )/U, packaged as specified in 5.1, shall be palletized as specified in 5.2.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

5.2.2.2 Less than palletized load. - When quantities per destination are less than a pallet load, a quantity of Power Supply PP-2953( )/U, packaged as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather-resistant, variety DW. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, type IV. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97, type IV and PPP-S-760, type II, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification.

5.2.3 Level C.

5.2.3.1 Palletized load. - A quantity of Power Supply PP-2953( )/U, packaged as specified in 5.1, shall be palletized as specified in 5.2.1.1 except that the fiberboard caps shall be class domestic.

5.2.3.2 Less than palletized load. - When quantities per destination are less than a pallet load, a quantity of Power Supply PP-2953( )/U, packaged as specified in 5.1, shall be packed as specified in 5.2.2.2, except that the fiberboard boxes shall conform to PPP-B-640 and PPP-B-636, class 1 and class domestic, respectively, and reinforcing shall not be required for boxes conforming to PPP-B-636.

5.3 Marking. - In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

BILL OF MATERIAL
TABLE VI

REF No.	ITEM Nomenclature	No. Reqd.	Method MIL-P-116	SIZE - INCHES L	W	D	REQUIREMENT Spec No.	T	C	V	G	F	S
1	Technical Literature	2	IC-1	10-1/4	7-3/4								
	Bag	2		12	9		MIL-B-117	II	C				
2	Power Supply PP-2953()/U	1	III	14-1/2	14-1/2	6-1/2	(Bare Wt. 46 LBS.)						
3	Pad, Top and Bottom	2		15-1/2	15-1/4	3/8	PPP-F-320	CF	WR	SW	W5c		
4	Sleeve	1		14-1/4	14-1/4	7	PPP-F-320	CF	WR	SW	W5c		
5	Plywood	1		15-3/4	16	5/8	NN-P-530	III					
6	Bolt	4				3/8	FF-B-575	II					
	Washer, Flat	8				ID 3/8	FF-W-92	A			1		
	Lockwasher	4				ID 3/8	FF-W-84		B				
	Nut	4				ID 3/8	FF-N-836	II					
7	Cable Assemblies CX-4524/U and CX-4721/U	1 1	III III	WIND EACH CABLE ASSEMBLY INTO A COIL OF PROPORTIONATE DIMENSIONS AND SECURE WITH TWINE CONFORMING TO T-T-871, TYPE II, IN THREE EQUIDISTANT TIES WHICH SHALL INCLUDE THE TERMINATIONS WITHIN THE TYE OF THE COIL. WRAP COILED CABLE ASSEMBLIES WITH PAPERBOARD CONFORMING TO PPP-P-291, TYPE I, AND SECURE WITH TAPE CONFORMING TO PPP-T-45, TYPE III.							
8	Box, Fiberboard	1		15-3/4	16	9	PPP-B-636	CF	WR	SW	W5c		

T - Type, V - Variety, F - Flute
C - Class, G - Grade, S - Style

AMSEL-MR F Form 3135
1 Oct 1965

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the current version before use.

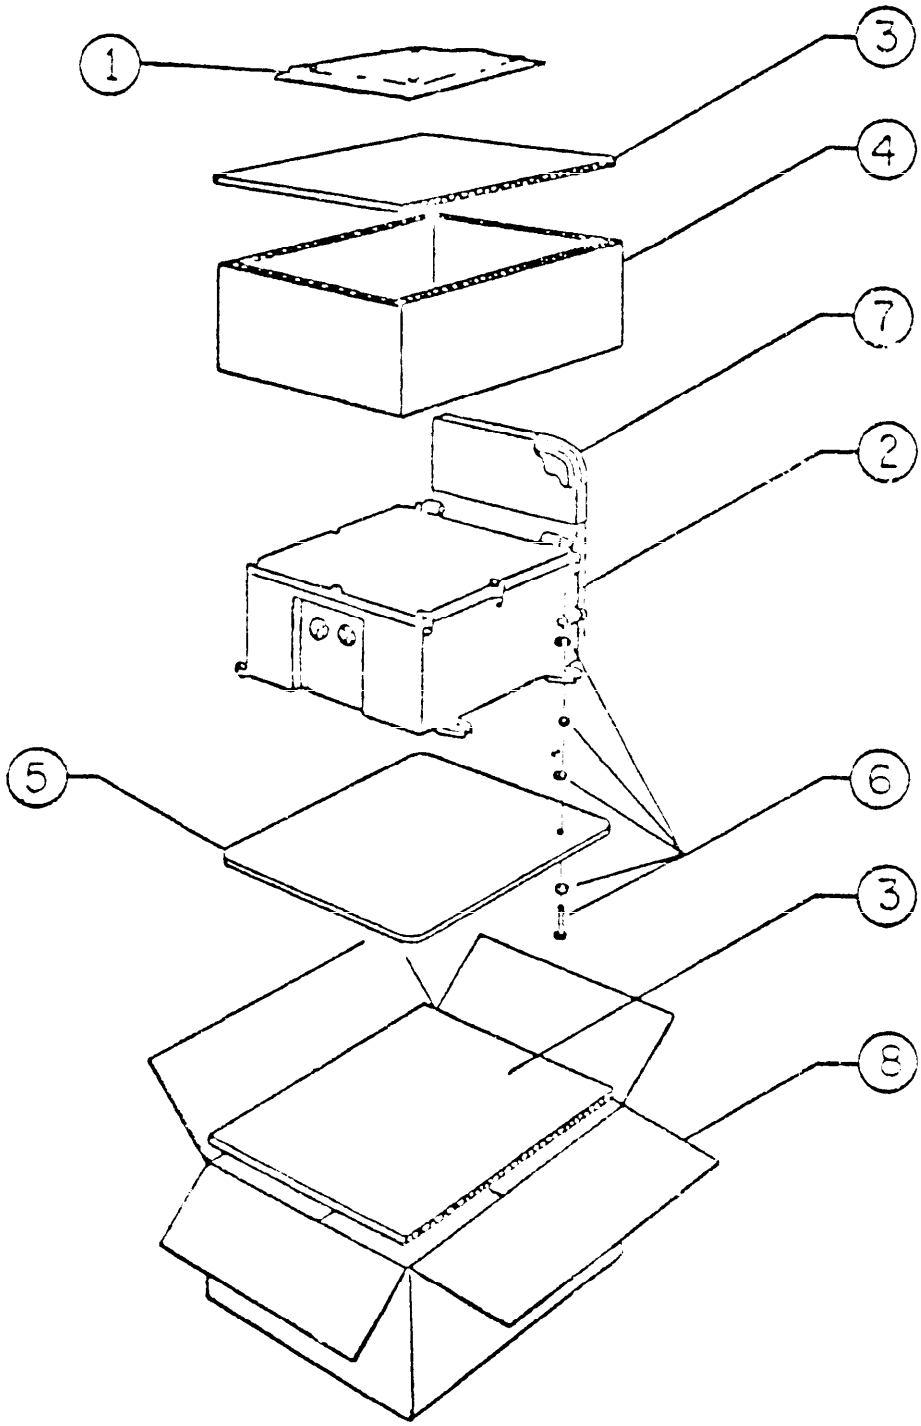


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended Use. - Power Supply PP-2953( )/U is intended to provide DC power for operation of Receiver-Transmitter RT-246( )/VRC-12 or RT-524( )/VRC-12 from a 115/230 volt, 50 or 60 Hz, single phase ac power source; or from a 115 volt, 400 Hz, single phase ac power source.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification and any amendment thereto.

(b) Levels of Preservations and packaging and packing (See section 5).

(c) When rough handling and functional test are required.

(d) First Article inspection:

(1) Four sample units of each item cited in section I are required, so that lengthy environmental tests can be performed on different samples in order to expedite the total required testing. (See 3.1)

(2) Preproduction pack(s) as follows:

Makeup of pack(s).

Number of each kind of pack to be submitted.

Inspection to be performed thereon. (See 4.12)

(e) Marking and shipping of samples.

(f) Place of final inspection.

(g) Technical literature required (See 3.12).

(h) Quantity of tools and running spare parts required. (See 3.12)

(i) Submission of the statement of treatment covering tropicalization of material as soon as possible after award of contract. This statement should be submitted to the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:14Z
Check the source to verify that this is the currentversion before use.

6.3 Nomenclature. - The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: PP-2953W/U. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.4 Verification inspection. - Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

6.5 Group C inspection. - Approval to ship may be withheld, at the discretion of the Government, pending the decision from the contracting officer on the adequacy of the corrective action. (See 4.5.3.3)

6.6 Color. - The color chip furnished by the procuring agency (3.6) will match color chip no. X-24087 and may be obtained upon request to Commanding General, Coating and Chemical Laboratory, Aberdeen Proving Ground, Maryland.

6.7 Location of operational inspection and air-seal test. - It is desirable that the operational inspection (4.7.1) and the air-seal test (4.8.12) be performed at a location that will minimize handling (which might cause damage to the equipment) after this inspection is completed. Any preparation for shipment which would require breaking of the equipment seal should be accomplished prior to the air-seal test so that the seal may remain intact thereafter. It is recommended that the entire lot (including all previously inspected sample units) be sampled and inspected immediately prior to packaging.

* 6.8 Dimensional Data. - Dimensions of packaging materials in the Bill of Material Table are based on the dimensions of the equipment cited in the table. When the dimension of the equipment vary from those cited, the dimensions of the packaging materials shall be adjusted accordingly.

* 6.9 Deviations. - Request for deviations in packaging and packing design shall be supported by test data proving the ability of the equipment, packaged and packed in accordance with the proposed design change, to withstand the applicable tests for the selected method, including the rough handling tests in accordance with MIL-P-116. Deviation approval shall be contingent on availability of packaging and packing materials selected and economies realized. (See Section 5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

* 6.10 Qualitative Material Requirements. - The following service conditions were considered in the design of the equipment and are given here as a guide for the contractor where he is required to make a selection of parts, materials, processes, construction methods, etc.

6.10.1 Orientation, non-operating. - The power supply, non-operating shall be stored in any position for a two (2) year period. After storage the power supply shall be tested, operating as described in 4.8.2 and shall meet the requirements of 3.8.2.

* 6.11 Definitions.

6.11.1 Branching. - Branching is a connected arrangement of filaments (hyphae) formed by shoots or secondary stems growing from the main stem or filament (hypha).

6.11.2 Growth colonization. - Growth colonization is a mass of individual plants, generally of one species, living together; or a group of hyphae which is formed from one spore or cell and may be one indiviaual plant. Colonization which completely covers the surface of the nutrient material constitutes abundent growth.

6.11.3 Microbial growth. - Microbial growth is the growth of very minute organisms. Such organisms when present in large numbers may provide a colony visible to the naked eye.

6.11.4 Sporulation. - Sporulation is the formulation of minute unicellular reproductive or dormant bodies, called spores.

6.11.5 Tubular germination. - Tubular germination is partial growth by the production of hyphae, which are tubular shaped fungal filaments. Tubular germination constitutes restricted individual spore growth not proceeding to colonization.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

CUSTODIAN:

ARMY-EL

Preparing activity:

ARMY-EL

Project Nr. 6130-A132

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced documents or to amend contractual requirements.

SPECIFICATION: MIL-P-55200D(EL) POWER SUPPLY PP-2953( )/U

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers attach to form and place both in an envelope addressed to preparing activity.)

5. SUBMITTED BY (Printed or typed name and activity) | DATE

DD FORM 1426 REPLACES DD FORM 1426, 1 JAN 66, WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.

AS CONTROL FRAMES.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- RD-ED
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:14Z
Check the source to verify that this is the current version before use.