

RISC-V XBitmanip Extension
Document Version 0.34-draft

Editor: Clifford Wolf
Symbiotic GmbH
`clifford@symbioticeda.com`
April 14, 2018

Contributors to all versions of the spec in alphabetical order (please contact editors to suggest corrections): Steven Braeger, Rex McCrary, Po-wei Huang, and Clifford Wolf.

This document is released under a Creative Commons Attribution 4.0 International License.

Contents

| | | |
|----------|--|-----------|
| 1 | Introduction | 1 |
| 1.1 | ISA Extension Proposal Design Criteria | 1 |
| 1.2 | B Extension Adoption Strategy | 2 |
| 1.3 | Next steps | 2 |
| 2 | RISC-V XBitmanip Extension | 3 |
| 2.1 | Count Leading Zeros (<code>clz</code>) | 3 |
| 2.2 | Count Bits Set (<code>pcnt</code>) | 4 |
| 2.3 | Generalized Reverse (<code>grev</code> , <code>grevi</code>) | 4 |
| 2.4 | Shift Ones (Left/Right) (<code>slo</code> , <code>sloi</code> , <code>sro</code> , <code>sroi</code>) | 5 |
| 2.5 | Rotate (Left/Right) (<code>rol</code> , <code>ror</code> , <code>rori</code>) | 7 |
| 2.6 | And-with-complement (<code>andc</code>) | 8 |
| 2.7 | Bit Extract/Deposit (<code>bext</code> , <code>bdep</code>) | 9 |
| 2.8 | Compressed instructions (<code>c.not</code> , <code>c.neg</code> , <code>c.clz</code> , <code>c.brev</code>) | 10 |
| 3 | Alternatives to <code>bext</code> and <code>bdep</code> | 11 |
| 3.1 | Generalized Reverse Masked (<code>grevm0</code> , <code>grevm1</code> , ...) | 12 |
| 3.2 | Bit Shuffle (<code>zip</code> , <code>unzip</code>) | 13 |
| 4 | Discussion and Evaluation | 15 |
| 4.1 | Frequently Asked Questions | 15 |
| 4.2 | Analysis of used encoding space | 16 |

| | | |
|----------|---|-----------|
| 5 | Pseudo-Ops, Macros, Algorithms | 19 |
| 5.1 | GREVI Pseudo-Ops | 19 |
| 5.2 | Bit Scanning Operations | 20 |
| 5.3 | MIX/MUX Operations | 20 |
| 5.4 | Emulating other Bit Manipulation ISAs using macro-op fusion | 21 |
| 5.5 | Decoding RISC-V Immediates | 22 |
| 5.6 | Butterfly Operations | 23 |
| 6 | Temporary encoding using NSE opcode space | 25 |
| 7 | Change History | 29 |

Chapter 1

Introduction

This is the RISC-V XBitmanip Extension draft spec. Originally it was the B-Extension draft spec, but the work group got dissolved for bureaucratic reasons in November 2017.

It is currently an independently maintained document. We'd happily donate it to the RISC-V foundation as starting point for a new B-Extension work group, if there will be one.

1.1 ISA Extension Proposal Design Criteria

Any proposed changes to the ISA should be evaluated according to the following criteria.

- **Architecture Consistency:** Decisions must be consistent with RISC-V philosophy. ISA changes should deviate as little as possible from existing RISC-V standards (such as instruction encodings), and should not re-implement features that are already found in the base specification or other extensions.
- **Threshold Metric:** The proposal should provide a *significant* savings in terms of clocks or instructions. As a heuristic, any proposal should replace at least four instructions. An instruction that only replaces three may be considered, but only if the frequency of use is very high.
- **Data-Driven Value:** Usage in real world applications, and corresponding benchmarks showing a performance increase, will contribute to the score of a proposal. A proposal will not be accepted on the merits of its *theoretical* value alone, unless it is used in the real world.
- **Hardware Simplicity:** Though instructions saved is the primary benefit, proposals that dramatically increase the hardware complexity and area, or are difficult to implement, should be penalized and given extra scrutiny. The final proposals should only be made if a test implementation can be produced.
- **Compiler Support:** ISA changes that can be natively detected by the compiler, or are already used as intrinsics, will score higher than instructions which do not fit that criteria.

1.2 B Extension Adoption Strategy

The overall goal of this extension is pervasive adoption by minimizing potential barriers and ensuring the instructions can be mapped to the largest number of ops, either direct or pseudo, that are supported by the most popular processors and compilers. By adding generic instructions and taking advantage of the RISC-V base instructions that already operate on bits, the minimal set of instructions need to be added while at the same time enabling a rich set of operations.

The instructions cover the four major categories of bit manipulation: Count, Extract, Insert, Swap. The spec supports RV32, RV64, and RV128. “Clever” obscure and/or overly specific instructions are avoided in favor of more straight forward, fast, generic ones. Coordination with other emerging RISC-V ISA extensions groups is required to ensure our instruction sets are architecturally consistent.

1.3 Next steps

- Add support for this extension to processor cores and compilers so we can run quantitative evaluations on the instructions.
- Create assembler snippets for common operations that do not map 1:1 to any instruction in this spec, but can be implemented easily using clever combinations of the instructions. Add support for those snippets to compilers.

Chapter 2

RISC-V XBitmanip Extension

In the proposals provided in this section, the C code examples are for illustration purposes. They are not optimal implementations, but are intended to specify the desired functionality.

The sections on encodings are mere placeholders.

2.1 Count Leading Zeros (clz)

This operation counts the number of 0 bits before the first 1 bit (counting from the most significant bit) in the source register. This is related to the “integer logarithm”. It takes a single register as input and operates on the entire register. If the input is 0, the output is XLEN. If the input is ~ 0 , the output is 0.

```
uint_xlen_t clz(uint_xlen_t rs1)
{
    for (int count = 0; count < XLEN; count++)
        if ((rs1 << count) >> (XLEN-1))
            return count;
    return XLEN;
}
```

| | | | | | |
|------------|-------|-------|--------|------|-----------|
| 31 | 20 19 | 15 14 | 12 11 | 7 6 | 0 |
| imm[11:0] | | rs1 | funct3 | rd | opcode |
| 12 | | 5 | 3 | 5 | 7 |
| ?????????? | | src | CLZW | dest | OP-IMM-32 |
| ?????????? | | src | CLZ | dest | OP-IMM |

One possible encoding for `clz` is as a standard I-type opcode somewhere in the brownfield surrounding the shift-immediate instructions.

2.2 Count Bits Set (pcnt)

The purpose of this instruction is to compute the number of 1 bits in a register. It takes a single register as input and operates on the entire register.

This operation counts the total number of set bits in the register.

```
uint_xlen_t pcnt(uint_xlen_t rs1)
{
    int count = 0;
    for (int index = 0; index < XLEN; index++)
        count += (rs1 >> index) & 1;
    return count;
}
```

| 31 | 20 19 | 15 14 | 12 11 | 7 6 | 0 |
|------------|-------|--------|-------|-----------|---|
| imm[11:0] | rs1 | funct3 | rd | opcode | |
| 12 | 5 | 3 | 5 | 7 | |
| ?????????? | src | PCNTW | dest | OP-IMM-32 | |
| ?????????? | src | PCNT | dest | OP-IMM | |

One possible encoding for `pcnt` is as a standard I-type opcode somewhere in the brownfield surrounding the shift-immediate instructions.

2.3 Generalized Reverse (grev, grevi)

The purpose of this instruction is to provide a single hardware instruction that can implement all of byte-order swap, bitwise reversal, short-order-swap, word-order-swap (RV64I), nibble-order swap, bitwise reversal in a byte, etc, all from a single hardware instruction. It takes in a single register value and an immediate that controls which function occurs, through controlling the levels in the recursive tree at which reversals occur.

This operation iteratively checks each bit `immed_i` from `i=0` to `XLEN-1`, in `XLEN` stages, and if the corresponding bit of the ‘function_select’ immediate is true for the current stage, swaps each adjacent pair of 2^i bits in the register.

`grevi` ‘butterfly’ implementation in C on various architectures

```
uint32_t grevi32(uint32_t rs1, int12_t immed)
{
    uint32_t x = rs1;
    uint5_t k = (uint12_t)immed;
    if (k & 1) x = ((x & 0x55555555) << 1) | ((x & 0xAAAAAAAA) >> 1);
    if (k & 2) x = ((x & 0x33333333) << 2) | ((x & 0xCCCCCCCC) >> 2);
}
```




```

    if (k & 4) x = ((x & 0x0F0F0F0F) << 4) | ((x & 0xF0F0F0F0) >> 4);
    if (k & 8) x = ((x & 0x00FF00FF) << 8) | ((x & 0xFF00FF00) >> 8);
    if (k & 16) x = ((x & 0x0000FFFF) <<16) | ((x & 0xFFFF0000) >> 16);
    return x;
}

uint64_t grevi64(uint32_t rs1, int12_t immmed)
{
    uint64_t x = rs1;
    uint6_t k = (uint12_t)immmed;
    if (k & 1) x = ((x & 0x5555555555555555) << 1) | ((x & 0xAAAAAAAAAAAAAAAA) >> 1);
    if (k & 2) x = ((x & 0x3333333333333333) << 2) | ((x & 0xCCCCCCCCCCCCCCCC) >> 2);
    if (k & 4) x = ((x & 0x0F0F0F0F0F0F0F0F) << 4) | ((x & 0xF0F0F0F0F0F0F0F0) >> 4);
    if (k & 8) x = ((x & 0x00FF00FF00FF00FF) << 8) | ((x & 0xFF00FF00FF00FF00) >> 8);
    if (k & 16) x = ((x & 0x0000FFFF0000FFFF) <<16) | ((x & 0xFFFF0000FFFF0000) >> 16);
    if (k & 32) x = ((x & 0x00000000FFFFFF) <<32) | ((x & 0xFFFFFFFF00000000) >> 32);
    return x;
}

```

The above pattern should be intuitive to understand in order to extend this definition in an obvious manner for RV128+.

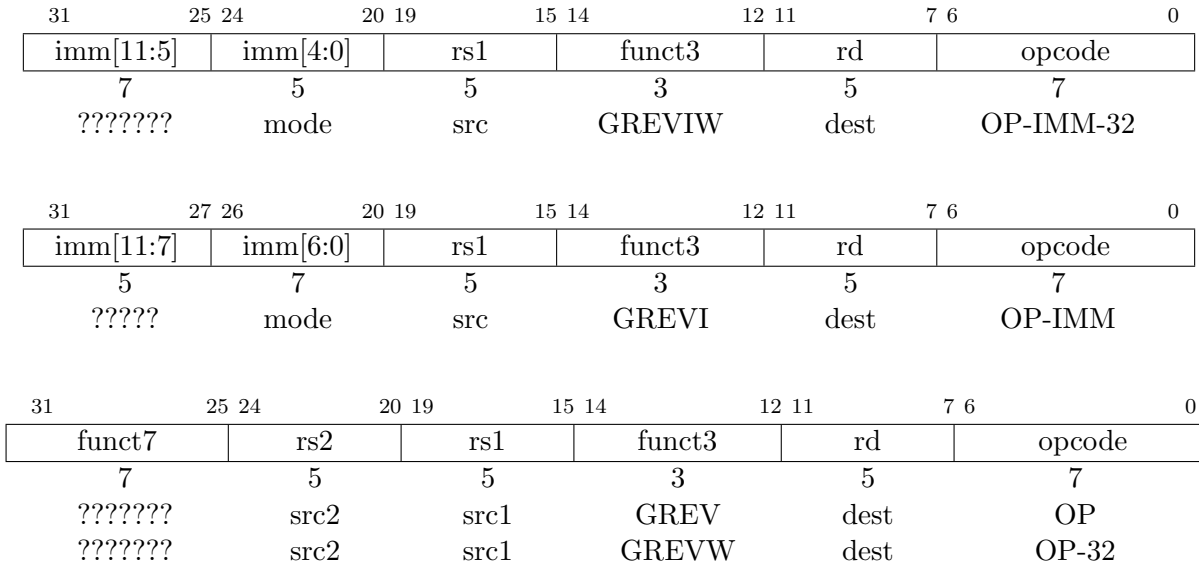

grev is encoded as standard R-type opcode and **grevi** is encoded as standard I-type opcode.

2.4 Shift Ones (Left/Right) (slo, sloi, sro, sroi)

These instructions are similar to shift-logical operations from the base spec, except instead of shifting in zeros, it shifts in ones. This can be used in mask creation or bit-field insertions, for example.

These instructions are exactly the same as the equivalent logical shift operations, except the shift shifts in ones values.

```
uint_xlen_t slo(uint_xlen_t rs1, uint_xlen_t rs2)
{
    int12_t shamt = rs2 & (XLEN-1);
    return ~(~rs1 << shamt);
}
```

```
uint_xlen_t sloi(uint_xlen_t rs1, int12_t immed)
{
    int12_t shamt = immed & (XLEN-1);
    return ~(~rs1 << shamt);
}
```

```
uint_xlen_t sro(uint_xlen_t rs1, uint_xlen_t rs2)
{
    int12_t shamt = rs2 & (XLEN-1);
    return ~(~rs1 >> shamt);
}
```

```
uint_xlen_t sroi(uint_xlen_t rs1, int12_t immed)
{
    int12_t shamt = immed & (XLEN-1);
    return ~(~rs1 >> shamt);
}
```

| 31 | 25 24 | 20 19 | 15 14 | 12 11 | 7 6 | 0 |
|-----------|----------|-------|--------|-------|-----------|---|
| imm[11:5] | imm[4:0] | rs1 | funct3 | rd | opcode | |
| 7 | 5 | 5 | 3 | 5 | 7 | |
| 10????? | shamt | src | SLOIW | dest | OP-IMM-32 | |
| 10????? | shamt | src | SROIW | dest | OP-IMM-32 | |

| 31 | 27 26 | 20 19 | 15 14 | 12 11 | 7 6 | 0 |
|-----------|----------|-------|--------|-------|--------|---|
| imm[11:7] | imm[6:0] | rs1 | funct3 | rd | opcode | |
| 5 | 7 | 5 | 3 | 5 | 7 | |
| 10??? | shamt | src | SLOI | dest | OP-IMM | |
| 10??? | shamt | src | SROI | dest | OP-IMM | |

| 31 | 25 24 | 20 19 | 15 14 | 12 11 | 7 6 | 0 |
|---------|-------|-------|--------|-------|--------|---|
| funct7 | rs2 | rs1 | funct3 | rd | opcode | |
| 7 | 5 | 5 | 3 | 5 | 7 | |
| 10????? | src2 | src1 | SRO | dest | OP | |
| 10????? | src2 | src1 | SLO | dest | OP | |
| 10????? | src2 | src1 | SROW | dest | OP-32 | |
| 10????? | src2 | src1 | SLOW | dest | OP-32 | |

`s(l/r)o(i)` is encoded similarly to the logical shifts in the base spec. However, the spec of the entire family of instructions is changed so that the high bit of the instruction indicates the value to be inserted during a shift. This means that a `sloi` instruction can be encoded similarly to an `slli` instruction, but with a 1 in the highest bit of the encoded instruction. This encoding is backwards compatible with the definition for the shifts in the base spec, but allows for simple addition of a ones-insert.

When implementing this circuit, the only change in the ALU over a standard logical shift is that the value shifted in is not zero, but is a 1-bit register value that has been forwarded from the high bit of the instruction decode. This creates the desired behavior on both logical zero-shifts and logical ones-shifts.



2.5 Rotate (Left/Right) (`rol`, `ror`, `rori`)

These instructions are similar to shift-logical operations from the base spec, except they shift in the values from the opposite side of the register, in order. This is also called ‘circular shift’.

```
uint_xlen_t rol(uint_xlen_t rs1, uint_xlen_t rs2)
{
    int12_t shamt = rs2 & (XLEN-1);
    return (rs1 << shamt) | (rs1 >> (XLEN-shamt));
}
```

```
uint_xlen_t ror(uint_xlen_t rs1, uint_xlen_t rs2)
{
    int12_t shamt = rs2 & (XLEN-1);
    return (rs1 >> shamt) | (rs1 << (XLEN-shamt));
}
```

```
int_xlen_t rori(uint_xlen_t rs1, int12_t imm)
{
    int12_t shamt = imm & (XLEN-1);
    return (rs1 >> shamt) | (rs1 << (XLEN-shamt));
}
```

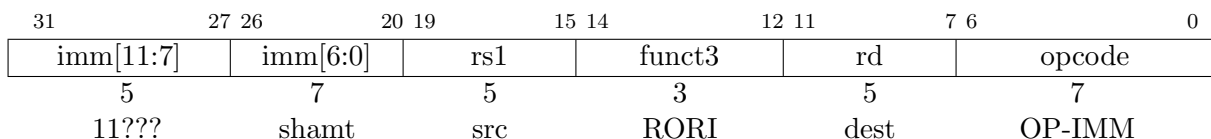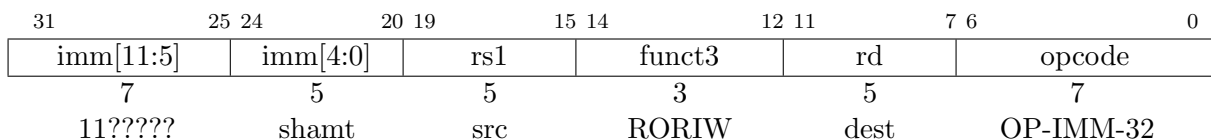

| 31 | 25 24 | 20 19 | 15 14 | 12 11 | 7 6 | 0 |
|---------|-------|-------|--------|-------|--------|---|
| funct7 | rs2 | rs1 | funct3 | rd | opcode | |
| 7 | 5 | 5 | 3 | 5 | 7 | |
| 11????? | src2 | src1 | RORW | dest | OP-32 | |
| 11????? | src2 | src1 | ROLW | dest | OP-32 | |
| 11????? | src2 | src1 | ROR | dest | OP | |
| 11????? | src2 | src1 | ROL | dest | OP | |

Rotate shift is implemented very similarly to the other shift instructions. One possible way to encode it is to re-use the way that bit 30 in the instruction encoding selects ‘arithmetic shift’ when bit 31 is zero (signalling a logical-zero shift). We can re-use this so that when bit 31 is set (signalling a logical-ones shift), if bit 31 is also set, then we are doing a rotate. The following table summarizes the behavior. The generalized reverse opcodes can be encoded using the bit pattern that would otherwise encode an “Arithmetic Left Shift” (which is an operation that does not exist).

Table 2.1: Rotate Encodings

| Bit 31 | Bit 30 | Meaning |
|--------|--------|---------------------|
| 0 | 0 | Logical Shift-Zeros |
| 0 | 1 | Arithmetic Shift |
| 1 | 0 | Logical Shift-Ones |
| 1 | 1 | Rotate |

2.6 And-with-complement (andc)

| 31 | 25 24 | 20 19 | 15 14 | 12 11 | 7 6 | 0 |
|---------|-------|-------|--------|-------|--------|---|
| funct7 | rs2 | rs1 | funct3 | rd | opcode | |
| 7 | 5 | 5 | 3 | 5 | 7 | |
| ??????? | src2 | src1 | ANDC | dest | OP | |
| ??????? | src2 | src1 | ANDCW | dest | OP-32 | |

This is an R-type instruction that implements the and-with-complement operation $x=(a \& \sim b)$ with an assembly format of `andc ro,r1,r2`.

Additionally, the four positive bitwise operations can all be implemented with the same ALU area (e.g. as a single microcode instruction) using a scheme described in the implementation commentary, and fused versions can be implemented as well.

```
uint_xlen_t andc(uint_xlen_t rs1, uint_xlen_t rs2)
{
    return rs1 & ~rs2;
}
```

This instruction should be encoded similarly to the instruction in the base spec. The exact instruc-

tion encoding is to be decided, however.

2.7 Bit Extract/Deposit (bext, bdep)

This is an R-type instruction that implements the generic bit extract and bit deposit functions. Similar implementation can be referred to as gather/scatter or pack/unpack.

BEXT[W] rd,rs1,rs2 collects LSB justified bits to rd from rs1 using extract mask in rs2.

BDEP[W] rd,rs1,rs2 writes LSB justified bits from rs1 to rd using deposit mask in rs2.

```
uint_xlen_t bext(uint_xlen_t v, uint_xlen_t mask)
{
    uint_xlen_t c = 0, m = 1;
    while (mask) {
        uint_xlen_t b = mask & -mask;
        if (v & b)
            c |= m;
        mask -= b;
        m <<= 1;
    }
    return c;
}
```

```
uint_xlen_t bdep(uint_xlen_t v, uint_xlen_t mask)
{
    uint_xlen_t c = 0, m = 1;
    while (mask) {
        uint_xlen_t b = mask & -mask;
        if (v & m)
            c |= b;
        mask -= b;
        m <<= 1;
    }
    return c;
}
```

| | | | | | | |
|---------|-------|-------|--------|-------|--------|---|
| 31 | 25 24 | 20 19 | 15 14 | 12 11 | 7 6 | 0 |
| funct7 | rs2 | rs1 | funct3 | rd | opcode | |
| 7 | 5 | 5 | 3 | 5 | 7 | |
| ??????? | src2 | src1 | BEXT | dest | OP | |
| ??????? | src2 | src1 | BDEP | dest | OP | |
| ??????? | src2 | src1 | BEXTW | dest | OP-32 | |
| ??????? | src2 | src1 | BDEPW | dest | OP-32 | |

This instruction should be encoded similarly to the instruction in the base spec. The exact instruction encoding is to be decided, however.

2.8 Compressed instructions (c.not, c.neg, c.clz, c.brev)

The RISC-V ISA has no dedicated instructions for bitwise inverse (**not**) and arithmetic inverse (**neg**). Instead **not** is implemented as **xori rd, rs, -1** and **neg** is implemented as **sub rd, x0, rs**.

In bitmanipulation code **not** and **neg** are very common operations. But there are no compressed encodings for those operations because there is no **c.xori** instructions and **c.sub** can not operate on **x0**.

Many bit manipulation operations that have dedicated opcodes in other ISAs must be constructed from smaller atoms in RISC-V XBitmanip code. But implementations might chose to implement them in a single micro-op using macro-op-fusion. For this it can be helpful when the fused sequences are short. **not** and **neg** are good candidates for macro-op-fusion, so it can be helpful to have compressed opcodes for them.

Likewise, **clz** and **brev** (an alias for **grevi rd, rs, -1**, i.e. bitwise reversal) are very common atoms for building common bit manipulation operations. So it is helpful to have compressed opcodes for them as well.

For example, the equivalent to the x86 instruction **BSR** (find index of highest set bit) can be implemented using the following 64 bit sequence that does not spill other registers (and thus is a prime candidate for macro-op-fusion):

```
bsr rsd:
  c.clz rsd
  c.neg rsd
  addi rsd, rsd, 32
```

Likewise, the AMD TBM extension adds 10 x86 bit manipulation instructions. The equivalent RISC-V code sequences can utilize **c.not** in half of the cases.

The compressed instructions **c.not**, **c.neg**, **c.clz**, **c.brev** must be supported by all implementations that support the C extension and XBitmanip.

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
|-----|----|----|-----------|----|----|---|-----------|---|---|---|------------------|---|---|----|---|---|
| 011 | | | nzimm[9] | | | | 2 | | | | nzimm[4 6 8:7 5] | | | 01 | | C.ADDI16SP (<i>RES</i> , <i>nzimm</i> =0) |
| 011 | | | nzimm[17] | | | | rd≠{0, 2} | | | | nzimm[16:12] | | | 01 | | C.LUI (<i>RES</i> , <i>nzimm</i> =0; <i>HINT</i> , <i>rd</i> =0) |
| 011 | | | 0 | | 00 | | rs2'/rd' | | | | 0 | | | 01 | | C.NEG |
| 011 | | | 0 | | 01 | | rs1'/rd' | | | | 0 | | | 01 | | C.NOT |
| 011 | | | 0 | | 10 | | rs1'/rd' | | | | 0 | | | 01 | | C.CLZ |
| 011 | | | 0 | | 11 | | rs1'/rd' | | | | 0 | | | 01 | | C.BREV |

This four instructions fit nicely in the reserved space in C.LUI/C.ADDI16SP. They only occupy 0.13% of the ≈ 15.6 bits wide RVC encoding space.

Chapter 3

Alternatives to `bext` and `bdep`

There are issues with `bext` and `bdep`. One is the high hardware cost of the unit performing the operations. Another is the open question of patents potentially preventing implementations to use the best-known single-cycle implementations.

Various multi-cycle implementations have been proposed, but preliminary evaluations of real-world bit manipulation tasks show that multi-cycle `bext` and `bdep` often are not fast enough to outperform algorithms that use sequences of shifts and bit masks.

However, some operations that would benefit from `bext` and `bdep` would be very hard to implement without them. Some examples are Bit scatter/gather (compress/uncompress) operations, goats-and-sheeps, and calculating the index of the Nth set bit in a word. For example, the following code efficiently calculates the index of the twelfth set bit in `a0` using `bdep`:

```
li a1, 0x00000800
bdep a0, a0, a1
brev a0, a0
clz a0, a0
```

The instruction encoding space used by `bext` and `bdep` is minimal, i.e. not much is gained by preserving the opcode space occupied by the two instructions. So one possible solution would be to make `bext` and `bdep` optional features that may be emulated by software, and add fast implementations of the much simpler instructions below that simplify some of the most common cases that would otherwise benefit from a fast `bext` and `bdep` unit.

For small cores this would be an immense simplification because they would not need to implement `bext` and `bdep` in hardware. For large cores that provide `bext` and `bdep` hardware, adding the instructions below is only a minor additional effort. But this additional effort would not be in vain because the instructions below are somewhat orthogonal to `bext` and `bdep`, so that overall the combined feature set of `bext` and `bdep` and the instructions below would be even more powerful than `bext` and `bdep` alone.

A compiler would decide to use `bext` or `bdep` based on the optimization profile for the concrete processor it is optimizing for, similar to the decision whether to use `MUL` or `DIV` with a constant,

or to perform the same operation using a longer sequence of much simpler operations.

3.1 Generalized Reverse Masked (grevm0, grevm1, ...)

The `grevmN` instructions performs the `grev` operation with argument 2^N , followed by a mask operation using the lower $XLEN/2$ bits of the second argument, one mask bit for each pair of bits that may be swapped by the `grev` operation. If the mask bit is set then the swap is taken, otherwise the bit values stay in their position.

```
uint_xlen_t swapbits(uint_xlen_t x, int p, int q)
{
    assert(p < q);
    x = x ^ ((x & (1 << p)) << (q-p));
    x = x ^ ((x & (1 << q)) >> (q-p));
    x = x ^ ((x & (1 << p)) << (q-p));
}

uint_xlen_t grevmN(uint_xlen_t rs1, uint_xlen_t rs1, int N)
{
    int a = 1 << N, b = 2*b;
    uint_xlen_t x = rs1;
    for (int i = 0; i < XLEN/2; i++) {
        int p = b*(i/a) + i%a, q = b*(i/a) + i%a + a;
        if (rs1 & (1 << i))
            x = swapbits(x, p, q);
    }
    return x;
}
```

The assembler should implement those instructions using a generic `grevm` mnemonic with a fourth constant parameter for N , and also provide `grevmN` pseudo-ops.

With the help of `grevmN` an arbitrary bit permutation can be computed using $4(\log_2 XLEN) - 2$ instructions and $(\log_2 XLEN) - 0.5$ data words using a Bene network. For example on RV32:

```
lhu a2, 4(a1)
grevm a0, a0, a2, 4

lhu a2, 2(a1)
grevm a0, a0, a2, 3

lhu a2, 4(a1)
grevm a0, a0, a2, 2

lhu a2, 6(a1)
```



```
grevm a0, a0, a2, 1
```

```
lhu a2, 8(a1)
```

```
grevm a0, a0, a2, 0
```

```
lhu a2, 10(a1)
```

```
grevm a0, a0, a2, 1
```

```
lhu a2, 12(a1)
```

```
grevm a0, a0, a2, 2
```

```
lhu a2, 14(a1)
```

```
grevm a0, a0, a2, 3
```

```
lhu a2, 16(a1)
```

```
grevm a0, a0, a2, 4
```

Similarly, a butterfly network or inverse butterfly network can be implemented in $2(\log_2 \text{XLEN})$ instructions and $(\log_2 \text{XLEN})/2$ data words.

3.2 Bit Shuffle (zip, unzip)

The `zip` instruction interleaves the bits of the lower and upper half of its argument. The `unzip` instruction performs the inverse.

In other words, `zip` performs a rotate left shift on the bit indices, and `unzip` performs a rotate right shift on the bit indices.

Performing `zip` $\log_2 \text{XLEN}$ times is the identity. Performing it $(\log_2 \text{XLEN}) - 1$ times is equivalent to one execution of `unzip`.

```
uint_xlen_t zip(uint_xlen_t rs1)
{
    uint_xlen_t x = 0;
    for (int i = 0; i < XLEN/2; i++) {
        x |= ((rs1 >> i) & 1) << (2*i);
        x |= ((rs1 >> (i+XLEN/2)) & 1) << (2*i+1);
    }
    return x;
}
```

```
uint_xlen_t unzip(uint_xlen_t rs1)
{
    uint_xlen_t x = 0;
    for (int i = 0; i < XLEN/2; i++) {
```

```

        x |= ((rs1 >> (2*i)) & 1) << i;
        x |= ((rs1 >> (2*i+1)) & 1) << (i+XLEN/2);
    }
    return x;
}

```

The **zip** instruction followed by a **grevm0** instruction implements a single stage of an omega network.

The **zip** instruction with the upper half of its input cleared performs the commonly needed “fan-out” operation. (Equivalent to **bdep** with a 0x55555555 mask.) The **zip** instruction applied twice fans out the bits in the lower quarter of the input word by a spacing of 4 bits.

For example, calculating the bitwise prefix sum of the bits in the lower byte of a 32 bit word on RV32:

```

andi a0, a0, 0xff
zip a0, a0
zip a0, a0
slli a1, a0, 4
add a0, a1
slli a1, a0, 8
add a0, a1
slli a1, a0, 16
add a0, a1

```

The final prefix sum is stored in the 8 nibbles of the **a0** output word.

Chapter 4

Discussion and Evaluation

4.1 Frequently Asked Questions

Why `clz` instead of `ctz`? Why not `XYZ`?

The important thing is that we wanted to have a small ISA that only provides useful atoms for building most of the other "usual" bit manipulation instructions.

If we chose `clz` or `ctz` is not that important. But we want to pick only one and let the user build the other by combining the supported instruction with bitwise reverse (which is provided by `grevi`).

`grev[i]` seems to be overly complicated? Do we really need it?

The `grevi` instruction can be used to build a wide range of common bit permutation instructions. For example on RV32:

Table 4.1: Some GREVI Pseudo-Instructions

| Mode | Meaning on RV32 |
|------|-----------------------------------|
| 4 | swap the nibbles of each byte |
| 7 | reverse the bits in each byte |
| 15 | reverse the bits in each halfword |
| 16 | swap the two half words halfword |
| 24 | reverse the byte order |
| 31 | bitwise reverse |

If `grevi` were removed from this spec we would need to add a few new instructions in its place for operations such as bitwise reverse or endianness conversion.

Do we really need all the *w opcodes for 32 bit ops on RV64?

I don't know. I think nobody does know at the moment. But they add very little complexity to the core. So the only question is if it is worth the encoding space. We need to run proper experiments with compilers that support those instructions. So they are in for now and if future evaluations show that they are not worth the encoding space then we can still throw them out.

Why only andc and not any other complement operators?

Early versions of this spec also included other *c operators. But experiments¹ have show that `andc` is much more common in bit manipulation code than any other operators. Especially because it is commonly used in `mix` and `mux` operations.

BEXT/BDEP look like really expensive operations. Do we really need them?

Yes, they are expensive, but not as expensive as one might expect. A single-cycle 32 bit BEXT+BDEP+GREV core can be implemented in less space than a single-cycle 16x16 bit multiplier with 32 bit output.²

4.2 Analysis of used encoding space

So how much encoding space is used by the XBitmanip extension?

Table 4.2: XBitmanip encoding space (\log_2 , i.e. in equivalent number of bits)

| RV32 | | RV64 | | Instruction |
|------|----|------|----|---------------------------------------|
| 2x | 10 | 4x | 10 | CLZ, CLZW, PCNT, PCNTW |
| 1x | 15 | 3x | 15 | GREV, GREVW, GREVIW |
| 1x | 15 | 1x | 16 | GREVI |
| 2x | 15 | 6x | 15 | SLO, SRO, SLOW, SROW, SLOIW, SROIW |
| 2x | 15 | 2x | 16 | SLOI, SROI |
| 2x | 15 | 5x | 15 | ROR, ROL, RORW, ROLW, RORIW |
| 1x | 15 | 1x | 16 | RORI |
| 3x | 15 | 6x | 15 | ANDC, BEXT, BDEP, ANDCW, BEXTW, BDEPW |
| 4x | 4 | 4x | 4 | C.NEG, C.NOT, C.CLZ, C.BREV |

In the compressed encoding space XBitmanip needs the equivalent of a 6 bit encoding space, or

¹<http://svn.clifford.at/handicraft/2017/bitcode/>

²<https://github.com/cliffordwolf/bextdep>

$\approx 0.13\%$ of the total ≈ 15.6 bits available. $(100/(2^{15.6-6}) \approx 0.13)$

On RV32, XBitmanip requires the equivalent of a ≈ 18.6 bit encoding space in the uncompressed encoding space. For comparison: A single standard I-type instruction (such as `ADDI` or `SLTIU`) requires a 22 bit encoding space. I.e. the entire RV32 XBitmanip extension needs less than one-eighth of the encoding space of the `SLTIU` instruction.

$$\frac{\log(2 \cdot 2^{10} + 12 \cdot 2^{15})}{\log(2)} \approx 18.6$$

On RV64, XBitmanip requires the equivalent of a ≈ 19.8 bit encoding space in the uncompressed encoding space. I.e. the entire RV64 XBitmanip extension needs less than one-quarter of the encoding space of the `SLTIU` instruction.

$$\frac{\log(4 \cdot 2^{10} + 20 \cdot 2^{15} + 4 \cdot 2^{16})}{\log(2)} \approx 19.8$$

Chapter 5

Pseudo-Ops, Macros, Algorithms

This chapter contains a collection of pseudo-ops, macros, and algorithms using the XBitmanip extension. For the sake of simplicity we assume RV32 for most examples in this chapter.

Most assembler routines in this chapter are written as if they were ABI functions, i.e. arguments are passed in a0, a1, ... and results are returned in a0. Registers t0, t1, ... are used for spilling.

Some of the assembler routines below can not or should not overwrite their first argument. In those cases the arguments are passed in a1, a2, ... and results are returned in a0.

5.1 GREVI Pseudo-Ops

Tables 5.1 and 5.2 list assembler pseudo-ops for commonly used `grevi` commands.

| Pseudoinstruction | Base Instruction(s) | Meaning |
|-----------------------------|-------------------------------|--|
| <code>brev rd, rs</code> | <code>grevi rd, rs, 31</code> | bitwise reverse |
| <code>bswap rd, rs</code> | <code>grevi rd, rs, 24</code> | reverse the byte order |
| <code>bswap.h rd, rs</code> | <code>grevi rd, rs, 8</code> | reverse the byte order in each half word |
| <code>hswap rd, rs</code> | <code>grevi rd, rs, 16</code> | reverse the order of half words |

Table 5.1: RV32 GREVI Pseudoinstructions.

| Pseudoinstruction | Base Instruction(s) | Meaning |
|-----------------------------|-------------------------------|--|
| <code>brev rd, rs</code> | <code>grevi rd, rs, 63</code> | bitwise reverse |
| <code>bswap rd, rs</code> | <code>grevi rd, rs, 56</code> | reverse the byte order |
| <code>bswap.h rd, rs</code> | <code>grevi rd, rs, 8</code> | reverse the byte order in each half word |
| <code>bswap.w rd, rs</code> | <code>grevi rd, rs, 24</code> | reverse the byte order in each word |
| <code>hswap rd, rs</code> | <code>grevi rd, rs, 48</code> | reverse the order of half words |
| <code>hswap.w rd, rs</code> | <code>grevi rd, rs, 16</code> | reverse the order of half words in each word |
| <code>wswap rd, rs</code> | <code>grevi rd, rs, 32</code> | reverse the order of words |

Table 5.2: RV64 GREVI Pseudoinstructions.

5.2 Bit Scanning Operations

Count Leading Zeros

This is trivially just the `clz` instruction:

```
clz a0, a0
```

Count Leading Ones

Simply invert before executing the `clz` instruction:

```
not a0, a0
clz a0, a0
```

Find index of highest bit set (aka `ilog2`)

```
clz a0, a0
neg a0, a0
addi a0, a0, 32
```

Find index of lowest bit set

```
brev a0, a0
clz a0, a0
```

5.3 MIX/MUX Operations

MIX Operation

A MIX operation selects bits from arguments `a1` and `a2` based on the bits in the control word `a0`.

```
and t0, a1, a0
andc a0, a2, a0
or a0, a0, t0
```

MUX Operation

A MUX operation selects word `a1` or `a2` based on if the control word `a0` is zero or nonzero, without branching. (The `snez` instruction is optional if `a0` is already either 0 or 1.)


```

snez a0, a0
neg a0, a0
and t0, a1, a0
andc a0, a2, a0
or a0, a0, t0

```

5.4 Emulating other Bit Manipulation ISAs using macro-op fusion

The following code snippets implement all instructions from the x86 bit manipulation ISA extensions ABM, BMI1, BMI2, and TBM using RISC-V code that does not spill any registers and thus could easily be implemented in a single instruction using macro-op fusion. (Some of them simply map directly to instructions in this spec and so no macro-op fusion is needed.) Note that shorter RISC-V code sequences are possible if we allow spilling to temporary registers.

Table 5.3: Emulating other Bit Manipulation ISAs using macro-op fusion

| x86 Ext | x86 Instruction | Bytes | | RISC-V Code |
|---------|--|-------|----|--|
| | | x86 | RV | |
| ABM | <code>popcnt</code> | 5 | 2 | <code>c.pcnt a0</code> |
| | <code>lzcnt</code> | 5 | 2 | <code>c.clz a0</code> |
| BMI1 | <code>andn</code> | 5 | 4 | <code>andc a0, a2, a1</code> |
| | <code>bextr (regs)</code> ¹ | 5 | 12 | <code>c.add a0, a1</code> <code>slo a0, zero, a0</code> <code>c.and a0, a2</code> <code>srl a0, a0, a1</code> |
| | <code>blsi</code> | 5 | 6 | <code>neg a0, a1</code> <code>c.and a0, a1</code> |
| | <code>blsmask</code> | 5 | 6 | <code>addi a0, a1, -1</code> <code>c.xor a0, a1</code> |
| | <code>blsr</code> | 5 | 6 | <code>addi a0, a1, -1</code> <code>c.and a0, a1</code> |
| | | | | |
| BMI2 | <code>bzhi</code> | 5 | 6 | <code>slo a0, zero, a2</code> <code>c.and a0, a1</code> |
| | <code>mulx</code> ² | 5 | 4 | <code>mul</code> |
| | <code>pdep</code> | 5 | 4 | <code>bdep</code> |
| | <code>pext</code> | 5 | 4 | <code>bext</code> |
| | <code>rorx</code> ² | 6 | 4 | <code>rori</code> |
| | <code>sarx</code> ² | 5 | 4 | <code>sra</code> |
| | <code>shrx</code> ² | 5 | 4 | <code>srl</code> |
| | <code>shlx</code> ² | 5 | 4 | <code>sll</code> |

¹ The BMI1 `bextr` instruction expects the length and start position packed in one register operand. Our version expects the length in a0, start position in a1, and source value in a2.

² The `*x` BMI2 instructions just perform the indicated operation without changing any flags. RISC-V does not use flags, so this instructions trivially just map to their regular RISC-V counterparts.

| x86 Ext | x86 Instruction | Bytes | | RISC-V Code |
|---------|-----------------|-------|----|--|
| | | x86 | RV | |
| TBM | bextr (imm) | 7 | 4 | c.slli a0, (32-START-LEN) c.srli a0, (32-LEN) |
| | blcfill | 5 | 6 | addi a0, a1, 1 c.and a0, a1 |
| | blci | 5 | 8 | addi a0, a1, 1 c.not a0 c.or a0, a1 |
| | blcic | 5 | 10 | addi a0, a1, 1 andc a0, a1, a0 c.not a0 |
| | blcmask | 5 | 6 | addi a0, a1, 1 c.xor a0, a1 |
| | blcs | 5 | 6 | addi a0, a1, 1 c.or a0, a1 |
| | blsfill | 5 | 6 | addi a0, a1, -1 c.or a0, a1 |
| | blsic | 5 | 10 | addi a0, a1, -1 andc a0, a1, a0 c.not a0 |
| | t1mskc | 5 | 10 | addi a0, a1, +1 andc a0, a1, a0 c.not a0 |
| | t1msk | 5 | 8 | addi a0, a1, -1 andc a0, a0, a1 |

5.5 Decoding RISC-V Immediates

The following code snippets decode the immediate from RISC-V S-type, B-type, and J-type instructions using `bext`.

| | | | | | | | | | | | | | | |
|-----------------------|----|----|----|-----|-----|--------|-------------|----|----|----|--------|--------|---|--------|
| 31 | 27 | 26 | 25 | 24 | 20 | 19 | 15 | 14 | 12 | 11 | 7 | 6 | 0 | |
| imm[11:5] | | | | rs2 | rs1 | funct3 | imm[4:0] | | | | opcode | | | S-type |
| imm[12:10:5] | | | | rs2 | rs1 | funct3 | imm[4:1:11] | | | | opcode | | | B-type |
| imm[20:10:1:11:19:12] | | | | | | | | | | rd | | opcode | | J-type |

```

decode_s:
    li t0, 0xfe000f80
    bext a0, a0, t0
    c.slli a0, 20
    c.srai a0, 20

```

```

decode_b:
    li t0, 0x80000080
    li t1, 0x7e000f00
    bext a1, a0, t0
    bext a0, a0, t1
    c.slli a1, 30
    c.slli a0, 20
    c.or a0, a1
    c.srai a0, 19

```

```

decode_j:
    li t0, 0x800ff000
    li t1, 0x00100000
    li t2, 0x7fe00000
    bext a2, a0, t0
    bext a1, a0, t1
    bext a0, a0, t2
    c.slli a2, 23
    c.slli a1, 22
    c.slli a0, 12
    c.or a0, a2
    c.or a0, a1
    c.srai a0, 11

```

5.6 Butterfly Operations

The `grev`, `bext`, and `bdep` instructions are commonly implemented using butterfly circuits³. (Butterfly circuits are a powerful tool for implementing bit permutations.) However, sometimes one wants to use butterfly operations directly in a program and it is not immediately obvious how to use GREVI and BDEP to perform butterfly operations.

One can easily implement a single butterfly stage using GREVI in just four instructions:

```

grevi t0, a0, N
and t0, t0, a1
andc a0, a0, a1
or a0, a0, t0

```

With `a0` containing the data input on entry and the result on exit. `N` is a power of two indicating which butterfly stage to implement, and `a1` contains an XLEN bitmask derived from the XLEN/2 butterfly control word.

This bitmask can either be pre-computed or, if it needs to be generated on-the-fly, it can easily be calculated with the help of BDEP. For example for the first butterfly stage (using `a0` as input and output):

³http://programming.sirrida.de/bit_perm.html#butterfly

```
li t0, 0x55555555
bdep t0, a0, t0
slli a0, t0, 1
or a0, a0, t0
```

Likewise for the second butterfly stage:

```
li t0, 0x33333333
bdep t0, a0, t0
slli a0, t0, 2
or a0, a0, t0
```

For the third stage:

```
li t0, 0xf0f0f0f0
bdep t0, a0, t0
slli a0, t0, 4
or a0, a0, t0
```

For the fourth stage:

```
li t0, 0x00ff00ff
bdep t0, a0, t0
slli a0, t0, 8
or a0, a0, t0
```

And for the fifth stage:

```
li t0, 0x0000ffff
and t0, a0, t0
slli a0, t0, 16
or a0, a0, t0
```

Chapter 6

Temporary encoding using NSE opcode space

This is currently a non-standard extension so we need instruction encodings using "custom" opcodes. The long-term goal for this spec is to become the official B extension. So the encoding in this chapter is a temporary solution for the meantime, allowing us to build compilers and processors to evaluate the extension.

The temporary encoding uses the funct3=000 space in opcode *custom-0* for the uncompressed instructions and the nzuimm[5]=1, nzuimm[4:0]=0 space in C.SLLI for the compressed RV32 instructions.

On RV64 there is no NSE space in the C instruction listing, therefore no encoding for compressed bit manipulation instructions is defined on RV64. (The availability of compressed bit manipulation instructions on RV32 should be sufficient to evaluate the utility of those instructions.)

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
|-----|----|----|-----------|----|----|---|---|----------|---|---|---|---|---|---|----|---|
| 000 | | | nzuimm[5] | | | | | rs1/rd≠0 | | | | | | | 10 | C.SLLI (<i>HINT, rd=0; RV32-NSE, nzuimm[5]=1</i>) |
| 000 | | | 1 | | | | | 00 | | | | | | | 10 | C.NEG |
| 000 | | | 1 | | | | | 01 | | | | | | | 10 | C.NOT |
| 000 | | | 1 | | | | | 10 | | | | | | | 10 | C.CLZ |
| 000 | | | 1 | | | | | 11 | | | | | | | 10 | C.BREV |

| | | | | | | | | | | | | | | |
|-----------|----|----|----|-----|----|-----|----|--------|----|----|---|--------|---|--------|
| 31 | 27 | 26 | 25 | 24 | 20 | 19 | 15 | 14 | 12 | 11 | 7 | 6 | 0 | |
| funct7 | | | | rs2 | | rs1 | | funct3 | | rd | | opcode | | R-type |
| imm[11:0] | | | | | | rs1 | | funct3 | | rd | | opcode | | I-type |

RV32 XBitmanip Instruction Set

| | | | | | | |
|---------|-------|-----|-----|----|---------|-------|
| 0000000 | 00000 | rs1 | 000 | rd | 0001011 | CLZ |
| 0001000 | 00000 | rs1 | 000 | rd | 0001011 | PCNT |
| 0010000 | rs2 | rs1 | 000 | rd | 0001011 | GREV |
| 0010100 | mode | rs1 | 000 | rd | 0001011 | GREVI |
| 0011000 | rs2 | rs1 | 000 | rd | 0001011 | ANDC |
| 0100000 | rs2 | rs1 | 000 | rd | 0001011 | BEXT |
| 0101000 | rs2 | rs1 | 000 | rd | 0001011 | BDEP |
| 1000100 | shamt | rs1 | 000 | rd | 0001011 | SLOI |
| 1010100 | shamt | rs1 | 000 | rd | 0001011 | SROI |
| 1110100 | shamt | rs1 | 000 | rd | 0001011 | RORI |
| 1000000 | rs2 | rs1 | 000 | rd | 0001011 | SLO |
| 1010000 | rs2 | rs1 | 000 | rd | 0001011 | SRO |
| 1100000 | rs2 | rs1 | 000 | rd | 0001011 | ROL |
| 1110000 | rs2 | rs1 | 000 | rd | 0001011 | ROR |

| | | | | | | | | | | | | | | |
|-----------|----|----|----|-----|----|-----|----|--------|----|----|---|--------|---|--------|
| 31 | 27 | 26 | 25 | 24 | 20 | 19 | 15 | 14 | 12 | 11 | 7 | 6 | 0 | |
| funct7 | | | | rs2 | | rs1 | | funct3 | | rd | | opcode | | R-type |
| imm[11:0] | | | | | | rs1 | | funct3 | | rd | | opcode | | I-type |

RV64 XBitmanip Instruction Set

| | | | | | | |
|---------|-------|-----|-----|----|---------|--------|
| 0000000 | 00000 | rs1 | 000 | rd | 0001011 | CLZ |
| 0000010 | 00000 | rs1 | 000 | rd | 0001011 | CLZW |
| 0001000 | 00000 | rs1 | 000 | rd | 0001011 | PCNT |
| 0001010 | 00000 | rs1 | 000 | rd | 0001011 | PCNTW |
| 0010000 | rs2 | rs1 | 000 | rd | 0001011 | GREV |
| 0010010 | rs2 | rs1 | 000 | rd | 0001011 | GREVW |
| 001010 | mode | rs1 | 000 | rd | 0001011 | GREVI |
| 0010110 | mode | rs1 | 000 | rd | 0001011 | GREVIW |
| 0011000 | rs2 | rs1 | 000 | rd | 0001011 | ANDC |
| 0011010 | rs2 | rs1 | 000 | rd | 0001011 | ANDCW |
| 0100000 | rs2 | rs1 | 000 | rd | 0001011 | BEXT |
| 0100010 | rs2 | rs1 | 000 | rd | 0001011 | BEXTW |
| 0101000 | rs2 | rs1 | 000 | rd | 0001011 | BDEP |
| 0101010 | rs2 | rs1 | 000 | rd | 0001011 | BDEPW |
| 100010 | shamt | rs1 | 000 | rd | 0001011 | SLOI |
| 1000110 | shamt | rs1 | 000 | rd | 0001011 | SLOIW |
| 101010 | shamt | rs1 | 000 | rd | 0001011 | SROI |
| 1010110 | shamt | rs1 | 000 | rd | 0001011 | SROIW |
| 111010 | shamt | rs1 | 000 | rd | 0001011 | RORI |
| 1110110 | shamt | rs1 | 000 | rd | 0001011 | RORIW |
| 1000000 | rs2 | rs1 | 000 | rd | 0001011 | SLO |
| 1000010 | rs2 | rs1 | 000 | rd | 0001011 | SLOW |
| 1010000 | rs2 | rs1 | 000 | rd | 0001011 | SRO |
| 1010010 | rs2 | rs1 | 000 | rd | 0001011 | SROW |
| 1100000 | rs2 | rs1 | 000 | rd | 0001011 | ROL |
| 1100010 | rs2 | rs1 | 000 | rd | 0001011 | ROLW |
| 1110000 | rs2 | rs1 | 000 | rd | 0001011 | ROR |
| 1110010 | rs2 | rs1 | 000 | rd | 0001011 | RORW |

Chapter 7

Change History

Table 7.1: Summary of Changes

| Date | Rev | Changes |
|------------|------|--|
| 2017-07-17 | 0.10 | Initial Draft |
| 2017-11-02 | 0.11 | Removed roli, assembler can convert it to use a rori Removed bitwise subset and replaced with andc Doc source text same base for study and spec. Fixed typos |
| 2017-11-30 | 0.32 | Jump rev number to be on par with associated Study Moved pdep/pext into spec draft and called it scattergaher |
| 2018-04-07 | 0.33 | Move to github, throw out study, convert from .md to .tex Fixed typos and fixed some reference C implementations Rename bgat/bsca to bext/bdep Remove post-add immediate from clz Clean up encoding tables and code sections |
| ????-??-?? | 0.34 | Add GREV and compressed instructions Restructure document: Move discussions to extra sections Add FAQ, add analysis of used encoding space Add chapter on Pseudo-Ops, Macros, Algorithms Add chapter on temporary encoding using custom opcode space Add chapter on alternatives to bext/bdep |