MIL-G-52622B(ME)
29 June 1978
SUPERSEDING
MIL-P-52622A(ME)
29 February 1972

MILITARY SPECIFICATION

GENERATOR SETS, GASOLINE ENGINE, TRAILER MOUNTED,

5 KW, 60 HERTZ, PU-631/G

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers trailer mounted generator sets (hereinafter referred to as a power unit) designated PU-631/G. The power unit consists of two military design, gasoline-engine-driven, 5 kw, 60 Hz generator sets, various auxiliary equipment, brackets, and hardware mounted on a modified trailer chassis.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378 - Plastic Sheet and Strip, Thin Gage, Polyolefin.

FSC 6115

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

4.5 Inspection procedure.

4.5.1 Examination. The power unit shall be examined for the following defects:

101. Any dimension shown on the drawings not as specified.
102. Components missing or not as specified.
103. Assembly not as shown on the drawings.
104. Identification or special marking missing or illegible.
105. Treatment and painting not as specified.
106. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Test conditions. The following preparations shall be made prior to testing the distribution box assembly:

(a) Cables running between the distribution box assembly and the generator sets shall be installed to the distribution box assembly transfer switch.
(b) The free ends of the cables shall be attached to a commercial power source as follows:

(1) Cable wire marked L_1 shall be attached to phase A.
(2) Cable wire marked L_2 shall be attached to phase B.
(3) Cable wire marked L_3 shall be attached to phase C.
(4) Cable wire marked L_0 shall be attached to neutral.

4.5.2.2 Test procedures. Tests shall be conducted in accordance with MIL-STD-705 and as specified herein. Test instruments shall be of the laboratory type and shall have been calibrated within 30 days prior to the start of testing and at intervals not greater than 6 months thereafter.

4.5.2.3 Operation. The transfer switch of the distribution box shall be placed in the generator No. 1 position. Commericial power, equivalent to the rated load of the generator set, shall be supplied through the transfer switch for a minimum of 5 minutes. During this period, phase sequence (rotation) shall be tested in accordance with MIL-STD-705, Method 507.1. Phase rotation shall be L_1, L_2, and L_3. This test shall be performed at the terminal posts of the distribution box. At the conclusion of the generator No. 1 position test, the transfer switch shall be placed in the generator No. 2 position. Repeat the test. Inability of the distribution box assembly to maintain or transfer a rated load shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

surveillance and approval by the Government (see 6.5). The preproduction pack may be accomplished utilizing either the preproduction model power unit or a production power unit. If the preproduction model power unit is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the preproduction model power unit and production power units.

5.2 Preservation. Preservation shall be Level A, Level B, or Commercial as specified (see 6.2). Preservation and consolidation of power unit components shall be in accordance with Table I, Figures 1, 2, and 3, and as specified herein.

5.2.1 Level A.

5.2.1.1 Generator sets. Each generator set shall be preserved in accordance with MIL-G-28554, Level A. The generator sets shall be secured directly through the barrier material to the trailer using the required bolts in lieu of the wood base specified in the packaging requirement of MIL-G-28554. The humidity indicators and inspection ports shall be installed on an end or side in a location convenient for inspection of the humidity indicators. Before sealing the barrier, the fiberboard caps specified in Table I and Figure 2 herein shall be installed on the generator sets.

5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, Type CF, Variety SW, Grade 125, style optional.

5.2.1.3 Cables. Power and ground cables shall be disconnected from the generator sets. Each disconnected cable and terminals on the generator sets shall be matchmarked with cloth tags conforming to UU-T-81, Type A, to facilitate reinstallation of the cables.

5.2.1.4 Repair parts. The preservation application criteria and applicable submethods of MIL-P-116 shall be used to preserve the repair parts.

5.2.1.5 Maintenance tools. Maintenance tools shall be preserved in accordance with PPP-P-40, Level A.

5.2.1.6 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, Method IC-1 and shall be secured to one of the generator sets outside the Method II barrier.

5.2.1.7 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, Level A, as specified for mobile vehicles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the power units in accordance with this specification.

6.6 Depreservation guide. The contracting officer should arrange to furnish the necessary copies of DA Form 2258, when requested by the contractor (see 5.5).

6.7 Registration numbers. The contracting officer should arrange to furnish a list of registration numbers to be applied to the trailer (see 3.1.1.1).

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).


Custodian:
Army - ME

Review activity:
DLA - GS

Preparing activity:
Army - ME

Project 6115-A415

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

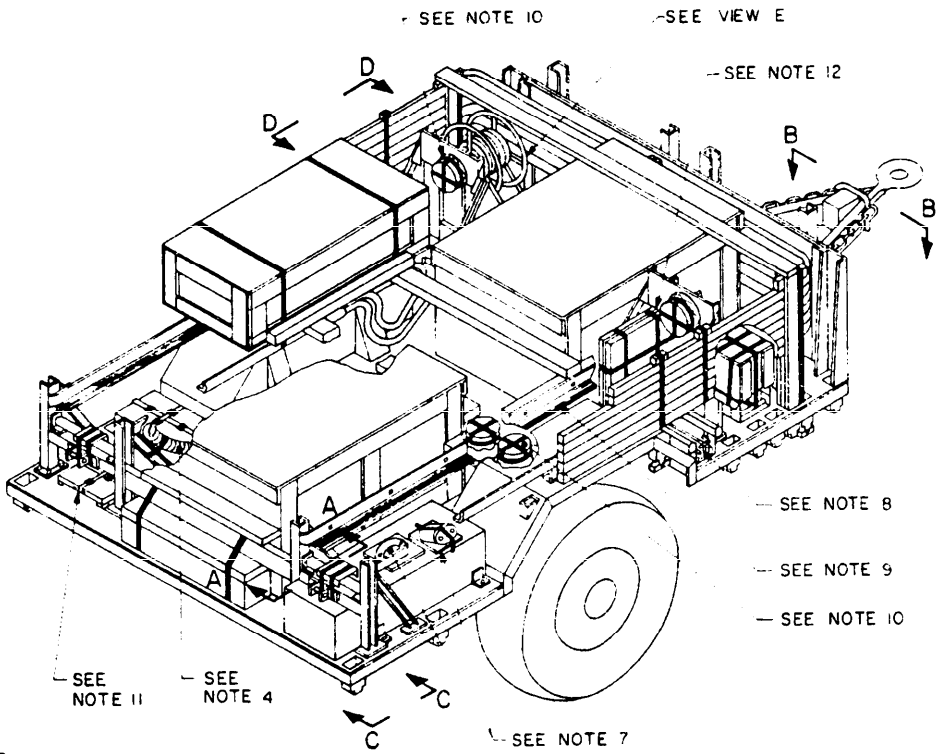

NOTES:

1. SEE TABLE I FOR LIST OF MATERIAL.
2. SEE FIGURE 3 FOR VIEWS
3. HAMMER, FUEL DRUM ADAPTERS, EXTENSION, FUEL LINES AND CLAMPS, AND FIRE EXTINGUISHER, SHALL BE SECURED TO THE GENERATOR SETS USING TAPE, FIND NO. 13
4. EXHAUST TUBES SHALL BE DISCONNECTED AT GENERATOR, LOOSE ENDS WRAPPED IN PLASTIC FILM, FIND NO 6, AND THEN TAPED TO THE NEAREST STATIONARY MEMBER, USING TAPE, FIND NO 14
5. ALL HAND KNOBS, THREADED FASTENERS, AND WING NUTS, SHALL BE HAND TIGHT
6. DISTRIBUTION BOX POWER CABLES, AND GROUND WIRES SHALL BE DISCONNECTED AT GENERATORS AND MATCH MARKED, ENDS SHALL BE WRAPPED IN PLASTIC FILM, FIND NO 6 AND TAPED TO RACKS UNDER THE TARPAULIN BOX, FIND NO 5, USING FIND NO 14
7. FUEL TANK DIAL FACE AND FUEL LINE ELBOWS SHALL BE COMPLETELY COVERED BY TAPE, FIND NO 14, FILLER CAP SHALL BE SECURED USING TAPE, FIND NO 14
8. RACK TIE DOWNS SHALL BE SECURED USING TAPE, FIND NO 14.
9. NYLON RUNNERS ON RACKS TO BE COMPLETELY COVERED BY TAPE, FIND NO 14
10. CONTAINERS SHALL BE COMPLETELY COVERED WITH PLASTIC FILM, FIND NO 6, TAPED IN POSITION BY TAPE, FIND NO 14
11. ALL PLATFORM STRAP ENDS SHALL BE SECURED WITH TAPE, FIND NO 14
12. BOTH PLATFORMS BETWEEN GENERATORS SHALL BE REMOVED AND SECURED TO RACK USING STRAPPING, FIND NO. 12.
13. GENERATOR OIL DRAIN HOSE AND FITTINGS, GROUND ROD CLAMPS AND CABLE SHALL BE STORED WITHIN ACCESSORY BOX.

FIGURE 1. Packaging arrangement and detail (assembled).

X-1260B

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:27Z
Check the source to verify that this is the current version before use.


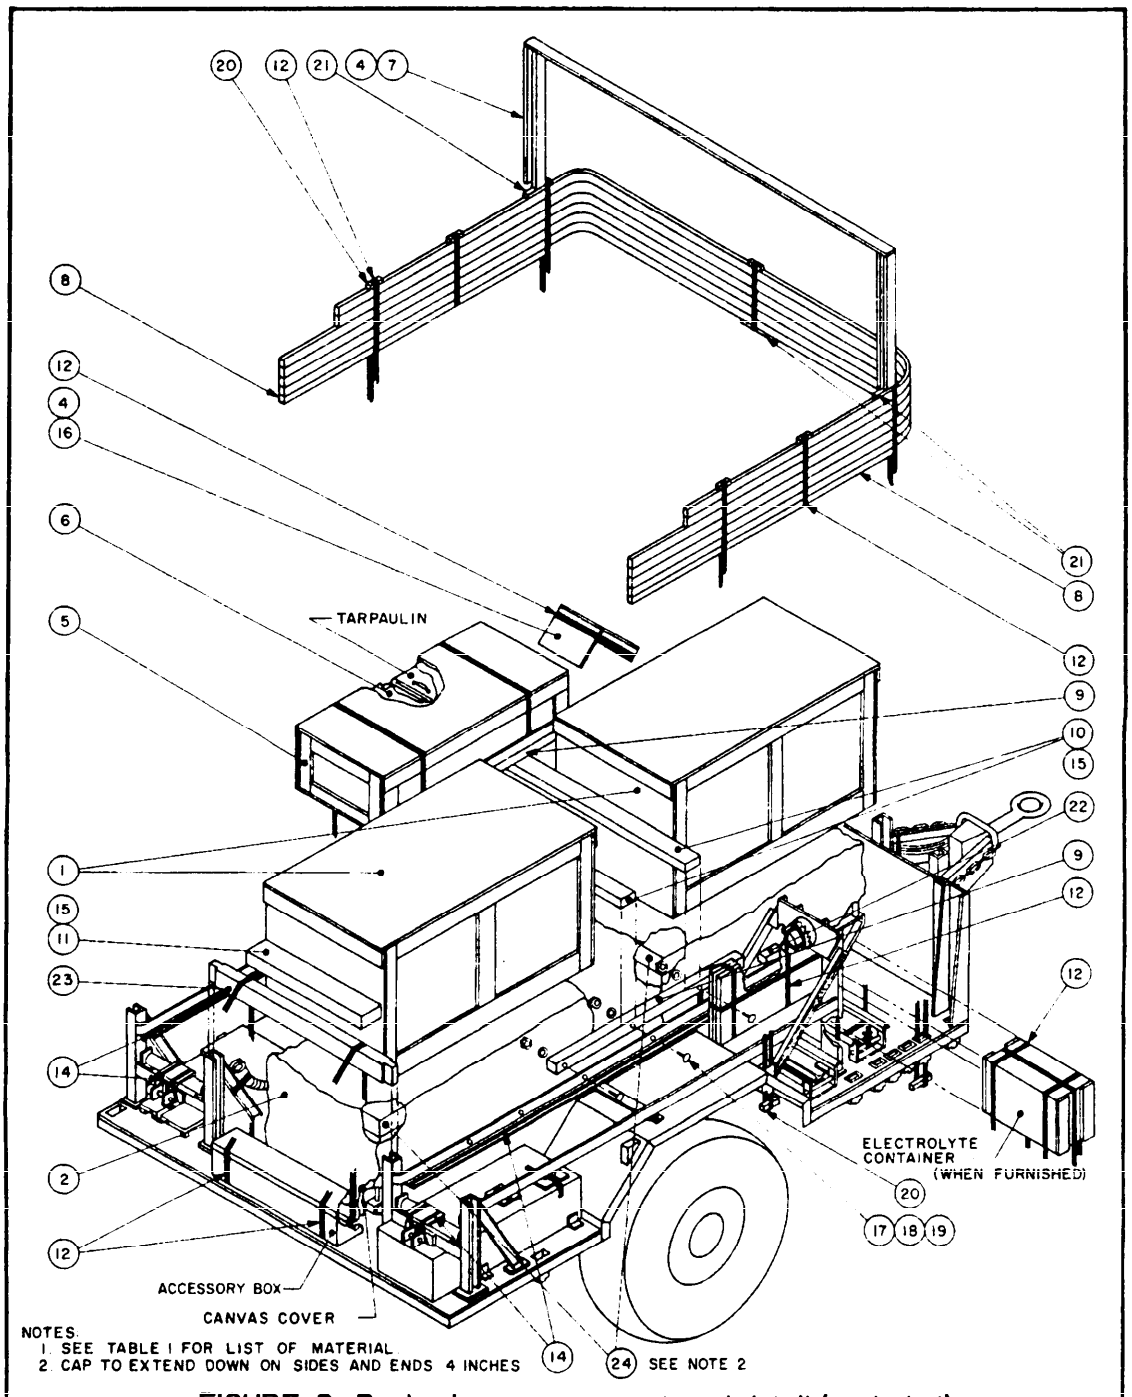


FIGURE 2. Packaging arrangement and detail (exploded).

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:27Z
Check the source to verify that this is the current version before use.

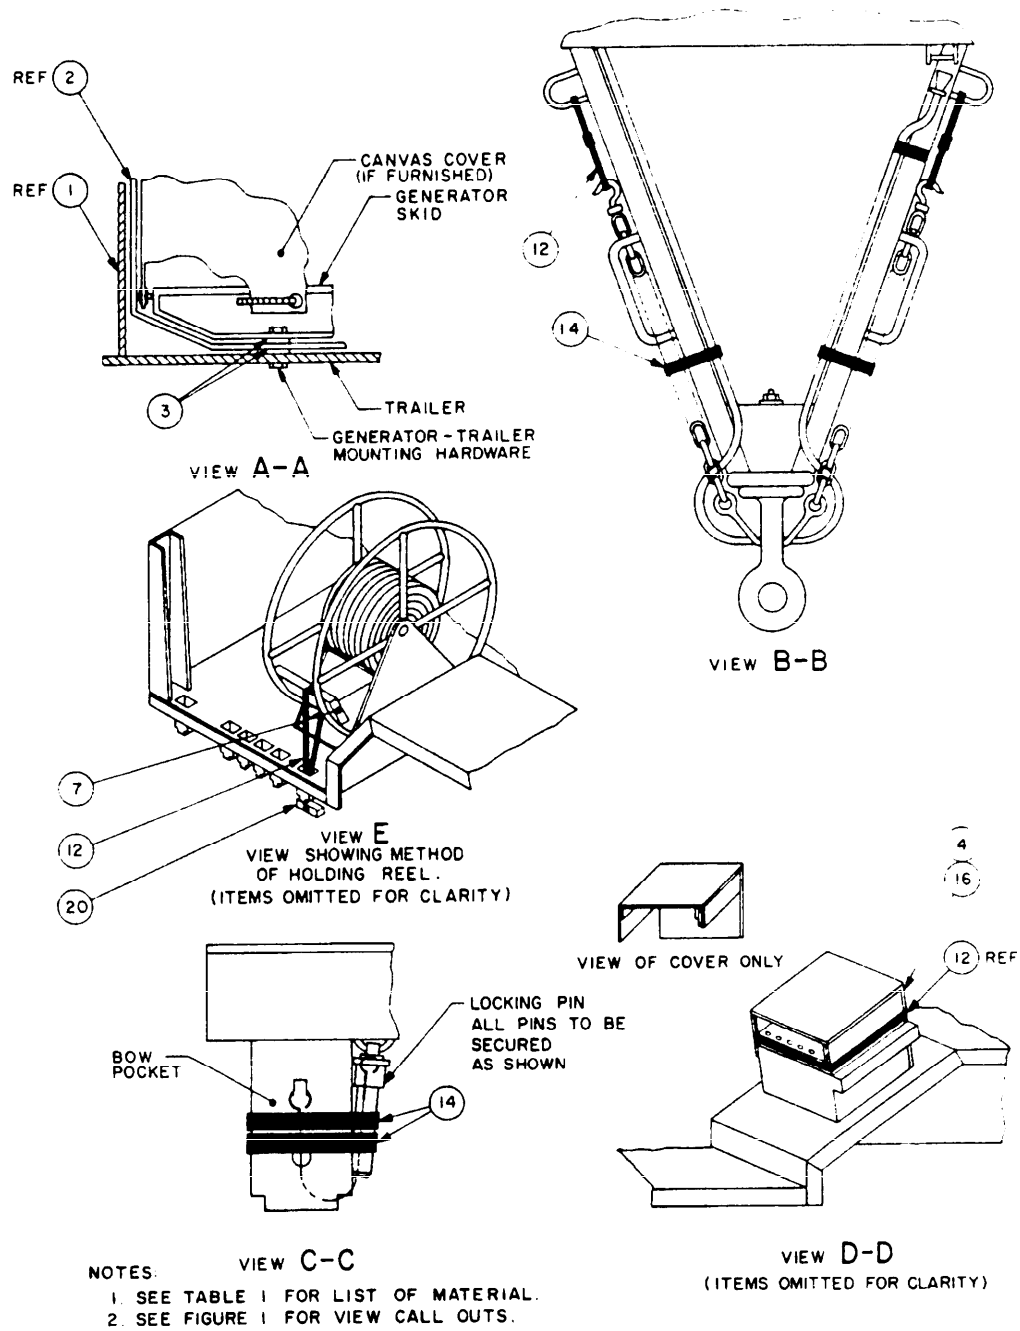

NOTES:
1. SEE TABLE I FOR LIST OF MATERIAL.
2. SEE FIGURE 1 FOR VIEW CALL OUTS.

FIGURE 3. Packaging arrangement and detail (views).

X-1261B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.