MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY, MEMORY

This specification is approved for use by the US Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 scope. This specification establishes the requirements for manufacture and acceptance of the Memory Circuit Card Assembly: 9379230-1, used in the Mortar Ballistics Computer (MBC): M23. Throughout this specification this assembly is referenced as "Memory".

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	-	Fire Control Materiel; General Specification Governing the Manufacture and Inspection
MIL-I-45607	-	Inspection Equipment. Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn: AMSMC-QA, Dover, New Jersey 07801-5001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-01-23T03:36:37Z
Check the source to verify that this is the current version before use.

MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-454	-	Electronic Equipment, General Requirements for
MIL-STD-1521	-	Technical Reviews and Audits for Systems, Equipments, and Computer Programs
MIL-STD-45662	-	Calibration System Requirements

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal.

DRAWINGS

9379230-1	-	Circuit Card Assembly, Memory
11785850	-	Computer Set, Ballistics, Mortar: M2

PACKAGING DATA SHEET

9379230-1	-	Packaging of Circuit Card Assembly, Memory: 9379230-1

(Copies of drawings and packaging data sheets required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of Precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Item definition. The memory circuit card assembly provides the Mortar Ballistic Computer (MBC) with 14 336 8-bit words of random access memory (RAM), 131 072 8-bit words of erasable programmable read only memory (EPROM), and the RAM standby control circuitry. The EPROM is organized into 4 lower banks of 16 384 8-bit words each located functionally between hexidecimal addressees 4000 and 7FFF, and 4 upper banks located functionally between hexadecimal addressees 8000 and BFFF. Be for programming or reading from EPROM, 1 upper bank and 1 lower bank must be enabled. The memory organization and major hardware functions are shown in Figure 1 and Figure 2. The connector contacts are listed in Table 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

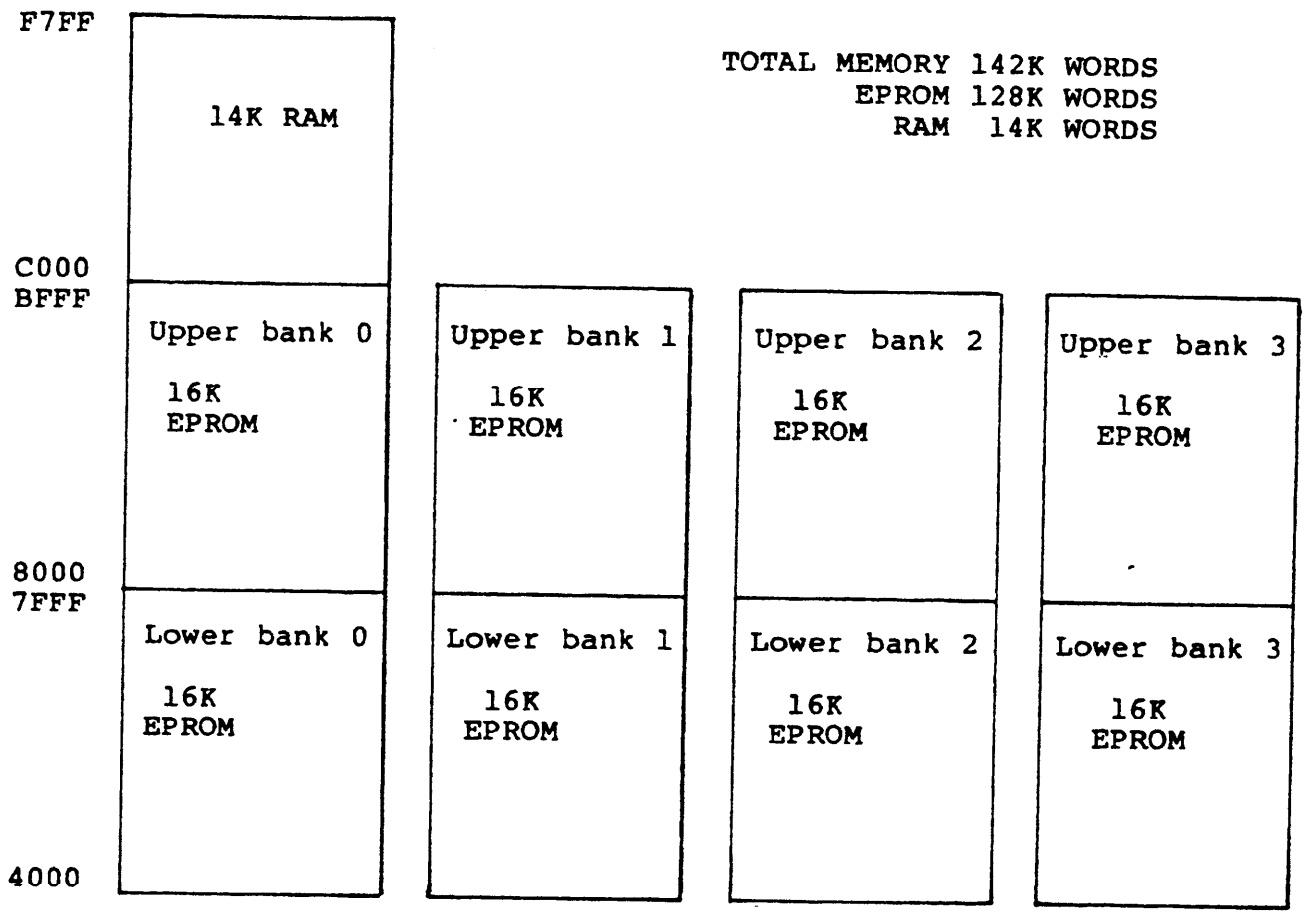


FIGURE 1. Memory organization.

NOTE: 1k is equal to 1024.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

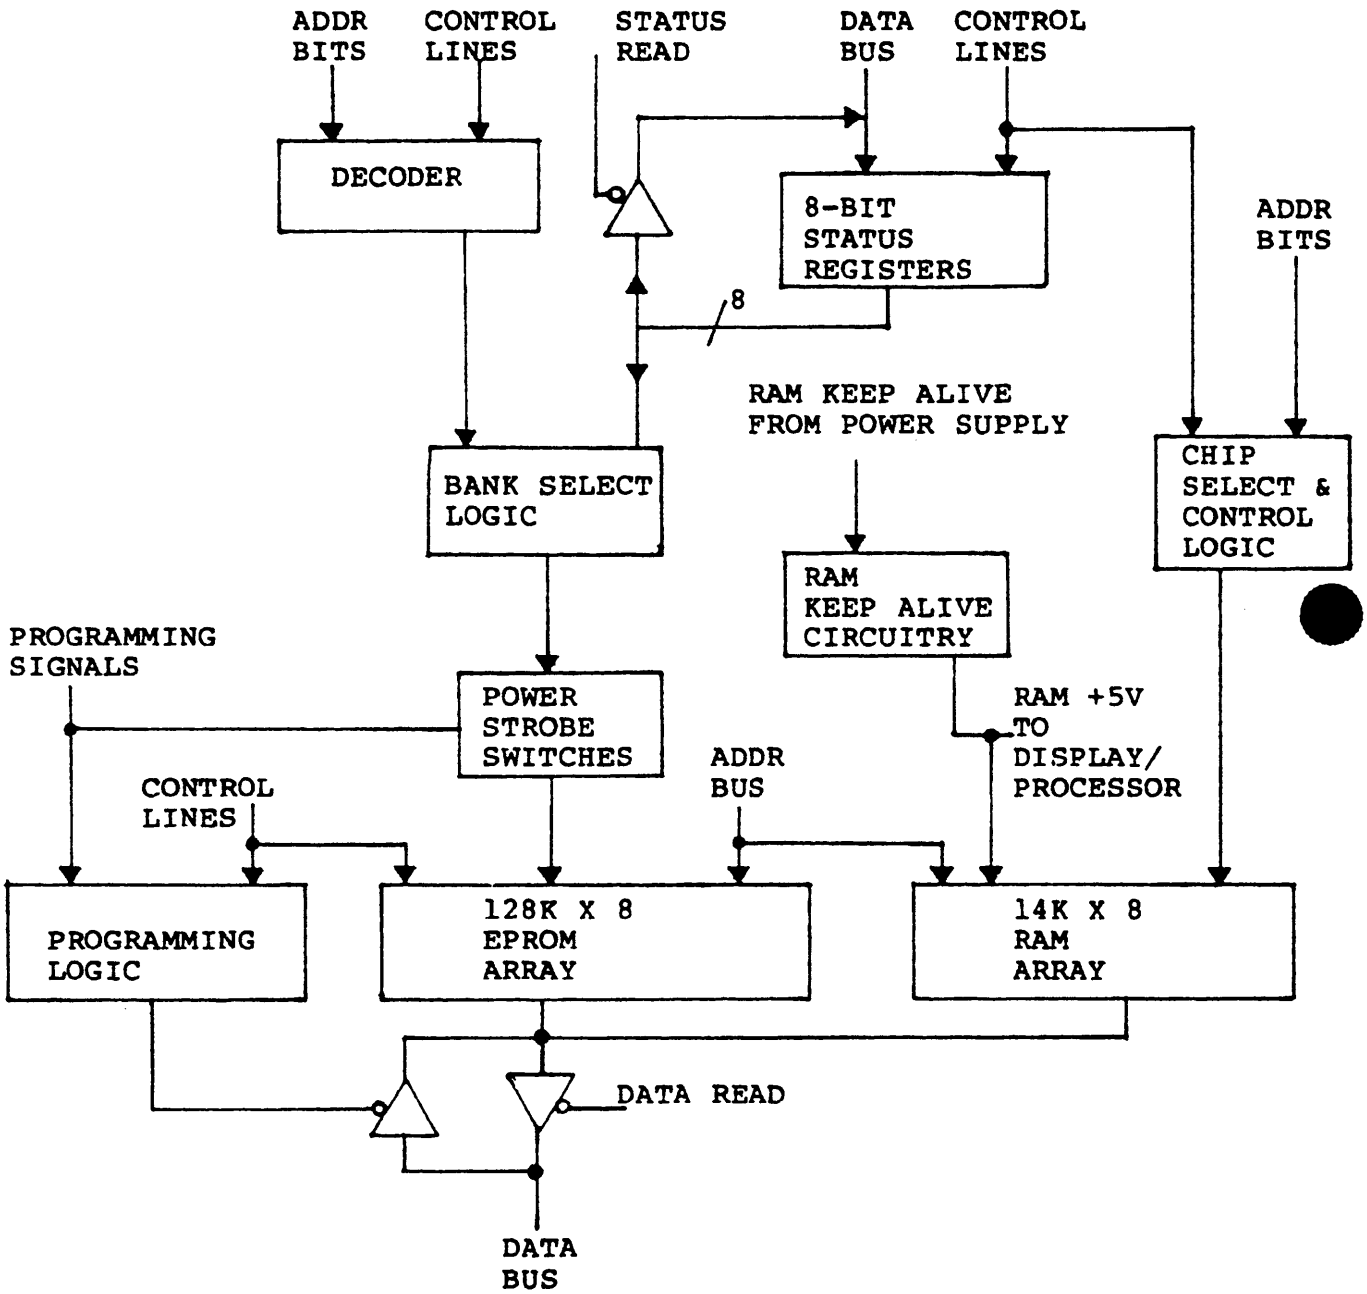


FIGURE 2. Memory assembly block diagram.

NOTE: 1K is equal to 1024.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

TABLE I. Memory circuit card assembly connector contacts.

Connector	Pin	Signal Name	Pin	Signal Name
P1		+5V	B1	GND
P1	A2	ABOO	B2	DBO
P1	A3	ABol	B3	DB1
P1	A4	AB02	B4	DB 2
P1	A5	AB03	B5	DB 3
Pl	A6	AB04	B6	DB4
P1	A7	AB05	B7	DB 5
P1	A8	AB06	B8	DB6
P1	A9	AB07	B9	DB7
P1	Al	AB08	B10	RD*
P1	All	AB09	Bll	WT*
Pl	A12	AB1O	B12	I0/M*
Pl	Al 3	ABll	B13	
P1	A14	AB12	B14	
P1	Al 5	AB13	B15	Spare
P1	A16	AB14	B16	LE
P1	Al 7	AB15	B17	
Pl	A18	+5V	B18	GND
P1	A19	Spare	B19	
P1	A20	Spare	B20	Spare
P1	AZ 1	Spare	B21	Spare
P1	A22	Spare	B22	BAT+5V
P1	A23	Spare	B23	RAM+5V
P1	A24	Spare	B24	Spare
PI	A25		B25	
P1	A26	Spare	B26	Spare
P1	A27	Spare	B27	Spare
P1	AZ 8	Spare	B28	Spare
P1	A29	Spare	B29	Spare
P1	A30	Spare	B30	Spare
PI	A31	Spare	B31	Spare
P1	A32	Spare	B32	Spare
P1	A33	EPROM+5V	B33	GND
P1	A34	Spare	B34	Spare
P1	A35	Spare	B35	Spare
P1	A36	Sensel	B36	Spare
P1	A37	Sense2	B37	Spare
P1	A38	PGM*	B38	Spare
P1	A39	VPPLO	B39	Spare
P1	A40	VPPHO	B40	Spare
P1	A41	VPPL1	B41	Spare
P1	A42	VPPH1	B42	Spare
P1	A43	VPPL2	B43	Spare
P1	A44	VPPH2	B44	Spare
P1	A45	VPPL3	B45	Spare
P1	A46	VPPH3	B46	Spare

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

TABLE I. Memory circuit card assembly connector contacts.-Continued

P1	A47	VPPL4	B47	Spare
P1	A48	VPPH4	B48	Spare
P1	A49	Spare	B49	Spare
P1	A50		B50	GND

3.2 Performance.

3.2.1 General. The performance of the memorv circuit card assembly shall be in accordance with the following requirements.

3.2.1.1 Memory read cycle. A memory read cycle from either RAM or EPROM shall be accomplished by applying the signals specified in Figure 3 and Table I.

3.2.1.2 RAM write cycle. A RAM write cycle shall be accomplished by applying the signals specified in Figure 4 and Table I.

3.2.1.3 EPROM program cycle. An EPROM program cycle shall be accomplished by applying the signals specified in Figure 5 and Table I.

3.2.1.4 EPROM erasure. The EPROM shall be considered to be erased when hexadecimal memory locatiOns (4000) to (7FFF) in all four lower banks and (8000) to (BFFF) in all four lower banks contain data (FF).

3.2.1.5 RAM standby circuitry The voltage at P1-B23 (RAM+5V) shall switch to .1 plus or minus .1 volts DC with respect to P1-Bl (GND) when the voltage at P1-B22 (BAT+5V) decreases to 3.5 plus or minus .5 volts DC with respect to GND.


3.2.1.6 Common connector contact continuity. The resistance between the following respective connector contacts shall be less than 7.5 ohms:

P1-A18 to P1-A1
P1-B18 to P1-B1
P1-B33 to P1-B1
P1-B50 to P1-B1

3.2.1.7 Pullup resistor. The resistance between P1-A38 and P1-A1 shall be 10 kilohms plus or minus 500 ohms.

3.2.2 Physical characteristics. The physical characteristics shall be as prescribed by the drawings, specifications, and QAP's.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

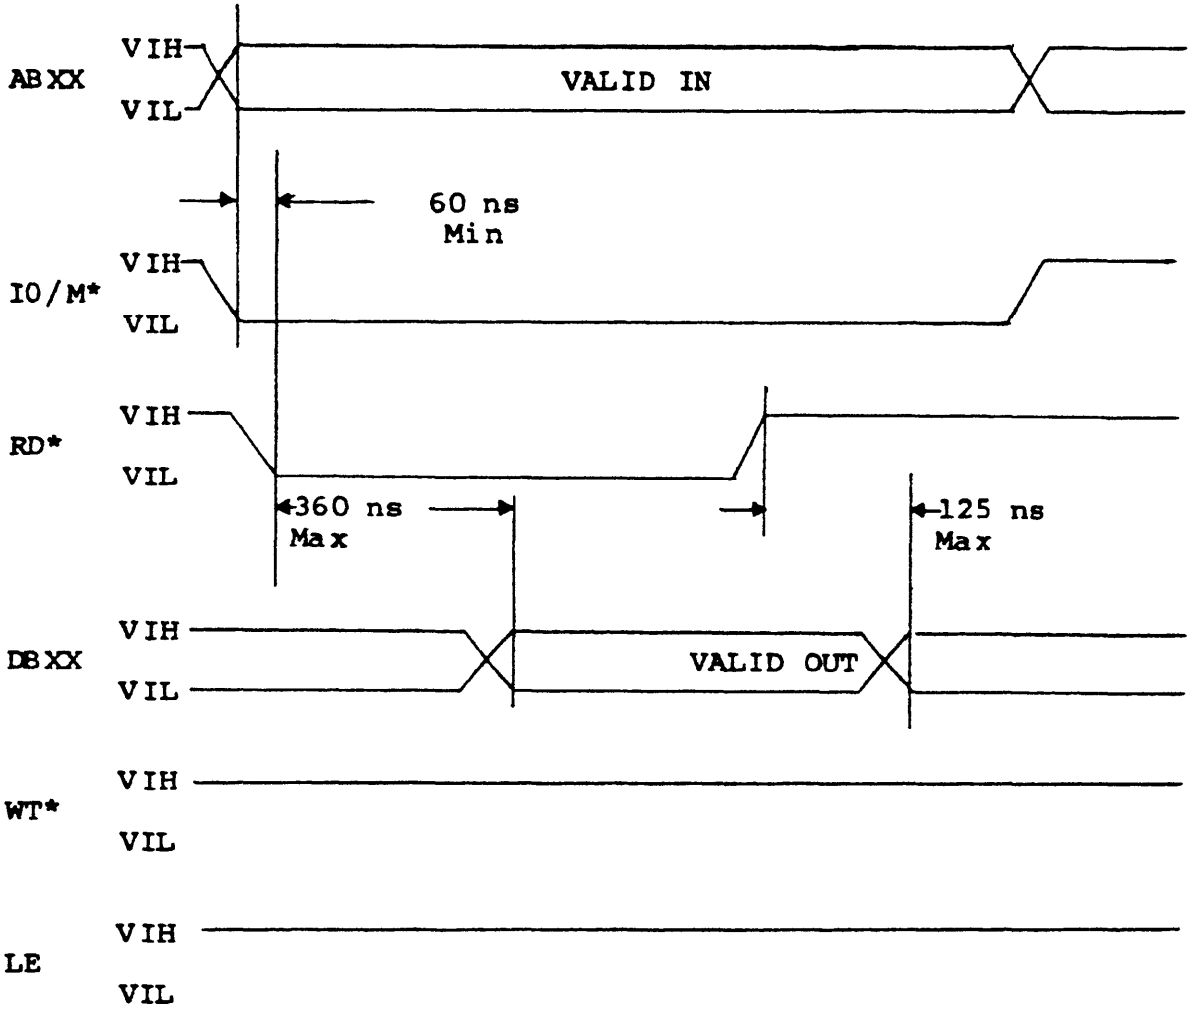

VIL AND VOL ARE 0.5 ± 0.5 VOLTS DC
VIH AND VOH ARE 4.6 ± 0.7 VOLTS DC

FIGURE 3. Memory read cycle.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

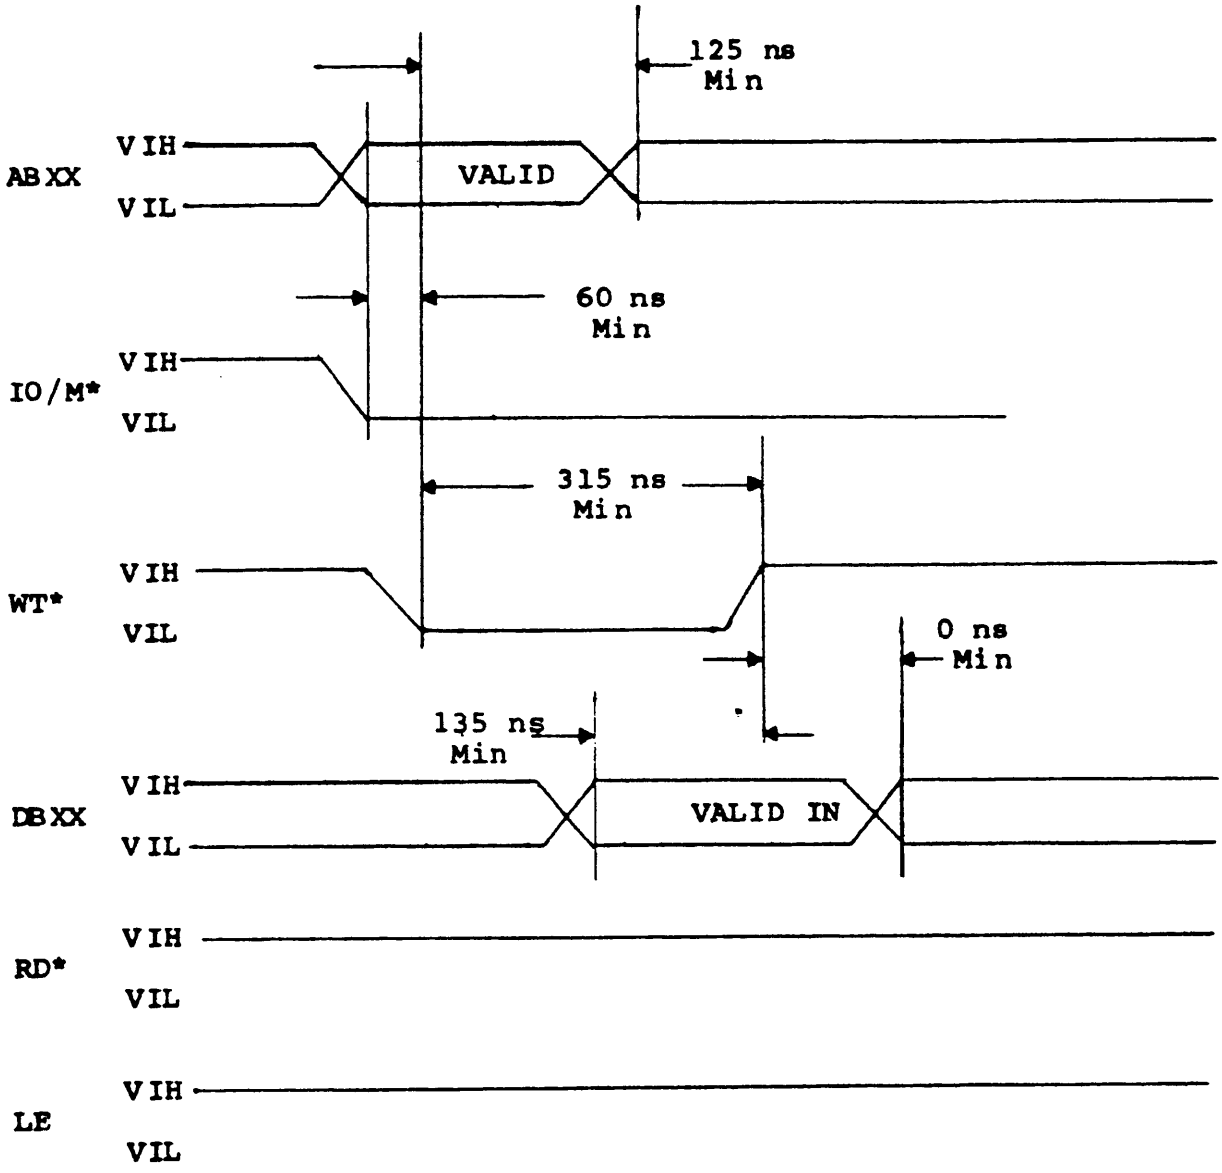

VIL AND VOL ARE 0.5 ± 0.5 VOLTS DC
VIH AND VOH ARE 4.6 ± 0.7 VOLTS DC

FIGURE 4. Ram write cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

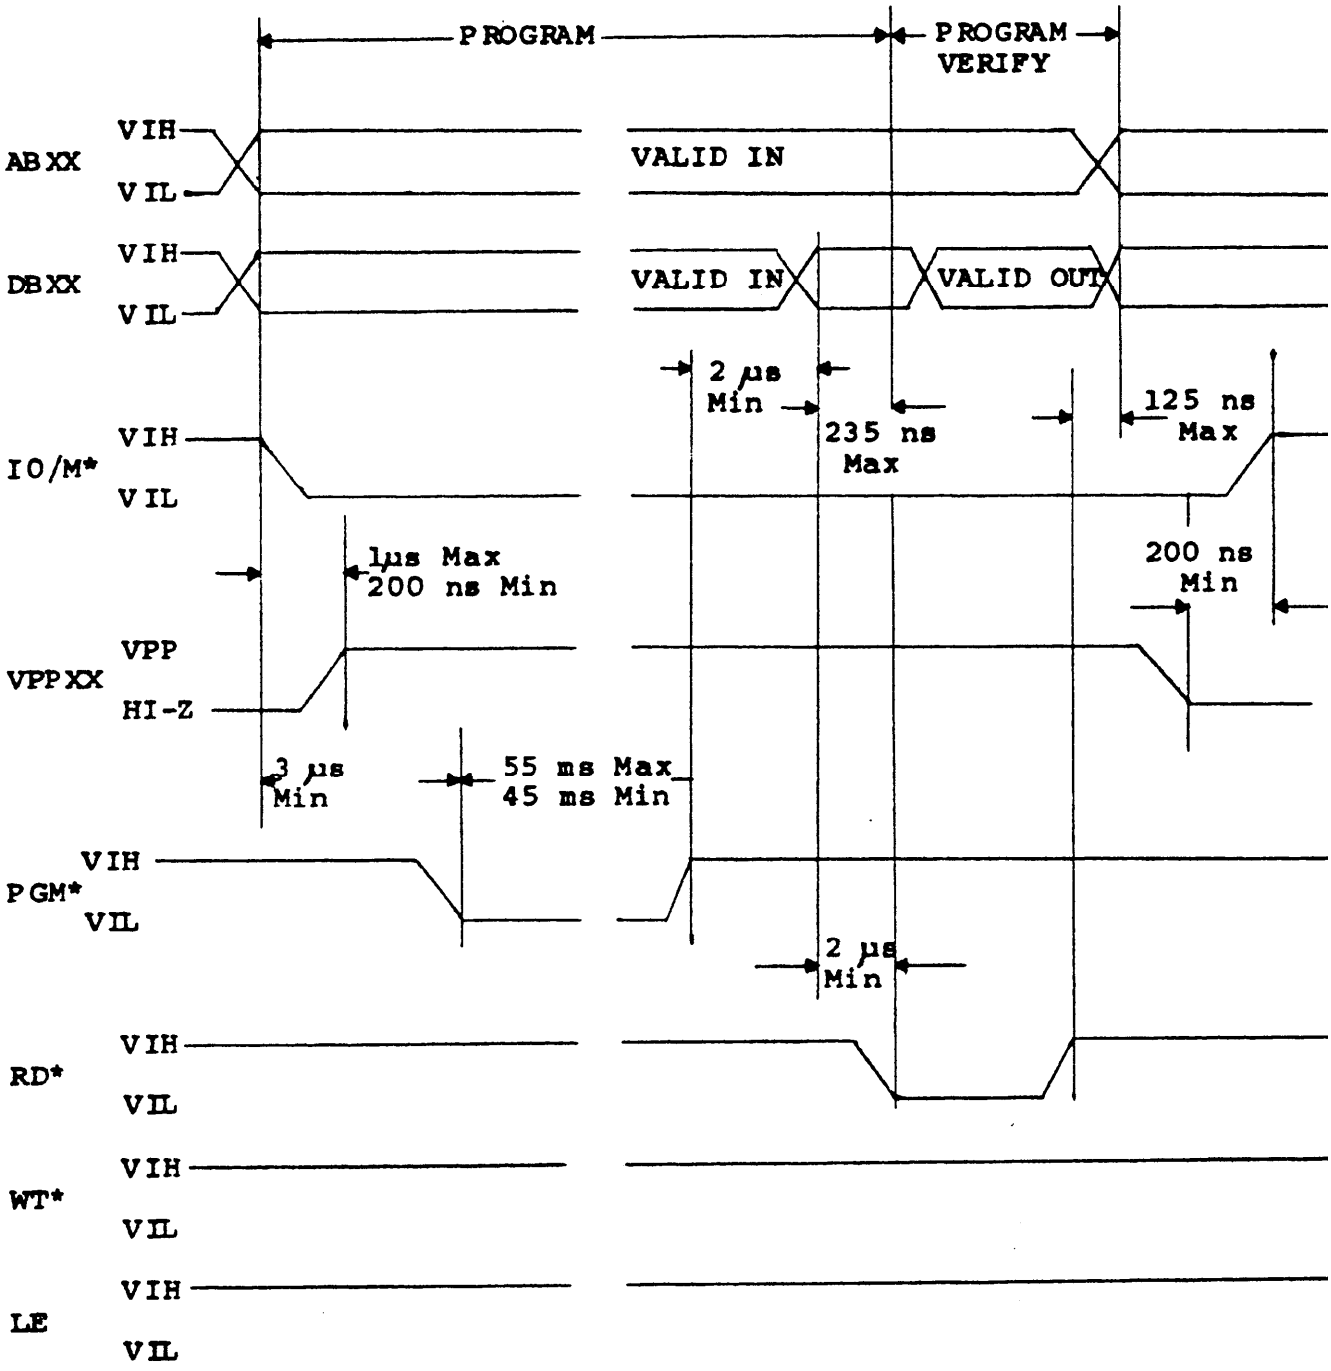

VIL AND VOL ARE 0.5 ± 0.5 VOLTS DC
VIH AND VOH ARE 4.6 ± 0.7 VOLTS DC

FIGURE 5. EPROM program cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

3.2.3 Reliability. When specified in the contract, a special sample shall be subjected to reliability testing. The manufacturing and production techniques emloyed in the fabrication of the memory shall not degrade the inherent reliability. The inherent reliability shall not be less than 77,534 hours Mean Time Between Failures (MTBF). (See 4 and 6)

3.3 Environmental. The memory shall meet the requirements specified herein unless otherwise specified.

3.3.1 Room ambient temperature. The requirements of this specification shall be met with the memory thermally stabilized at room ambient temperature of +16°c to +32°C (+60°F to +90°F), unless otherwise specified in the requirements paragraph.

3.3.2 Environmental stress screen (ESS) temperature. The memory shall meet the requirements of 3.2.1.1 and 3.2.1.7 inclusive, after having been exposed to a minimum of ten temperature cycles at temperatures Of -57°C and +71°C (-71°F and +160°F).

3.3.3 Environmental stress screen (ESS) vibration. The memory shall meet the requirements of 3.2.1.1 and 3.2.1.7 inclusive, after having been subjected to a random or pseudorandom vibration which includes frequency content from 100 Hz to 1000 Hz and up to a 39 RMS in two axis for a period of 10 minutes plus or minus 15 seconds.

3.4 Fabrication. The memory shall be manufactured in accordance with drawing 9379230-1.

3.5 First article. When specified in the contract, a sample shall be subjected to first article inspection (See 4 and 6).

3.6 Workmanship. The workmanship requirements of MIL-F-13926 and MIL-STD-454 shall be met.All components shall be fitted properly and firmly in their respective positions. All electrical connections shall be mechanically secure and electrically sound. There shall be no evidence of corrosion, burrs, roughness, sharp edges or other defects which could adversely affect its use or suitability for the purpose intended.

3.7 Materials. Materials shall be in accordance with drawings, material specifications and general specifications forming a part of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsobility for inspection. Unless otherwise specified In the contract or purchase order the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 and MIL-STD-454 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval. The requirement for first article approval and the reponsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval test shall consist of three (3) memory plus three (3) each of all items covered by QAP. The three memory's shall be tested as specified herein for all the requirements of this specification. The items covered by QAP shall be tested, as specified thereon, for all characteristics delineated on the QAP. The samples shall be manufactured in the same manner, using the same materials, equipment, processes, and procedures as will be used in the production of the balance of the contract quantity. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as will be used in the production of the balance of the contract quantity.

4.2.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor prior to submitting-the sample to the Government, shall inspect the sample to insure that it conforms to all requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for all materials.

4.2.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for all materials, shall be submitted to the Government for approval. The Government reserves the right to witness any or all of the contractor's inspections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

4.3 Inspection provisions.

4.3.1 Submission of product. Unless otherwise specified by the contracting officer, inspection lot size, lot formation, and presentation of lots shall be in accordance with "Submission of Product" provision of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Quality Assurance Provisions (QAP's) listed in the Technical Data Package (TDP). In the absence of QAP's, the applicable Quality Assurance Provisions of MIL-F-13926 shall apply.

4.4 Sampling.

4.4.1 Environmental/performance. The memory shall be inspected to the requirements in Table II.

TABLE II. Classification of defects.

No.	Characteristics	Requirement	Test procedure
100% Inspection			
1.	Memory read cycle	3.2.1.1	4.6.3
2.	RAM write cycle	3.2.1.2	4.6.4
3.	EPROM program cycle	3.2.1.3	4.6.5
4.	EPROM erasure	3.2.1.4	4.6.6
5.	RAM standby circuitry	3.2.1.5	4.6.7
6.	Common connector contact continuity	3.2.1.6	4.6.8
7.	Pullup resistor	3.2.1.7	4.6.9
8.	ESS temperature	3.3.2	4.6.1
9.	ESS vibration	3.3.3	4.6.2
MAJOR: AQL 1.0% Defective			
101.	Workmanship	3.6	4.6.10

4.4.2 Special sampling. One memory shall be selected at random as a special sample from each lot or each 100 produced which ever occurs first. The sample shall meet the requirements and tests in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects.

NO.	Characteristics	Requirement	Test Procedure
201.	Fabrication	3.4	Applicable Drawing/ Visual
202.	Materials	3.7	Applicable Drawing/ Visual

NOTE: The tests in Table III shall be conducted at room ambient temperature (as specified in 3.3.1).

4.4.3 Failure of sample. Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the represented inspection lot will be suspended by the Government until necessary corrections have been made by the contractor and resubmitted items have been approved in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment. Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design. All inspection equipment specified by drawing number in specification or QAP forming a part of the contract shall be supplied by the contractor in accordance with technical data included in the Technical Data Package List (TDPL).

4.5.2.2 Contractor design. In the absence of Government inspection equipment design, the contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in"Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit, Thus, concept, construction, materials, dimensions, and tolerance used in the design of test equipment shall be so selected and controlled as to insure that

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Inspection equipment design requirements.

4.5.2.3.1 Temperature testing. The volume of the test chamber shall conform to the test facilities requirements of MIL-F-13926. The air temperature at the control sensor shall be in accordance with the specified requirements within plus or minus 2.5°F (1.4°C. The temperature gradient across the cross-sectional area occupied by the test item shall not exceed 0.5°F per foot in any direction. The heat source of the test chamber shall be so located that radient heat, if used, will not fall directly on the test item. Thermocouples or equivalent temperature sensors utilized to determine or control the specified chamber temperature shall be centrally located within the test chamber within the supply airstream, or in the return airstream, whichever provides the specified test condition at the item under test and shall be baffled or otherwise protected against radiation effects.

4.5.2.3.2 Fabrication, setup and calibration. Design and fabrication of test equipment shall be such that it incorporates the features of rigidity, stability, and ease of maintenance. Setup and calibration equipment necessary for certification of the testing equipment accuracy shall be furnished and will become a part of the testing equipment. Operating and calibration instruction shall be prepared and submitted to the procuring activity.

4.6 Test methods and procedures. Unless otherwise specified in the contract, the following procedures shall be utilized to conduct specified tests. If the contractor chooses to use alternate test procedures, a detailed description of the set-up and procedure shall be submitted to the government procuring agency for approval prior to use.

4.6.1 ESS temperature. Testing equipment utilized in this test shall conform to the requirements of 4.5.2.3.1. The memory shall be placed in the test chamber and the temperature of the chamber reduced, 10°C (18°F) per minute plus or minus 1°C (1.8°F) from room ambient temperature (as specified in 3.3.1) to -57°C (-71°F). The memory shall be maintained at this temperature for a minimum of 20 minutes. Upon completion of the 20 minute exposure, the temperature of the chamber shall be raised 10°C (18°F) per minute plus or minus 1°C {1.8°F) to

for a minimum of 20 minutes. Upon completion of the 20 minute

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

exposure the temperature of the chamber shall be reduced 10°C (18°F) per minute plus or minus 1°C (1.8°F) to room ambient temperature (as specified in 3.3.1). The above procedure shall be conducted a minimum of ten times. Upon completion of the cycles the memory shall then be removed from the chamber and subjected to the tests in 4.6.3 and 4.6.9 inclusive. It shall meet the requirements of 3.2.1.1 and 3.2.1.7 inclusive.

4.6.2 ESS vibration. Conduct the vibration test with the memory positioned on an appropriate adapter affixed to a vibrating machine that is capable of providing the amplitudes and frequencies specified in 3.3.3. Unless otherwise specified, the test equipment shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The applied motion shall be in two separate planes for the time period specified. Upon completion of the vibration sweep the memory shall be removed from the vibration adapter and shall be subjected to the tests in 4.6.3 and 4.6.9 inclusive. It shall meet the requirements of 3.2.1.1 and 3.2.1.7 inclusive.

4.6.3 Memory read cycle. Tests 4.6.3 and 4.6.4 shall be performed by first connecting the following connector contacts together and then applying a 5.3 plus or minus .1 volt DC power supply to P1-A1 (+5V) , P1-A18 (+5V), and P1-A33 (EPROM +5V) , all with respect to P1-131 (GND). Before reading from EPROM, 1 upper bank and 1 lower bank shall be enabled by loading registers U36 and u37 with the following data. Verify the data in EPROM by using the memory read cycle described in 3.2.1.1. The data shall be verified from hexadecimal address (4000) to address (BFFF) for each of the 4 banks.

Upper Bank	Register U37
0	0000
1	0001
2	0010
3	0011

Lower Bank	Register U36 Data
0	0000
1	0001
2	0010
3	0011

4.6.4 RAM write cycle.

a. Write to RAM with hexadecimal data (01) using the RAM write cycle specified in 3.2.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

b. Verify the data written to RAM is correct by reading data from RAM using the memory read cycle described in 3.2.1.1.

c. Rotate to the right by 1 bit the data in the memory location being tested and reverify the data for each rotation.

d. Data shall be written as in a. thru c. to the full range of RAM from hexadecimal address (COOO) to address (F7FF).

e. Write to the full range of RAM from hexadecimal address (C000) to address (F7FF) with hexidecimal data (00) using the RAM write cycle specified in 3.2.1.2.

f. Write to the RAM location being tested with hexadecimal data (FF) using the RAM write cycle specified in 3.2.1.2.

g. -Verify that all RAM addresses that differ from the test address by 1 bit contain hexadecimal data (00) by using the memory read cycle described in 3.2.1.1.

h. Data shall be written as in e. thru g. to the full range of RAM from hexadecimal address (C000) to address (F7FF).

4.6.5 EPROM program cycle. Before programming EPROM, 1 upper bank and 1 lower bank shall be enabled by loading registers U36 and U37 with the data specified in 4.6.3. An EPROM program cycle shall be accomplished by applying the signals specified in 3.2.1.3. The VPP connector contact for each bank is listed below and shall have the following input specifications:

Parameter	Conditions	Minimum	Max imum	Units
High voltage	1 in=30mA max	20.5	21.5	volts DC
Low voltage	Open circuit			

Upper Bank	VPP Connector Contact
0	P1-A40
1	P1-A42
2	P1-A44
3	P1-A46

Lower Bank	VPP Connector Contact
0	P1-A39
1	P1-A41
2	P1-A43
3	P1-A45

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

4.6.6 EPROM erasure. The EPROM shall be erased by exposing the transparent window to high intensity ultraviolet light. A light source with a wavelength of 2537 Angstroms yielding a minimum integrated dosage of 15 w-sec/cm(2) is required. An ultraviolet 'light source with a power of 12,O00 microwatts/cm(2) placed within 1 inch of the window will erase the EPROM in 20 minutes. The EPROM shall be erased when requirement 3.2.1.4 is met.

4.6.7 RAM standby circuitry. Connect a 5 volt variable DC power supply to P1-B22 (BAT+5V) with respect to GND. Then disconnect P1-A1 (+5V) from the 5 volt power supply. slowly decrease the voltage of the variable power supply while at the same time monitoring with a DC voltmeter the voltage at P1-B23 (RAM + 5V. The output response shall be as specified in 3.2.1.5.

4.6.8 Common connector contact continuity. With no external power connected to the memory circuit card assembly, measure with an ohm meter the resistance between the following connector contacts. All measured resistances shall be as specified in 3.2.1.6.

P1-A18	to	P1-A1
P1-B18	to	P1-B1
P1-B33	to	P1-B1
P1-B50	to	P1-B1

4.6.9 Pullup resistor. With no external power connected to the memory circuit card assembly, measure with an ohm meter the resistance between P1-A38 and P1-A1. The resistance shall be as specified in 3.2.1.7.

4.6.10 Workmanship. "The memory shall be subjected to a visual and tactile examination for evidence of faulty workmanship. The assembly shall conform to the requirements of 3.6.

4.7 Reliability testing. "The requirement for reliability test approval and the responsibility (Government or contractor) for reliability testing shall be as specified in the contract. The sample for reliability test shall consist of 3 memory's. The samples shall be manufactured in the same manner, using the same materials, equipment processes, and procedures as will be used in the production of the balance of the contract quantity. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as will be used in the production of the balance of the contract quantity.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T03:34Z
Check the source to verify that this is the currenversion before use.

4.7.1 Government testing. When the Government is responsible for conducting reliability tests, the contractor prior to submitting the sample to the Government, shall inspect the sample to assure that it conforms to a11 requirements of the contract and submit a record of this inspection with the sample inluding certificates of conformance for all materials.

4.7.2 Contractor testing. When the contractor is responsible for conducting reliability tests, the sample shall be inspected and tested by the contractor for all the requirements of the contract. The sample and a record of these inspections and tests, including certificates of conformance for all materials, submitted to the Government for approval. The Government reserves the right to witness any or all of the contractors reliability tests and inspections.

5. PREPARATION FOR DELIVERY

5.1 Delivery requirements. Handling, packaging packing, shipping, and marking of the memory circuit card assembly, 9379230-1 shall be in accordance with Packing Data Sheet 9379230-1. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use. The memory described herein is intended for use in the MBC. See drawing 11785850.

6.2 Ordering data. Procurement document shall specify the following:

a. Title, number and date of this specification.

b. Provisions for first article testing.

c. Provisions for reliability testing.

d. Applicable Packaging Data Sheet.

e. Applicable levels of preservation packing, and marking (see 5.1).

f. Applicable stock numbers.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1220-A298)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament Munitions &
Chemical Command
ATTN: AMSMC-QA
Dover, NJ 07801-5001

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-70490 (AR)	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil – Downloaded: 2026-01-25 05:54Z
Check the source to verify that this is the current version before use.