MILITARY SPECIFICATION
TRAINER, FIELD ARTILLERY:
M735 FUZE NOSE SECTION, TYPE X

This specification is approved for use by USA Armament Research and Development Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

This specification covers the requirements and test limits for the Type X M735 Fuze Nose Section. The Type X nose section is to be used with the XM754 Trainer projectile which is a part of the M753 8-inch Nuclear Projectile weapon system. The Type X nose section is identical to the M735 Fuze Nose Section (See MIL-F-48703) with the exceptions that the reserve power supplies are replaced by a mass mockup and there is an extra interface pin to prohibit mating with a fuze projectile section.

2. APPLICABLE DOCUMENTS.

2.1 Issues of documents. The following documents in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-P-116	Preservation, Methods of
MIL-A-2550	Ammunition and Special Weapons, General Specifications for
MIL-Q-9858	Quality Program Requirements
MIL-F-48703	Fuze, Proximity: M735
MIL-F-48704	Fuze Setter: M38
MIL-Q-50829	General Quality Assurance Provisions for Proximity Fuzes and Related Components

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Table for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-331	Environmental and Performance Tests for Fuzes and Fuze Components
MIL-STD-810	Environmental Test Methods

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, US Army Armament, Munitions and Chemical Command, ATTN: DRSMC-TDA-S(D), Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the current version before use.

DRAWINGS

Harry Diamond Laboratories (FSCM 19202)

DL 11725080	Data List for Type X PN 11725080
EDL 11725080	Inspection Equipment Data List
PDL 11725080	Packaging Data List
11711877	M735 Fuze Solder Specification

PUBLICATIONS

Test Procedures

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

DOD 5220-22M Industrial Security Manual

3. REQUIREMENTS

3.1 Samples. The contractor is responsible for all requirements for providing and testing of samples as prescribed herein. When this specification is assigned to a subcontractor, it shall be the prime contractor's responsibility to insure that sample requirements are met. The prime contractor shall notify the Government at the time of assignment to a subcontractor whether the testing will be performed by the prime or by the subcontractor, as well as the method of control by the prime contractor.

3.1.1 First article approval sample. Prior to the start of regular production, except when production on a new contract at the same facility follows within 90 days production of acceptable material under this specification, the contractor shall manufacture and submit a first article approval sample of four complete Type X Nose Sections using as far as possible the methods and processes proposed for quantity production. When processes differ from the production processes, they shall be basically equivalent and the difference shall be fully described in documentation submitted with the first article sample. The sample shall be tested in accordance with paragraph 4.4.5.2. Additional samples that may be required because of failure of the sample to meet the requirements of this specification shall be supplied by the contractor at his expense. Prior to approval of the first article approval sample, acquisition of parts and materials or initiation of production will be at the sole risk of the contractor.

3.1.2 Supplemental samples. At the Government's discretion, a supplemental sample may be required whenever there is a break in production continuity of 90 days or more, or a change in design, material or process that may affect operability, reliability or interchangeability as defined by the Requirements and Classification of Defects. In all cases, such changes will require prior approval of the procuring activity.

3.1.3 Comparison sample. At least one or more accepted Type X nose section as specified by the procuring agency shall be tested to demonstrate that the first article approval sample requirements continue to be met. (See 6.1.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

3.2 Construction. The device shall be constructed in accordance with the applicable drawings (DL 11725080) to the extent prescribed herein and in accordance with MIL-A-2550.

3.2.1 Materials. Materials shall be those specified by the applicable drawings.

3.2.2 Dimensions and technical notes.

3.2.2.1 Listed. Those dimensions and technical requirements listed in the Classification of Defects are mandatory.

3.2.2.2 Unlisted. The contractor may propose changes to characteristics shown on the drawings but not listed in the Classification of Defects, for the purpose of adapting the item to established manufacturing practices. Such proposals must be accompanied by evidence that the change does not affect the function of the item and that all requirements will be met. If the Government confirms the contention of the contractor, the change will be approved for the duration of the contract. In case of dispute, the characteristics of the drawings shall apply. Approval of a change under provisions of this paragraph does not relieve the contractor from establishing and maintaining an adequate quality assurance program as elsewhere required. Provisions of this paragraph shall not be used to obtain approval for use of discrepant material (i.e., produced before approval is obtained); or for design changes, which should be requested in accordance with change provisions of the contract document.

Note: It is expected that the above changes will normally be accomplished prior to the construction of the First Article Approval Sample and reflected therein.

3.2.2.3 Interchangeability. While the dimensions and tolerances shown in the drawings and specifications will generally insure satisfactory products, the contractor is notified that some selection or matching may be required to obtain combinations which provide proper function or economic use of components. The contractor is responsible for selecting combinations of tolerances within the specified performance and fit requirements.

3.2.2.4 Components. Components with a lower failure rate or closer tolerance on component value may be used in place of those called out on the face of the drawing.

3.3 Performance requirements. The requirements contained herein are mandatory. Any requirements stated in this section, but not explicitly tested for in Section 4.6, are still required to be met.

3.3.1 Operation requirements. Unless otherwise specified, the following operating requirements apply to the assembled Type X Nose Section over the range of voltage, temperature, and environmental conditions specified herein. The nose section shall operate as specified in 3.3.1 when the input and output lines which interface with the M38 setter are terminated with the impedance levels specified in 4.5.2.

3.3.1.1 Time setting.

3.3.1.1.1 Timing range. The Type X time shall be settable and resettable in 0.1s increments over the range from 13.0 to 200.0s in acordance with 4.6.1.3.

3.3.1.1.2 Resettability. The Type X fuze setting shall be resettable a minimum of 1000 times in accordance with 4.6.1.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

3.3.1.2 Accuracy. Accuracy of the Type X set time occurrence shall be ± 0.1 second when set at the test temperature with a properly functioning M38 fuze setter (as specified by MIL-F-48704) and verified on the same setter both in the set/verify mode and interrogate mode.

3.3.1.3 DC current. The total current supplied to the Type X nose section shall not exceed 60 mA.

3.3.1.4 Regulator. The two outputs of the voltage regulator in each memory-timing channel shall be as specified below when the power supply input voltage at J3-N varies over the range of 24.0V min. to 41.5V maximum. The 13.7V outputs in the A and B channels shall each be capable of supplying an additional 25 mA maximum to power logic circuits in the setter which simulate the rear section of the fuze.

3.3.1.4.1 MNOS power. The regulator output for the MNOS logic shall be 20.5 ± 0.5V.

3.3.1.4.2 CMOS power. The regulator output for all CMOS logic shall be 13.7 ± 1.2V.

3.3.1.5 Memory counter output. The MNOS memory counter in each timing channel (A, B, and C) when properly set at the test temperature by the M38 fuze setter shall provide an output at J2-N which changes from a low level not to exceed +1.0V to 13.4 ± 1.5V at (Tset - 12) ± 0.57s. The transition time from low to high level shall be less than 5 ms. Furthermore, when each memory counter output is allowed to release a secondary 120-count test counter which is clocked by the clock signal (3.3.1.12), the output from the secondary counter shall occur at the set time with an accuracy of ± 0.2 second.

3.3.1.6 Erase disable. The MNOS counter in each channel shall not provide an output at J2-N for up to 200s after power application when an erase pulse is applied to the erase/memorize lines at J3-N, prior to or during the timing sequence.

3.3.1.7 Option memory. The type X nose section shall provide option memory set outputs at J2-N from channel A and channel B both of which correspond to the option selected by a properly functioning M38 fuze setter. There shall be no set outputs from either channel which do not correspond to the selected option. The memory set signal from each channel shall be a dc voltage which changes from a low level not to exceed +1.0 to 13.4 ± 1.5V within 10 ms of the time observed for the memory counter outputs (3.3.1.5) in their respective channels.

3.3.1.8 MNOS bias.

3.3.1.8.1 Operating record bias. The bias voltage at which the MNOS counter and option memories are read and operated shall be -4.0 ± 0.4V with respect to MNOS substrate (IC pins 1, 5, 7).

3.3.1.8.2 E/M voltage. The voltage at each of the erase/memorize setter interface lines on J3-N shall be 16.5 ± 0.9V.

3.3.1.8.3 Bias threshold margin. The memory counter outputs (3.3.1.5) and option set outputs (3.3.1.7) shall perform as specified when the MNOS read bias for each channel is externally set to -2.0 ± 0.5V, and also when set to -6.0 ± 0.5V.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the current version before use.

3.3.1.9 Logic reset. All CMOS logic devices located in the nose section timing circuits shall be initially reset and released when the input voltage to the regulator in each channel reaches 19.0 ± 1.5 VDC. Secondary reset, in the event the voltage drops after power-on reset, shall occur when the regulator input voltage reaches 14.0 ± 1.5 VDC. All MNOS circuits shall be reset in the event the regulator input voltage drops to 12.5V or lower after initial power-on release of MNOS circuits.

3.3.1.10 MNOS read delay. The MNOS counter and option memory circuits shall be read and released after the first clock period (3.3.1.12) has elapsed following CMOS reset release (3.3.1.9). All MNOS circuits shall be reset in the event the regulator input voltage drops to 12.5 after initial power-on release.

3.3.1.11 Oscillator frequency. The oscillator frequency in each timing channel shall be 10240 ± 360 Hz. The temperature coefficient of each oscillator shall not exceed 100 ppm/°C over the range of -35°C to +65°C.

3.3.1.12 Clock signal. The scaled and decoded clock signals for each channel at J2-N shall have a frequency of 10 ± 0.35 Hz. The waveform of each clock signal shall be rectangular with a high level duration of 25 ± 1 ms and a low level duration of 75 ± 3 ms for each clock cycle period. Clock signal voltages shall be 13.4 ± 1.5V and 0 ± 1.0V for the high and low levels respectively.

3.3.1.13 MNOS input bandwidth. The clock signal bandwidth of each MNOS counter and option memory shall be such that these counters are not advanced by full amplitude input signals with frequencies which exceed 10 kHz.

3.3.1.14 Setter signals. The Type X nose section shall be electrically compatible with the M38 setter as specified below in responding to setter outputs and providing setter inputs.

3.3.1.14.1 Erase pulse. The nose section memories shall be "erased" (memory counter set to 3838 count) when a +28 ± 1.0V pulse of 150 ± 100 ms duration is applied to each erase/memorize line on J3-N. There shall be no voltage (less than 0.5V) applied to the B+ input pins on J3-N during the erase operation.

3.3.1.14.2 Memorize pulse. The complement of the counter state of the fuze memory counters shall be written into each MNOS when the erase/memorize lines on J3-N are momentarily connected to fuze common through a resistance of less than 1500 ohms for a duration of 150 ± 100 ms. The memorize pulses shall be applied with fuze B+ power applied to the J3-N power input pins.

3.3.1.14.3 Oscillator output. The oscillator output signals to the setter at J3-N shall be periodic rectangular pulses, 50% duty cycle, at the fuze oscillator frequency with a high level of 13.4 ± 1.5V and a low level not to exceed +1.0V.

3.3.1.14.4 Setter clock input. The nose section memory counters shall be capable of being clocked on the J3-N setter clock inputs with a low level not to exceed +1.0V to 12.8 ± 1.5V rectangular waveform, 50% duty cycle, signal over the frequency range of 300 Hz to 1.4 kHz when the setter control lines at J2-N are raised to 12.8 ± 1.5 VDC.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the current version before use.

3.3.1.14.5 Option set clock input. The option memories shall be capable of being preset by the setter with the clock signal specified below applied to the fuze MNOS output lines at J2-N when the setter control lines at J2-N are raised to 12.8 ± 1.5 VDC. The clock signal shall be from a low level not to exceed +1.0V to 12.8 ± 1.5V rectangular waveform, 50% duty cycle, signal at a frequency of 1.28 kHz ± 3%.

3.3.1.14.6 Memory counter prejam counts. The Type X timing and option memories shall produce correct memory outputs when the setter provides the following exact number of prejam counts on the setter clock inputs after application of the erase pulse and prior to the memorize pulse. A prejam count is produced by a negative transition on the input clock cycle.

3.3.1.14.6.1 Timing prejam. The prejam for setting Type X nose section timing shall be 169 counts prior to injecting the counts corresponding to the set time. This prejam count includes a one count bias to compensate for inflight battery initiation delay of the timing circuits and an additional one count bias for the memory read delay.

3.3.1.14.6.2 Option prejam. The prejam for setting the option.

Option	Prejam Count
01	226
02	258
03	292

3.3.1.15 Memory retention. The memory counter output (3.3.1.5) and option memory (3.3.1.7) specifications shall apply without resetting for a period of not less than 24 hours following fuze setting. The nose section temperature shall be maintained constant within ± 3°C during the period between setting and memory verification.

3.3.2 Non-operating requirements. All non-operating requirements apply after the fuze has been subjected to environmental conditioning.

3.3.2.1 Continuity. The resistance measured between the following locations in the Type X nose section shall be less than .05 ohm unless otherwise specified below.

From	To	From	To
B+ (A) terminal	J3-N, pin 9	J2-N, pin 6	J2-N, pin 16
B- (A) terminal	J3-N, pin 3	J2-N, pin 1	J3-N, pin 21 (75 milliohms)
B- (A) terminal	J3-N, pin 17	J3-N, pin 2	J3-N, pin 12 (75 milliohms)
B+ (B) terminal	J3-N, pin 19	J3-N, pin 3	J3-N, pin 13
B- (B) terminal	J3-N, pin 3	J3-N, pin 9	J3-N, pin 10
B- (B) terminal	J3-N, pin 17	J3-N, pin 17	J3-N, pin 18
Batt. Mon (A/B)	J3-N, pin 7	J3-N, pin 19	J3-N, pin 20
B- (A) terminal	J2-N, pin 6	B- (B) terminal	J2-N, pin 6

3.3.2.2 Battery monitor resistance. The resistance between the battery monitor pin on J3-N and common on J2-N shall be 1.0 megohm ± 100k ohms using SME (standard measuring equipment).

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the currentversion before use.

3.3.2.3 Isolation. The resistance between the following locations on the Type X nose section shall be 10 megohms minimum.

From	To
J2-N, pin 6 (common)	Fuze case
J3-N, pin 9 (Batt A)	Fuze case
J3-N, pin 19(Batt B)	Fuze case
J3-N, pin 7 (Batt. Mon.)	Fuze case
J2-N, pin 1 (Continuity)	Fuze case
J3-N, pin 9 (Batt A)	J2-N, pin 6 (Common)
J3-N, pin 19 (Batt B)	J2-N, pin 6 (Common)
J3-N, pin 9 (Batt A)	J3-N, pin 7 (Batt. Mon.)
J3-N, pin 19 (Batt B)	J3-N, pin 7 (Batt. Mon.)
J3-N, pin 9 (Batt A)	J3-N, pin 19 (Batt B)

3.3.3 Environmental requirements. Unless otherwise specified, the complete Type X nose section shall meet the requirements specified in 3.3.1 and 3.3.2 when subjected to the environmental conditions specified below.

3.3.3.1 Extreme cold temperature. The Type X nose section shall meet the requirements specified in 3.3.1 when operated at -35°C in accordance with 4.6.3.1.

3.3.3.2 Extreme hot temperature. The nose section shall meet the requirements specified in 3.3.1 when operated at +65°C in accordance with 4.6.3.2.

3.3.3.3 Temperature humidity. The nose section shall be subjected to the temperature-humidity environment described in 4.6.3.3.

3.3.3.4 Thermal shock. The nose section shall be subjected to the thermal shock environment described in 4.6.3.4.

3.3.3.5 Salt fog. The nose section shall be subjected to the salt fog environment described in 4.6.3.5.

3.3.3.6 Sand and dust. The nose section shall be subjected to the sand and dust environment described in 4.6.3.6.

3.3.3.7 Transportation vibration. The nose section shall be subjected to the transportation vibration environment described in 4.6.3.7.

3.3.3.8 Rain. The nose section shall be subjected to the rain environment described in 4.6.3.8.

3.3.3.9 Static electricity. The J2 and J3 connector contacts on each nose section shall be subjected to the static electricity environment described in 4.6.3.9.

3.3.3.10 Drop. The Type X nose section shall meet the requirements specified in 3.3.1 following subjection of the drop environment described in 4.6.3.10.

3.3.3.11 Ice Fog. The nose section shall be subjected to the ice-fog environment described in 4.6.3.11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

3.4 Workmanship. All parts shall be manufactured and finished in a thoroughly workmanlike manner to insure satisfactory functioning and durability. (See MIL-A-2550, Condition of Materials, Parts, and Assemblies.)

3.4.1 Soldering. Soldering shall be in accordance with M735 Solder Specification 11711877.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that the supplies and services conform to prescribed requirements.

4.1.1 Contract quality assurance system. The contractor shall provide and maintain a quality assurance system in compliance with MIL-Q-50829.

4.2 Government verification. All quality assurance operations performed by the contractor shall be subject to Government verification in compliance with MIL-Q-50829.

4.3 First article approval sample. The first article approval sample as specified in 3.1.1 shall be examined and tested in accordance with the first article Approval Sample tests (4.4.5.2), Classification of Defects (4.4.4), and Material and Component Certification (4.4.6). The tests shall be performed by the contractor under the observation of the Government QA representatives and the representative of the cognizant technical agency. The contractor shall supply complete data in reproducible form on the contractor tests and examinations of the first article approval sample units. The data and tested samples shall be delivered to the technical agency.

4.3.1 Approval of first article sample. If the sample passes the criteria of specified examinations and tests, it will be approved. If the sample fails in any of the specified examinations and tests, a failure analysis shall be conducted by the contractor under Government surveillance. The results of the tests and failure analysis of the units, together with the engineering analysis of the units, shall form a basis for corrective action. Depending upon the degree of corrective action deemed necessary by the Government, the first article approval sample may be:

a. Conditionally approved with the provisions that the recommended changes are made by the contractor prior to start of regular production. Such portions of first article inspections needed to verify corrective action may be included in the acceptance requirements of the first production Type X nose sections at the Government's discretion.

b. Disapproved, and new samples required for the tests failed and for related tests which might be invalidated by the corrective action.

c. Disapproved, and a complete new sample required for approval. In all cases, the contractor shall comply with any required changes for the duration of the contract.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the currentversion before use.

4.3.1.1 Reinstitution of tests. Acceptance of the first article approval sample does not relieve the contractor from meeting all requirements of this specification throughout the contract. The Government reserves the right to independently verify all requirements by repeating first article approval sample tests or any portion thereof of any production Type X assembly. If such verification indicates failure to meet requirements previously verified by first article approval sample tests, the contractor will be required to take corrective action. If the requirements are not met on the first nose section to which the correction can be applied, the Government reserves the right to institute tightened inspection by adding to the normal nose section acceptance inspections all or such parts of the first article approval sample tests needed to verify corrective action. Normal acceptance inspection will be resumed after two consecutive nose sections have satisfactorily passed the tightened conditions.

4.4 Acceptance inspection. Inspection shall be as specified in MIL-A-2550 and in this document. The contractor shall notify the Government QA representative prior to proceeding with inspection for Classification of Defects (4.4.4) and Acceptance Tests (4.4.5). Inspection may be made at a higher assembly level provided that equal quality assurance provisions are satisfied, but not at a lower level than specified.

4.4.1 Sampling. Every nose section shall be tested as required in section 4.4.2.

4.4.2 Type X nose acceptance. Type X nose sections shall be accepted on the basis of Classification of Defects (4.4.4), Production Acceptance Tests (4.4.5.1), and Material and Component Certification (4.4.6).

4.4.2.1 Disposition of rejects. Rejected nose section assemblies may be resubmitted with the concurrence of the procuring agency in accordance with the following:

a. Resubmitted assemblies shall have been reworked to repair all discrepancies disclosed during previous submission to the tests.

b. Rework shall follow the same techniques and specification used in manufacturing the Type X nose section assembly and shall be approved by the designated technical agency. Patch coating of previously coated printed wiring assemblies using adhesive 11709957 is allowed. Use of adhesive, epoxy, 11739764 in repairing damaged printed wiring boards including lifted track and exposed fibers, is allowed.

c. The resubmitted assembly shall be resubjected to the test in which the failure occurred and any other test required by the designated technical agency to demonstrate acceptability.

d. When the resubmitted assembly passes the tests in step c above, then the normal test sequence shall be resumed.

e. No assembly may be resubmitted if the unit fails the retest after repairs are effected by replacing the same part twice without concurrence from the designated technical agency (excluding selects).

f. No assembly may be resubmitted after it has been rejected by the same test five times without concurrence from the designated technical agency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

4.4.3 Data recording. A written record shall be made of the results of all examinations and tests performed as specified elsewhere in section 4 of this specification. The test data shall be recorded on 80 column standard data processing punch cards, or other computer compatible input medium approved by the Government. Data from each operating test shall be recorded, but only the defect summary need be recorded in the inspection of the classification of defects. Data layout of the card shall be approved by the Government. The complete cards shall be forwarded to the designated Government agency without two working days after the Government acceptance of the nose section.

4.4.3.1 Data for FAAS, comparison sample or production acceptance tests. The FAAS, comparison sample or production acceptance test data on each nose section shall be assembled into an approved data log book in duplicate and identified by the assembly serial number. After Government acceptance of the assembly, the duplicate copy of the data log book shall be shipped as directed by the procuring activity. The original data log book shall be retained by the contractor for the duration of the contract. This book shall include at least the following sections for the complete Type X nose section assembly:

a. Log contents and end item contractor certification;

b. Subassembly serial number identification;

c. Major parameter data summary;

d. Nose section system data analysis (brief overview of all system test data noting test failures and repairs prior to acceptance);

e. Nose section final system electrical test data sheets including operating time record;

f. Mechanical final assembly data record;

g. Applicable Engineering Change Proposals (ECPs), Request for Waivers (RFWs), and Request for Deviations (RFDs);

h. Any other sections required to compile the assembly history.

4.4.4 Classification of Defects. The assemblies shall be inspected by using the Classification of Defects and applicable drawings.

Note: AQL's shown at the head of the group apply to the group as a whole.

When specific AQL's are intended for particular defects, they are shown on the same line as the defect.

Source: https://assist.dla.mil Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

4.4.4.1 Nose Section, M754 "Type X" (Dwg 11725080)

Categories	Defects	Acceptance Criteria	Method of Inspection
Critical	None defined		
Major			
101	.002/.020 - Gap	100%	Feeler Gage
102	.400/.395 - Collar Length	100%	Gage
103	1.384 ± .008 - Connector free state axial location (2 places)	100%	Gage
104	Note 9 - Connector lateral float (2 places)	100%	Gage
105	Note 10 - Connector axial float & force (2 places)	100%	SME
106	Connector Pin 1 location (2 places)	100%	Visual
107	.1253 - Max Pin diameter (2 places)	100%	Gage
108	.095 - Max Pin diameter	100%	Gage
109	⌖ A B Ⓜ Ø .005 Ⓜ Pin location ⌖ A B Ⓜ C Ⓜ Ø .005 Ⓜ	100%	Gage
110	⌖ A B Ⓜ C Ⓜ Ø .010 Ⓜ Pin location	100%	Gage
111	.994, ⌖ A B Ⓜ C Ⓜ .004 Total PS HSG width (max.)	100%	Gage
112	2.404, ⌖ A B Ⓜ C Ⓜ .004 Total PS HSG length (max.)	100%	Gage
113	1.407 Max - PS HSG height	100%	Gage
114	2.560 - Housing diameter (max.)	100%	Gage
115	M80 X 2 - 5G - Collar thread (go only)	100%	Gage
116	2.806 Max, .156 Min - Wrench slot (2 places)	100%	Gage
117	Damaged connectors	100%	DS-1
118	Final assembly of major components	100%	DS-2
119	1.003 Max - Housing height	100%	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

4.4.4.2 Packaging (Section 5.2).

Categories	Defects	Req.	Acceptance Criteria	Method of Inspection
Critical	None defined			
Major				
101	Marking	5.3	2.0	Visual
102	Records	5.4	2.0	Visual
Minor				
201	Packaging	5.1	4.0	Visual
202	Packing	5.2	4.0	Visual

4.4.4.3 Defect standards.

DS-1 -- Damage to connector pin, sockets or housing such that proper assembly of mating connectors is hampered or prohibited shall constitute a defect.

DS-2 -- Interferences which prevent proper assembly of any part or parts shall constitute a defect.

4.4.5 Acceptance tests. All acceptance tests shall be performed by the contractor in accordance with the following paragraphs. Failure reports shall be submitted to the cognizant technical agency for any test failed in production acceptance, first article approval acceptance and comparison sample tests.

4.4.5.1 Production acceptance tests. The nose section and selected subassemblies shall be subjected to the following subassembly and system manufacturing acceptance tests.

4.4.5.1.1 Subassembly acceptance tests. Subassemblies for Type X nose sections shall be subjected 100% to the M/T Assy acceptance tests listed below. In the event that methodology is developed, and approved by the cognizant technical agency, which allows any test listed below to be tested at the final system level, it is desirable and acceptable to delete that test requirement from this list and add it to 4.4.5.1.2.

Subassembly	Requirement	Requirement Paragraph	Test Paragraph
M/T Assy	MNOS Power	3.3.1.4.1	4.6.1.7
	MNOS read bias	3.3.1.8.1	4.6.1.12.1

4.4.5.1.2 Type X Nose section acceptance tests. All Type X nose sections shall be subjected 100% to the following production acceptance tests after they have been subjected to the environmental conditioning consisting of static electricity (3.3.3.9). In addition to performing the following acceptance tests at ambient temperature conditions, all nose section assemblies shall be subjected 100% to the following acceptance tests, except as noted, at the extreme cold and hot conditions specified in 4.6.3.1 and 4.6.3.2 respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

Requirement	Requirement Paragraph	Test Paragraph
Accuracy	3.3.1.2	4.6.1.2
DC current	3.3.1.3	4.6.1.3
CMOS Power	3.3.1.4.2	4.6.1.8
MNOS read delay	3.3.1.10	4.6.1.14
Memory counter outputs	3.3.1.5	4.6.1.9
Erase disable	3.3.1.6	4.6.1.10
Option memory	3.3.1.7	4.6.1.11
Bias threshold margin	3.3.1.8.3	4.6.1.12.3
E/M voltage	3.3.1.8.2	4.6.1.12.2
Oscillator frequency	3.3.1.11	4.6.1.15
Logic reset	3.3.1.9	4.6.1.13
Clock signal	3.3.1.12	4.6.1.16
MNOS input bandwidth	3.3.1.13	4.6.1.17
Setter signals	3.3.1.14	4.6.1.18
Memory retention	3.3.1.15	4.6.1.19
Non-operating requirements (Note 1)	3.3.2	4.6.2

NOTE 1 - Ambient temperature test only

4.4.5.2 First article approval sample tests. Each sample Type X nose section shall be subjected to the first article tests specified in figure 5. Unless otherwise specified, all tests shall be conducted by the contractor under the observation of the Government QA representative of the cognizant Government technical agency. The subassemblies and sets of parts shall be examined for conformance to the drawings. The sequence of the first article tests shall be as described in figure 5, except that the environmental conditioning sequence within any test group need not be as shown.

4.4.5.3 Comparison sample tests. The comparison sample Type X nose section shall be selected at random by the resident inspector from assemblies which successfully passed the acceptance tests listed in 4.4.5.1. The comparison sample test sequence shall include any or all of the first article approval sample tests (4.4.5.2) as directed by the designated technical agency. All comparison sample tests (unless otherwise specified) shall be performed by the contractor and witnessed by the resident Government inspector, and a representative designated by the procuring

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

agency. The contractor shall supply complete data in reproducible form on the contractor tests of the comparison samples. All data and samples shall be forwarded to the designated technical agency who may conduct other tests and engineering analyses.

4.4.5.3.1 Comparison sample failures. If an assembly fails any of these tests, testing shall be stopped. The contractor shall analyze the failure and forward data and recommendations to the technical agency within five working days. The technical agency will review the analysis and recommendations, and direct changes and retests where indicated.

4.4.6 Material and component certification. Prior to acceptance under this procurement, the contractor shall demonstrate by means of certification or statement of findings, that only materials and components conforming to the item specification and drawings have been used.

4.5 Test conditions and equipment.

4.5.1 Test conditions. Unless otherwise specified, all measurements are to be made at normal ambient room conditions of temperature, relative humidity and altitude. Temperature conversion between Fahrenheit and Celsius shall be carried to the nearest whole degree. The following table of tolerances shall be applied where applicable to specified test conditions unless otherwise defined in the test procedures:

a.	Temperature in test chamber	± 1.5°C
b.	Relative humidity	±5 percent
c.	Vibration amplitude	±10 percent
d.	Electrical measurements	
	DC voltage amplitude	±2 percent
	AC voltage amplitude	±5 percent
	Current amplitude	±5 percent
	Fuze event time	±2 millisecond

4.5.2 External loads.

Line	Simulated Setter Load (ohms + 5%)	Simulated Fuze (ohms + 5%)
Oscillator output	27k	27k
Clock output	27k	27k
MNOS output	27k	27k
01 set output	27k	27k
02 set output	51k	51k
03 set output	51k	51k

4.5.3 Inspection equipment. Inspection equipment shall be in accordance with the design level shown by the applicable EDL and of sufficient accuracy and quality to permit performance of the required inspection. Gage and instrument setting shall be a function of the equipment, and independent of the operator. Equipment shall be marked to indicate the limit of acceptance for each test, but shall not be so marked as to reveal classified security information. Test procedures and calibration procedures shall conform to MIL-Q-50829.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

4.6 Test procedures.

4.6.1 Operating tests.

4.6.1.1 Test power. The power supply test voltage at the supply output terminals shall be as specified below for the indicated test temperature applied to J3-N, pins 2 and 12 (+) and J2-N, pins 6 and 16 (-).

PS Terminal Voltage	Test Temperature
25.0 ± 0.5V	Cold (3.3.3.1)
33.0 ± 0.5V	Room (25° ± 5°C)
41.5 ± 0.5V	Hot (3.3.3.2)

4.6.1.2 Accuracy. Set the Type X nose with a production M38 fuze setter (per MIL-F-48704) to the times specified in 4.6.1.5 while the fuze nose is at the test temperature. Verify that each set time playback on the M38 setter corresponds to the set time ± 0.1 second for both the "Verify" and "Interrogate" modes of playback on the setter.

4.6.1.3 DC current. The nose section DC current will be determined by measuring the voltage drop across a 1.00 ohm series resistor.

4.6.1.4 External impedance. The loop resistance between power supply output terminals and the fuze nose section connectors J2-N and J3-N shall not exceed 2 ohms using a test current of 1.0 ampere minimum.

4.6.1.5 Setting range. The Type X Nose Section shall be tested to the following time and option settings.

Time	Option
17	01
70	02
125	03

4.6.1.6 Resettability. Set and reset the Type X nose section 1000 times using at least two different times and options. After subjecting the Type X nose section to this test, perform a final acceptance test per 4.4.5.1.2.

4.6.1.7 MNOS power. Measure the memory/timing 20.5V line at test point 2 as defined by 11710305 for each channel with an input voltage per 4.6.1.1.

4.6.1.8 CMOS power. The nose section output voltage for the 13.7V regulators for channel A, B, and C (pins 11, 10 and 20 of J2N, respectively) shall be measured with an input voltage per 4.6.1.1. When the 25V input is applied, a 511 ohm resistor shall be diode cross-coupled as a load on the output of channel A and channel B. This resistor is used to simulate the additional 25 mA that these two regulators must be able to provide. It is done at 25V to simulate worst-case conditions. This additional load is not used at 41.5V input.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

4.6.1.9 Memory counter output. The MNOS Enable (J2N-2, 3, 13) signals shall be measured during nose section timeout (applied power per 4.6.1.1). The first transition, relative to To shall be used to determine the MNOS enable event time. The voltage levels are measured at To + 0.1 s and event time plus 5 s. The transition time (from low to high) shall be determined by measuring the voltage level (at least 80 percent is required) immediately following the detection of MNOS Enable. Any transition time less than 25 ms is acceptable. For each channel, the MNOS enable signal shall release an external test counter with a fixed 120-count decoded output. Each test counter shall be clocked by the clock signal (4.6.1.16) from its respective fuze channel. The final event times measured for each channel shall be corrected by adding 0.10 second and compared to the set times.

4.6.1.10 Erase disable. An erase pulse is applied to the nose section on pins J3N-4, 5, 14 with fuze power off. Power is applied per 4.6.1.1 and the nose section is clocked the equivalent of 200 s. No MNOS outputs shall occur on pins J2N-2, 3, 13.

4.6.1.11 Option set outputs. The option set (J2N-5, 7, 9, 15, 17, 19) signals shall be measured during nose section timeout for each option (applied power per 4.6.1.1). The voltage levels are measured within both To to To + 3 s and at MNOS Enable (see 4.6.1.9) plus 1.5 s. The transition time (from low to high) verification is determined by measuring the voltage level 10 ms after MNOS Enable.

4.6.1.12 MNOS bias.

4.6.1.12.1 Operating read bias. Apply power to pin 19 on the M/T board at the voltage specified in 4.6.1.1. Measure the voltage on the erase/memorize line (pin 12) of the M/T board. The operating bias is calculated by subtracting this voltage measurement from the substrate voltage reading taken in 4.6.1.7 (MNOS power).

4.6.1.12.2 E/M voltage. Apply power to the nose section and measure the voltages at J3-N pins 4, 5 and 14.

4.6.1.12.3 Bias threshold margin. The memory counter output and option set output tests (4.6.1.9 and 4.6.1.11) shall be repeated on the nose section with an external voltage of 18.5 ± 0.05V applied to J3-N pins 4, 5, and 14. Reset the nose (4.6.1.2) and repeat the above for an external voltage of 14.5 ± 0.05V applied. Reset the nose prior to performing further tests on the fuze memories.

4.6.1.13 Logic reset. The input voltage to the memory/timing board is digitally decreased. The input voltage (pin 19) and the oscillator (pin 26) are monitored. Input power is gradually decreased until oscillations cease. This indicates the reset has taken place. The input voltage is then read. Next the input power is gradually increased until oscillations are detected. This indicates reset has been released. The input voltage is again read.

4.6.1.14 MNOS read delay. The delay is used to prevent the readings of the MNOS devices until the power supply voltages are well established. The nose section is set per 4.6.1.16 to time out against X pulses (1 pulse equals 0.1 second). When timed out, it must result in X-1 pulses. The missing pulse occurred prior to the release of the long/short pulses indicating that the MNOS read delay is functional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

4.6.1.15 Oscillator frequency. The nose section output frequency (J3N-1, 8, 11) of the oscillators shall be measured at ambient temperature. Next the nose section is tested at cold (4.6.3.1) and hot (4.6.3.2) temperature. The delta frequency drift is then determined by taking the differential between ambient and the other two temperatures.

4.6.1.16 Clock signal. The fuze clock signals (J2N-12, 18, 21) shall be measured during nose section timeout (4.6.1.9). The cycle period is measured 10 times and the average taken to determine the clock frequency. The duration for the high level is measured 10 times and the average taken. The low level duration is then determined by subtracting the high level from the full duty cycle. The voltage levels are measured 50 microseconds after a positive and a negative transition.

4.6.1.17 MNOS input bandwidth. To test the MNOS input bandwidth, the nose section is subjected to a fast clock test. To set the nose section, the MNOS memories are clocked with a signal in the frequency range of 300 to 1400 Hz (pins 6, 15 and 16 of J3N). The fast clock (10.240 kHz square wave) fills the positive half cycle of the lower frequency signal. Verification is made by applying fuze power and checking for a correct timeout on MNOS enable (pins 2, 3 and 12 of J2N) and correct option set outputs on J2N. A correct timeout and option set outputs will not occur if the MNOS clock input bandwidths are too wide.

4.6.1.18 Setter signal. The following tests check the nose section's compatibility with the M38 setter. The nose is first erased by applying a positive voltage to the erase/memorize line. Apply Vcc and coincidentally apply the 13.7V outputs of channels A, B, and C to the three setter control lines (pins 4, 8 and 14 of J2N). Feed the appropriate prejam signal per 3.3.1.14.6.1 to the setter clock input (pins 6, 15 and 16 of J3N). Then apply the set time on the same inputs as the prejam signal. Next, the option prejam pattern is clocked in at 640 Hz on the MNOS enables (pins 2, 3 and 13 of J2N). This pattern is defined in paragraph 3.3.1.14.6.2. The memorize pulse goes to ground for the required time. Remove power from all pins.

4.6.1.18.1 Erase pulse. The setter signal test is run with an erase pulse of 50 ms at 27V followed by a memorize pulse of approximately 150 ms applied with fuze power off. The test is repeated with an erase pulse of 250 ms at 27V. The above is repeated for an erase pulse of 29V at each erase pulse duration. Verification is made by checking if there was or was not a correct timeout for each condition.

4.6.1.18.2 Memorize pulse. An erase pulse of 28V shall be applied for 150 ms. The setter signal test is run with a memorize pulse of 50 ms by pulling the erase/memorize lines to 1.6V. Verification is made by checking if there was or was not a correct timeout for each channel. Repeat the test for a memorize pulse duration of 250 ms.

4.6.1.18.3 Oscillator output. The oscillator outputs (J3N-1, 8, 11) shall be measured during nose section timeout (power applied per 4.6.1.1). The cycle period is measured by gating a 100 kHz signal with the positive going transition and counting the number of pulses occurring during the high level. Next the 100 kHz signal is gated by the negative going transition and the number of pulses counted during the low level. From the above pulse counts the oscillator frequency and duty cycle can be determined. The voltage levels are measured 50 microseconds after a positive and a negative transition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

4.6.1.18.4 Setter clock input. The nose section clock inputs (J3N-6, 15, 16) are set by a 300 Hz, 50 percent duty cycle signal. The low and high levels are as specified in 3.3.1.14.4. Verification is made by checking if there was or was not a correct timeout for the 300 Hz setter clock input frequency. The test is then repeated for a setter clock frequency of 1400 Hz.

4.6.1.18.5 Option set clock input. The nose section option set clock inputs (J2N-2, 3, 13) and setter control lines (J2N-4, 8, 14) are set per the signals in 3.3.1.14.5. Verification is made by checking if there was or was not a correct option set output.

4.6.1.18.6 Memory counter prejam counts. The nose section shall be timed out for three different settings to cover all options (power applied per 4.6.1.1).

4.6.1.18.7 Timing prejam. Verification is made by determining if there was or was not a correct timeout (J2N-2, 3, 13) for the relevant tests specified in 4.6.1.18.

4.6.1.18.8 Option prejam. Verification is made by determining if there was or was not a correction option set (J2N-5, 7, 9, 15, 17, 19) for the relevant tests specified in 4.6.1.18.

4.6.1.19 Memory retention.

4.6.1.19.1 FAAS test. Set the nose section to 200.0s, 01 option. Maintain constant fuze temperature within ± 3°C for a period of not less than 24 hours. After 24 hours, verify conformance to 3.3.1.5 and 3.3.1.7.

4.6.1.19.2 Production acceptance test. Perform the test specified in 4.6.1.19.1 except change the time from 24 hours to 1 hour.

4.6.2 Non-operating tests.

4.6.2.1 Nose section resistance. The nose section resistance (per 3.3.2.1) shall be measured with a four-wire low current resistance bridge and/or ohmmeter.

4.6.3 Environmental tests. Unless otherwise specified, the complete Type X assembly PN 11725080 shall be subjected to the environmental conditioning described below.

4.6.3.1 Cold temperature test. The Type X nose section shall be placed in a controlled temperature chamber maintained at -35°C for 1 hour minimum. This temperature shall be maintained during operational testing of the nose section in the temperature chamber.

4.6.3.2 Hot Temperature Test. The ambient Type X nose section shall be placed in a controlled temperature chamber maintained at 65°C for 1 hour, or for 1 1/2 hrs if the nose was previously conditioned cold just prior to starting the hot test conditioning. This temperature shall be maintained during operational testing of the nose section in the temperature chamber.

4.6.3.3 Temperature-humidity test. The Type X nose section attached to test fixture shall be subjected to the temperature-humidity cycles shown in figure 1 and 2. Perform 7 cycles each.

4.6.3.4 Thermal shock test. The Type X nose section attached to test fixture shall be subjected to the temperature shock cycle as shown in figure 3. Perform this cycle three times. After the third cycle, transfer the item within one minute to a chamber maintained at 21°C for a period of not less than six hours.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the current version before use.

4.6.3.5 Salt fog. The Type X nose section attached to test fixture shall be subjected to the salt fog test of MIL-STD-810C, Method 509.1 for a total of 1 hour. After 50 minutes, remove the nose section PN 11725080 and expose it to this environment for the remaining 10 minutes.

4.6.3.6 Sand and dust. The Type X nose section attached to test fixture shall be subjected to the sand and dust test of MIL-STD-810, Method 510.1 with the following changes in Procedure I. Perform Step 1 for a total of 1 hour. After 50 minutes, remove the nose section and expose it to this environment for the remaining 10 minutes. Omit steps 2 and 3.

4.6.3.7 Transportation vibration. The Type X nose section packaged in storage container, shall be subjected to 2 hours of random vibration per figure 4, followed by the sinusoidal vibration environment shown below:

Frequency (Hz)	Vibration Input (g)	Sweep Rate	Total Time/Ax
10-50	1.5	10-50 Hz in 5 min.	5 min.
50-150	2.5	50-150 Hz in 5 min.	5 min.

The Type X Nose Section shall be subjected to the above vibration environments at ambient, -35°F + 60°C for each axis.

4.6.3.8 Rain test. The nose section attached to test fixture shall be subjected to the rain test of MIL-STD-810, Method 506.1, Procedure 1. Prior to the last 10 minutes of 30-minute rain, remove the nose section and expose it for the remainder of the test cycle.

4.6.3.9 Static electricity. Using the static generator composed of PNs 15977, 15978 and 15979, a static voltage of 2.2 KV will be applied to the pins and sockets of J2 and J3 connectors as follows:

J-2	All pins
J-3	All pins

Verification is made by determining that all requirements listed in 4.4.5.1.2 for nose section have been met.

4.6.3.10 Nose section drop. The nose section shall be placed in a temperature chamber maintained at -35 degrees C for a minimum of 2 hours. Within 15 minutes after removal from the temperature chamber, perform 3 drops from a height of 30 inches on a concrete surface: nose down, base down, and side down impacts. Repeat the above sequence with the nose section conditioned at 60 degrees C. Hand release drops are adequate for this test.

4.6.3.11 Ice fog. The nose section shall be subjected to the ice fog test described below. Using test apparatus specified for the salt-fog test of MIL-STD-810, place the nose section in the test chamber. Reduce the temperature to -30 degrees C at a rate of 10 degrees C per hour. Maintain for 2 hours. Using water maintained at 5 degrees C, produce ice fog for 5 minutes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Cleaning, preservation and packaging. The cleaning, preservation and packaging of items for protection against corrosion, physical damage and other forms of deterioration during handling, shipment and storage shall be in accordance with MIL-P-116 and as defined by contract. Packaging Type X nose sections shall be in accordance with PDL 11725080.

5.2 Packing. Security protection shall be in accordance with procedures for classified information as prescribed in DOD 5220.22M - Industrial Security Manual.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages and shipping containers shall be marked in accordance with requirements of MIL-STD-129, and DOD 5220.22M.

5.4 Records.

5.5 Log books. Log book data recording shall be as specified in 4.4.3.1.

6. NOTES

6.1 Items to be included in the procurement documents.

6.1.1 Documents. Procurement documents should specify the title, date and number of specification.

6.1.2 Testing of comparison samples. These samples are subject to testing by the contractor at the Government's expense, and retesting by the Government to insure that first article approval requirements continue to be met. Failure of these samples will not affect fuze acceptance, but may indicate future mandatory action.

6.1.3 Lead time. The testing of the first article approval sample will require a maximum of 60 working days. If there are failures, additional time will be required.

6.1.4 Data requirements. The following data are required by this specification to be furnished to the Government and should be entered on DD form 1423 if made a part of the contract:

First Article Test Results
Subassembly and final system Test Records on data tape and hard copy
Log Books (5.4.1)
MIL-Q-50829, para. 3.6.1 -- Contractor-furnished Designs.

6.1.5 Ordering data. This paragraph should list the determinations, if any, of the type, grade, class and/or style or choice of presented alternatives that must be made and included in the contract.

6.2 Advisory documents. The following documents are not part of this specification, but may provide useful information to the contractor. Copies are available for reference at the Harry Diamond Laboratories.

6.2.1 Manufacturing process report or description of manufacture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

6.2.2 Quality assurance system documents obtained from previous contracts.

6.2.3 Stockpile to target sequence (STS).

6.2.4 Terms and abbreviations unique to the M735 fuze program. HDL Specifications MIL-F-48703. (Document classified SECRET.)

6.3 Engineering information. Upon request, copies of the data collected in the acceptance of a fuze will be made available to the Government representative. Additional data or data requiring special requirements, when needed for engineering purposes, will be specifically defined by the contract.

6.4 MIL-Q-50829. Copies of MIL-A-50829 may be obtained from the Harry Diamond Laboratories, Attn: Contracting Officer, Adelphi, MD 20783-1197.

6.5 Previous issues. MIL-T-48707(AR) was for US Army Armament, Munitions and Chemical Command internal use only and was not forwarded to the Naval Publications and Forms Center for Publication.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

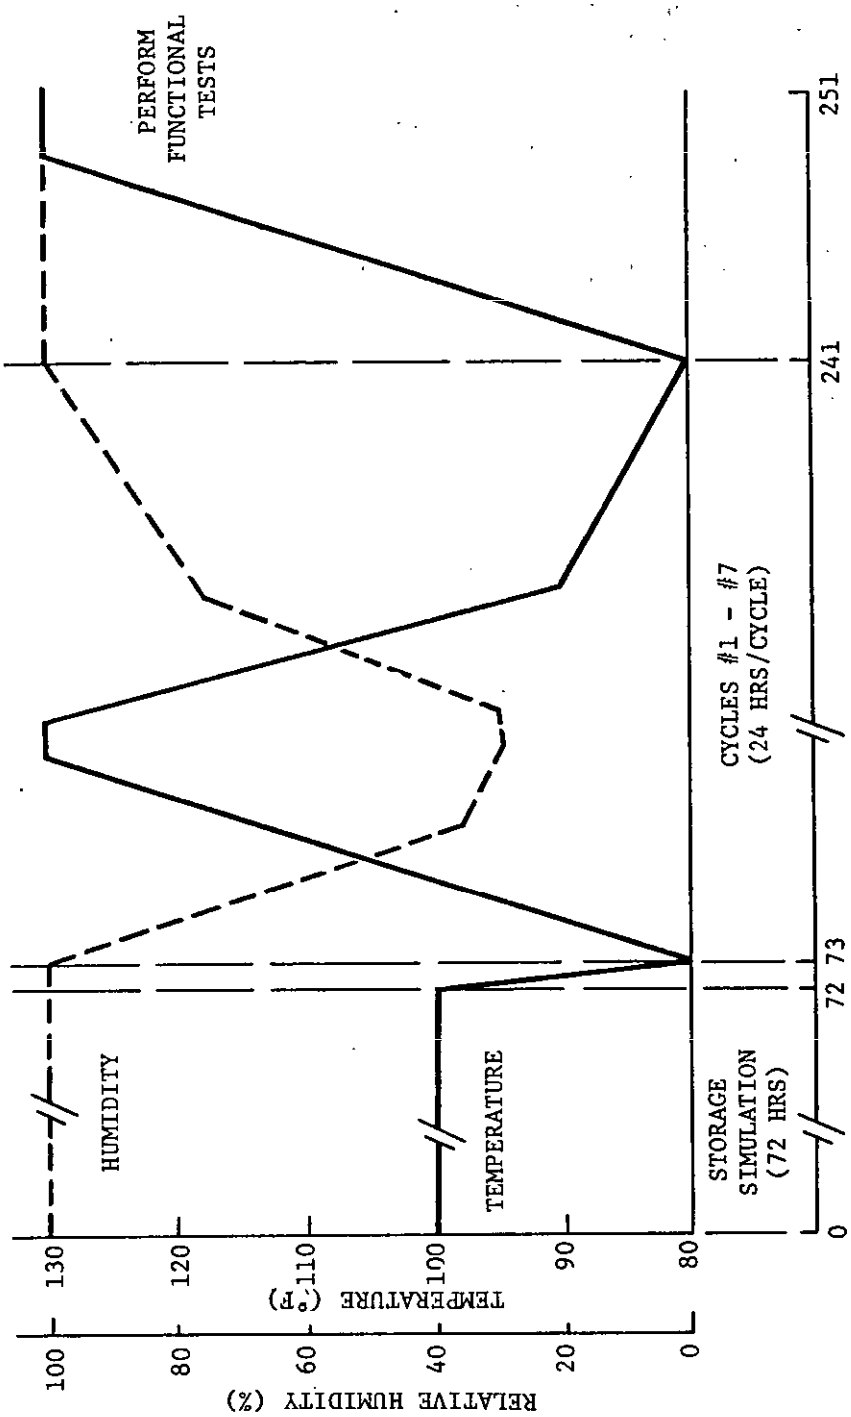


Figure 1. Environment No. 1 Temperature/Humidity (High)

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the current version before use.

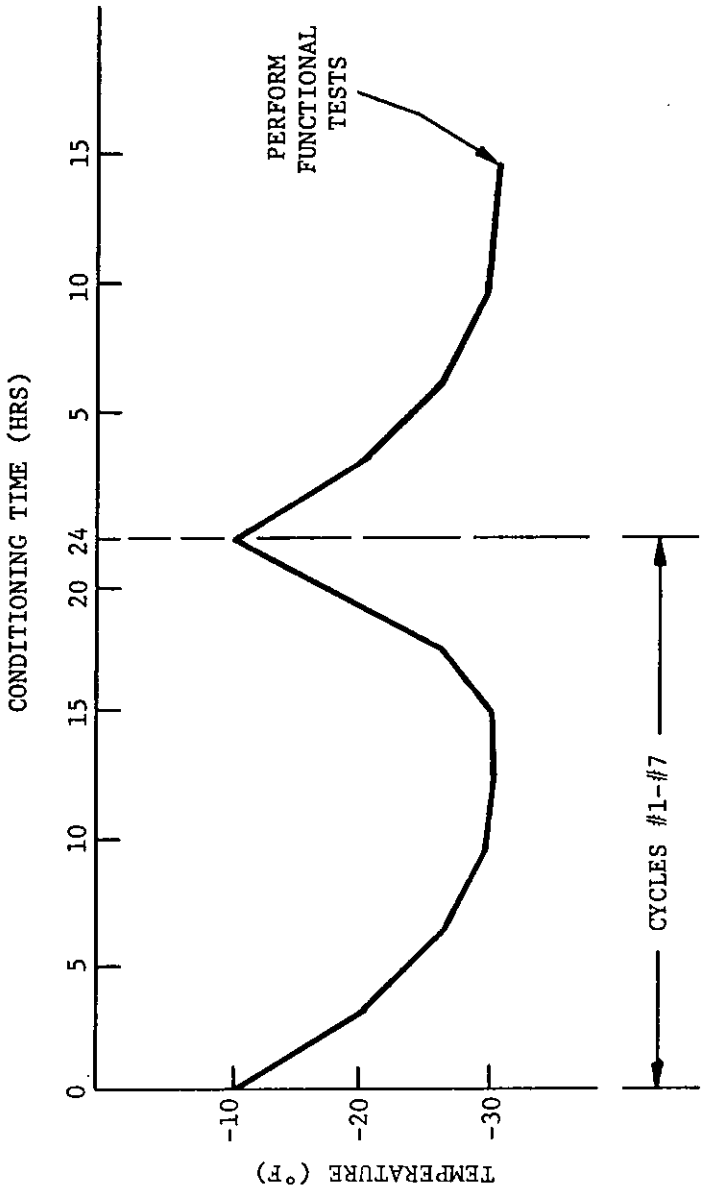


Figure 2. Environment No. 2 Air Temperature (Low)

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the current version before use.

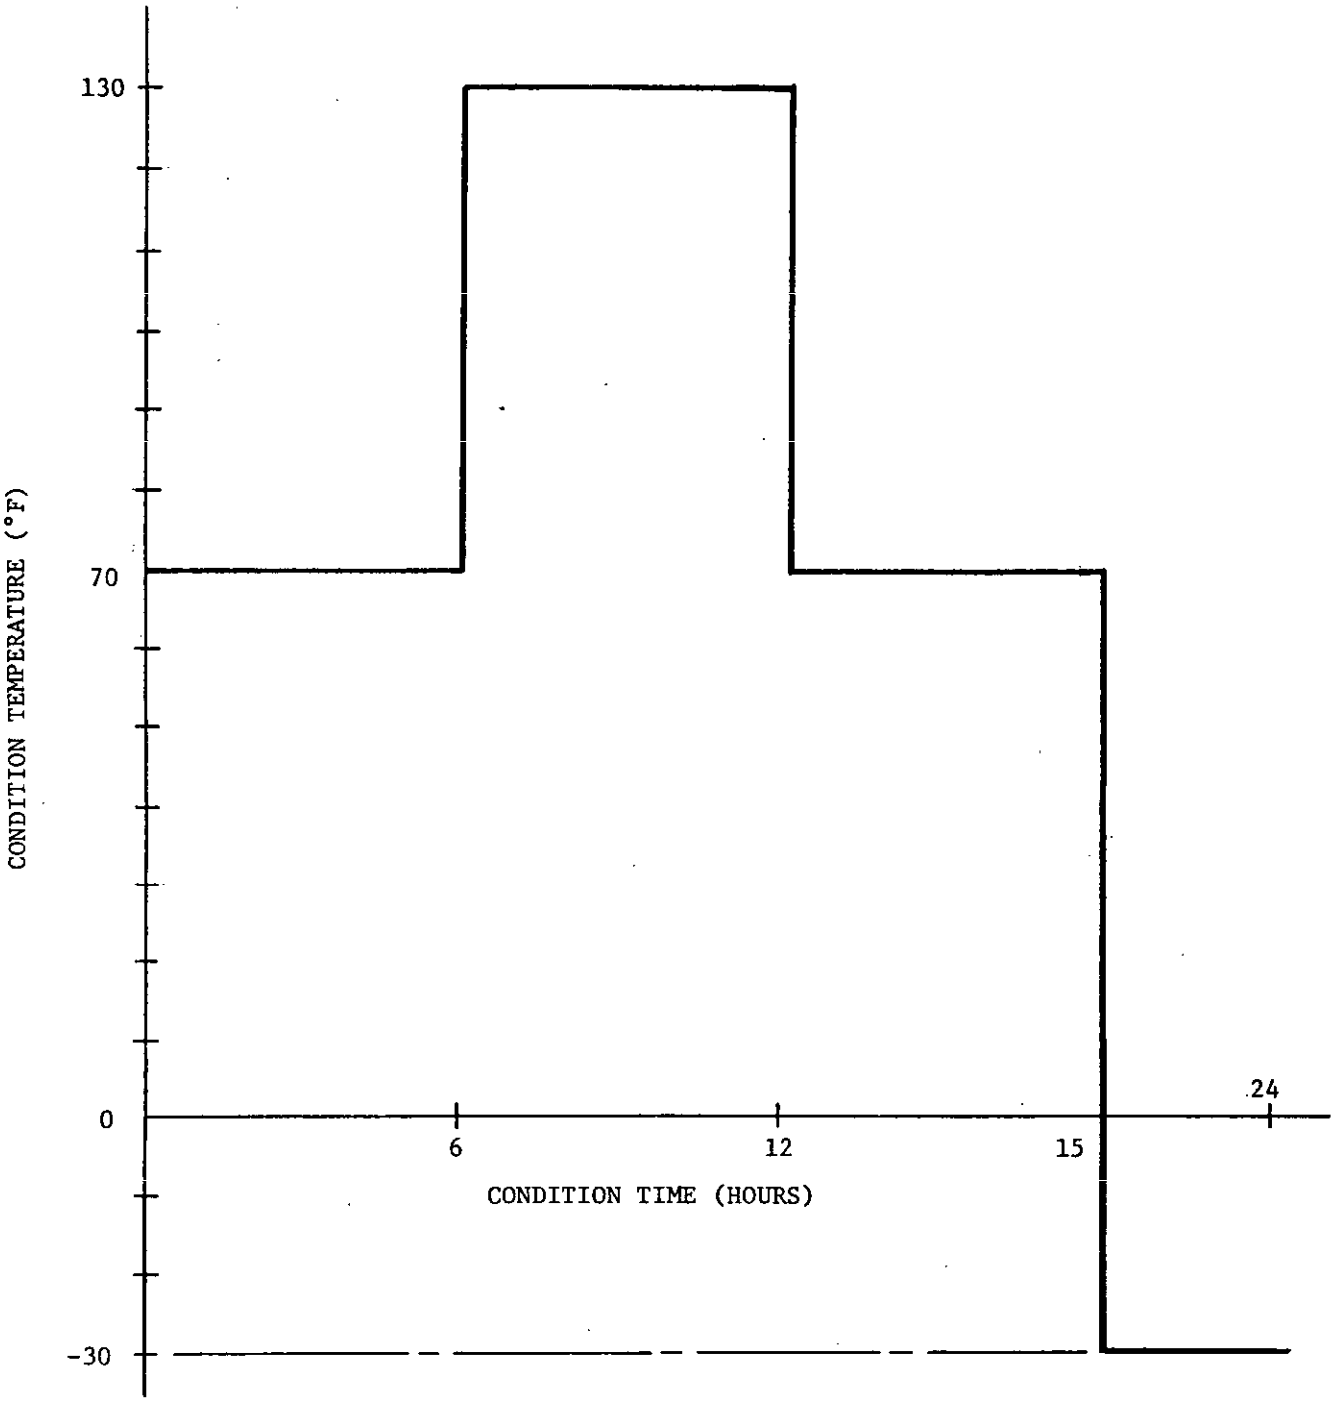


Figure 3. Temperature Shock Environment Stage 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:37Z
Check the source to verify that this is the current version before use.

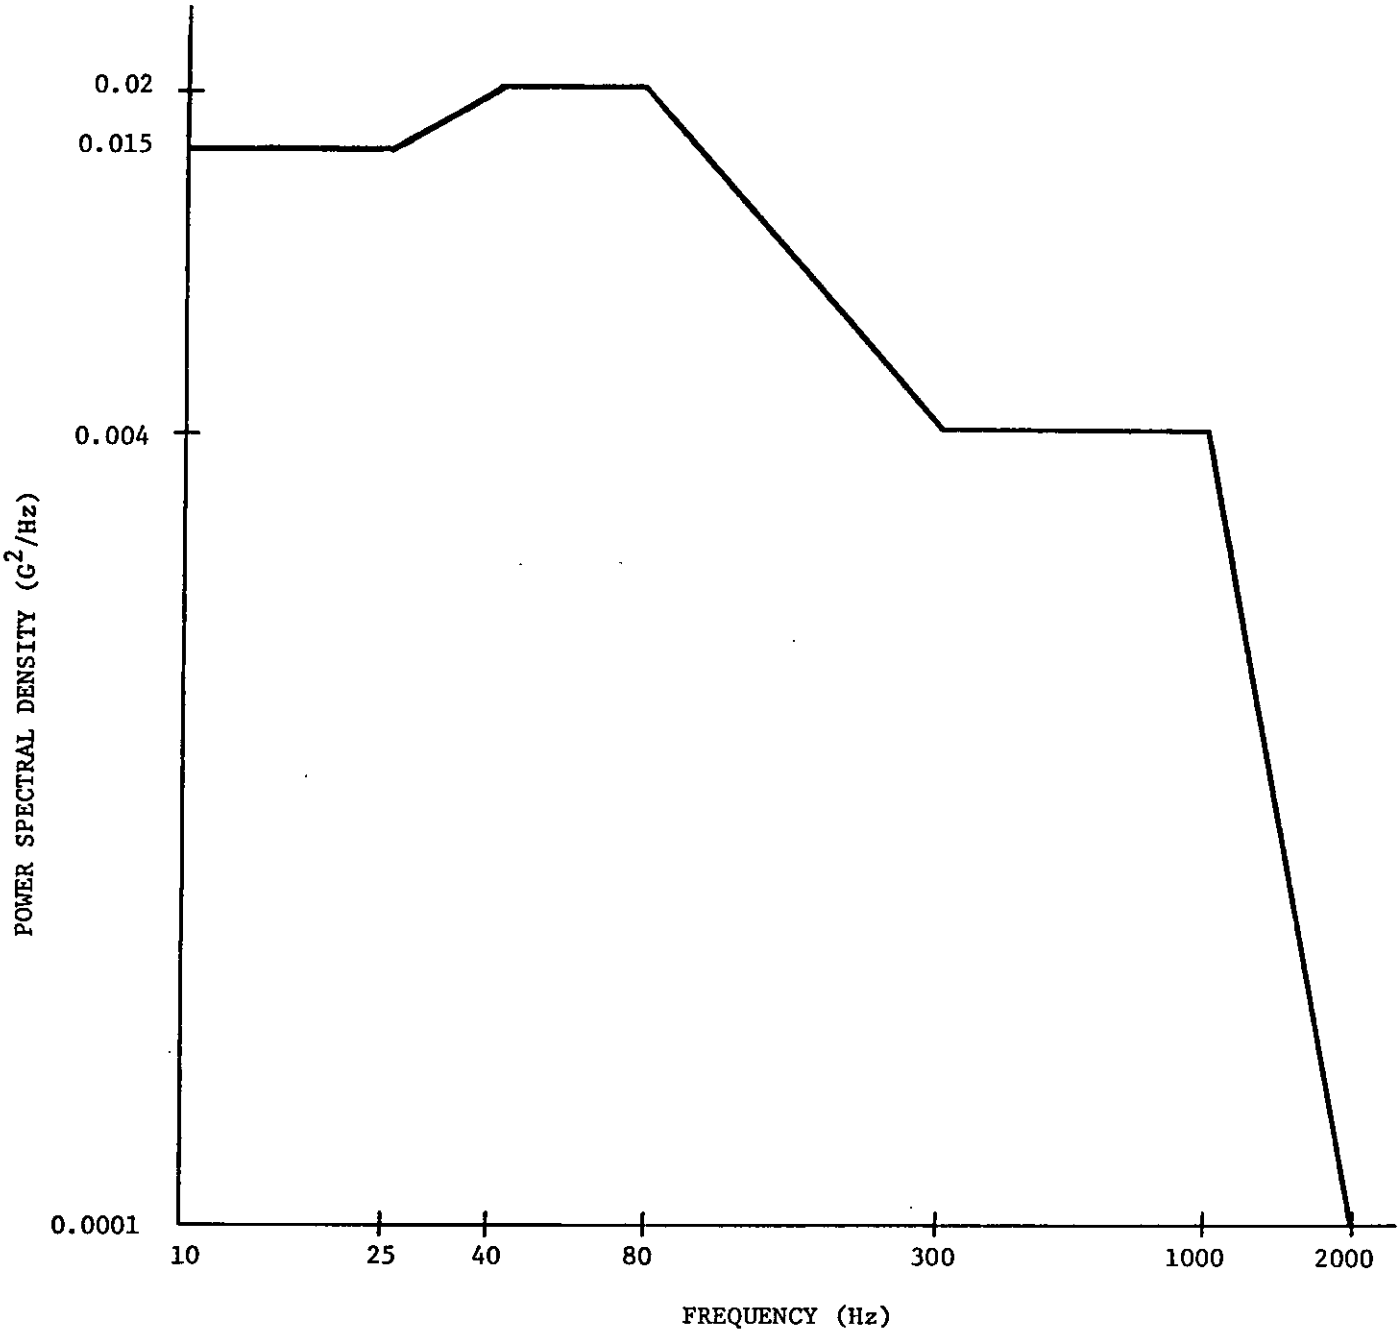


Figure 4. Surface and Air Transportation Vibration

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

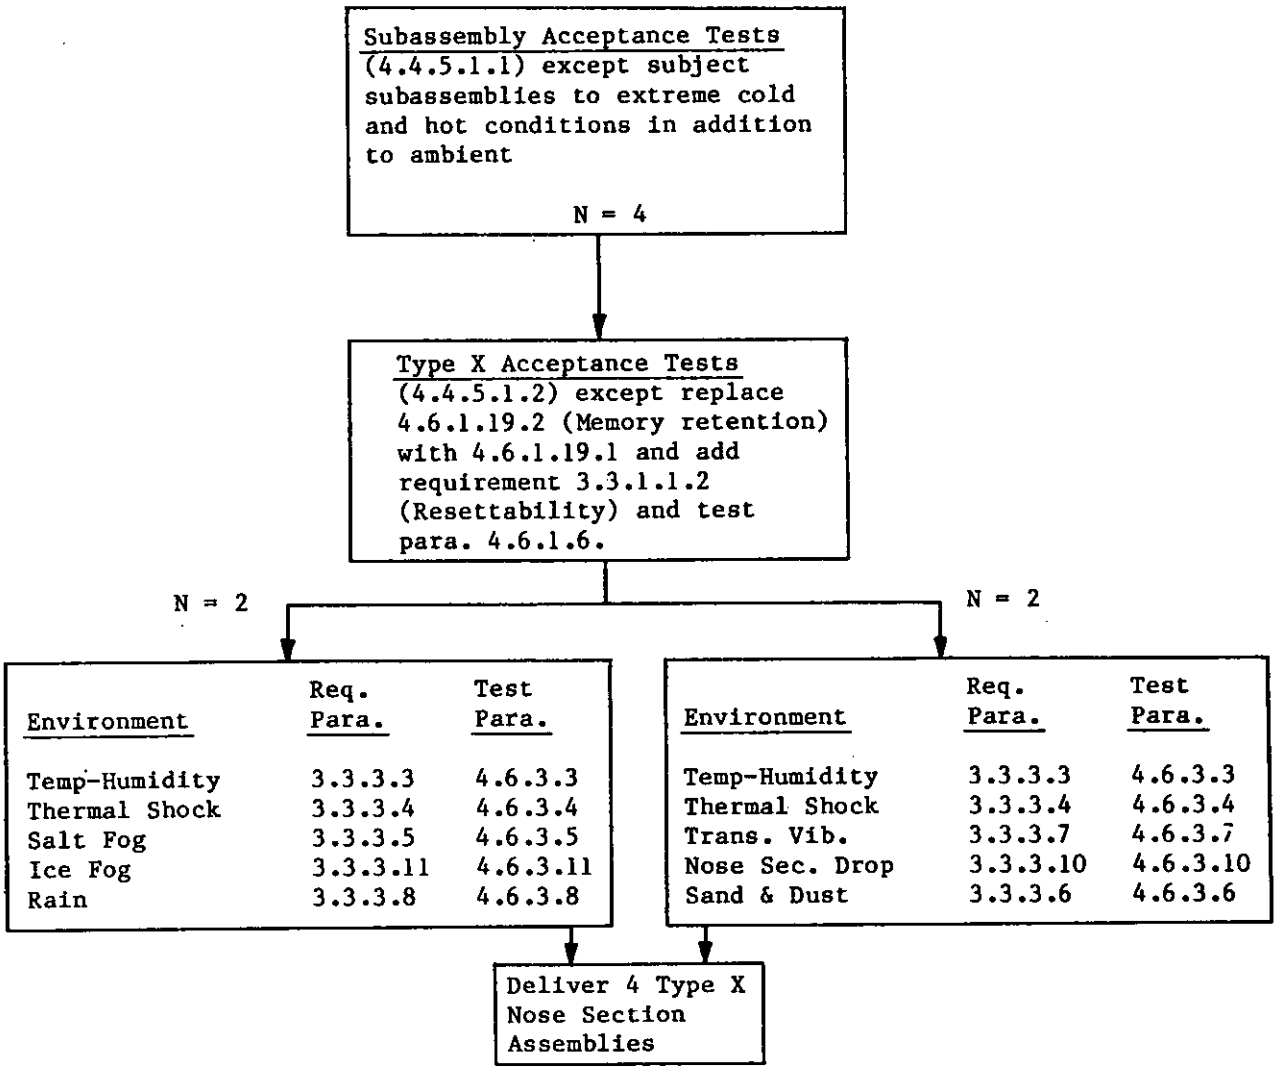


Figure 5. First Article Approval Sample Test Plan

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AR

Preparing Activity:
Army - AR

Project Number: 1390-A480

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT MUNITIONS & CHEMICAL COMMAND
ATTN: AMSMC-TDA S(D)
DOVER NJ 07801-5001

Source: https://assist.dla.mil - Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-48707A	TRAINER, FIELD ARTILLERY: M735 FUZE NOSE SECTION, TYPE X

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:37Z
Check the source to verify that this is the current version before use.