MIL-R- 45667 (Ord)
22 April 1960
SUPERSEDING
FCS-886A
28 February 1958

MILITARY SPECIFICATION

REGULATOR, VOLTAGE: CN-281/M

1. SCOPE

1.1 This specification covers one type of voltage regulator having a low impedance supply of plus or minus 250 and plus 150 volts. The voltage regulator, hereinafter referred to as "regulator", provides regulated voltage to various circuits of the radar unit. The regulator is used with antiaircraft and guided missile fire control systems. (See 6.1)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-F-14619	Fire Control Parts, Equipment and Tools; Packaging of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts

FSC 1285

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

DRAWINGS

Ordnance Corps

D7614352	Regulator, Voltage: CN-281/M Schematic Diagram
E7620552	Regulator, Voltage: CN-281/M

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Production model.- At the beginning of production, one regulator representative of production, shall be made available to the Government to determine if the regulator meets all requirements of this specification.

3.2 Materials.- Materials shall be in accordance with drawings, material specifications and general specifications forming a part of this specification.

3.3 Construction.- The regulator shall be manufactured in accordance with Drawing E7620552, "Regulator, Voltage : CN-281/M" and drawings pertaining thereto. The requirements of this specification are detailed only to the extent considered necessary to obtain the desired mechanical and electrical characteristics, performance and permanence to insure inherent quality and performance capabilities prior to final acceptance by the Government.

3.4 Ground potential.- The design and construction of the regulator shall insure that all external parts are at ground potential at all times.

3.5 General specification.- The contractor shall be responsible for adherence to, and compliance with, the following requirements of Specification MIL-F-13926:

(a) Order of precedence
(b) Protective finished surfaces
(c) Special accuracy
(d) Finish, painting and protective
(e) Electron tubes
(f) Workmanship

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

3.6 Environmental.

3.6.1 Operating temperatures.- The regulator shall meet all the performance requirements of this specification when thermally stabilized at ambient temperatures of minus 40 degrees and plus 150 degrees Fahrenheit.

3.6.2 Storage temperatures.- The regulator shall show no evidence of physical failure and shall meet all performance requirements of this specification at standard ambient temperature (plus 60 to 90 degrees Fahrenheit) after having been thermally stabilized at ambient temperatures of plus 160 degrees and minus 80 degrees Fahrenheit.

3.6.3 Vibration.- The regulator shall not be damaged or adversely affected and shall meet all the requirements of this specification after being subjected to a constant acceleration of 2.5 gravitational units for 3 minutes at each of the four most severe resonant frequencies. The four most severe resonant frequencies shall be determined by proper instrumentation during exposure to two vibratory cycles of 15 minutes duration each over the frequency range of 5 to 500 cycles per second (cps).

3.7 Electrical.

3.7.1 Circuitry.- The circuitry of the regulator shall be in accordance with electrical schematic, Drawing D7614352.

3.7.2 Dielectric strength.- There shall be no puncture of insulation, no sparkover, or decrease in dielectric strength when the insulated areas of the regulator are subjected to an alternating current (ac) root mean square (rms) potential of 1000 volts plus twice the rated voltage at a frequency of 60 (cps) for a period of not more than 30 seconds nor less than 5 seconds.

3.7.3 Insulation resistance.- Unless otherwise specified on applicable drawings, all insulation between ungrounded circuits and ground and between isolated circuits, shall have a minimum resistance of 100 megohms with 500 volts direct current (dc) applied.

3.8 Performance.- When set-up in accordance with pretest information specified in Section 4, the regulator shall meet the following requirements (all symbols referred to in the following paragraphs are those shown on Drawing D7614352 or on figure 1).

3.8.1 Connector, 250-volt (plus 320-volt input)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

3.8.1.1 Output voltage.- The output voltage at pin 4 of P1 shall be 250 plus or minus 8 volts, when a plus 320 volts is applied to pin 8 of P1. (Switch S6 shall be closed).

3.8.1.2 Output current.- The output current shall be 0.45 plus or minus 0.05 ampere (amp), when S2 is on position 2 and 0.2 plus or minus 0.02, when S2 is on position 1. There shall be no perceptible permanent change in the output voltage.

3.8.1.3 Output ripple.- The output ripple voltage shall be less than 5 millivolts (mv), when S2 is on position 1, S1 on 2 and S5 closed.

3.8.1.4 Output impedance.- The oscillator level shall be capable of adjustment for 1.0 volt, when S1 is on position 3, S5 open and the oscillator frequency at 3 kilocycles (kc).

3.8.1.5 The voltage at the regulator terminals at 3, 10, 30, and 100 kc shall be within the limits specified below, when S1 is on position 2 and the oscillator set to maintain the driving voltage at 1 volt:

FREQUENCY	REGULATOR TERMINALS AC VOLTAGE MILLIVOLTS
3	1.7 (max)
10	1.9 (max)
30	2.5 (max)
100	6.0 (max)

3.8.2 Connector, 150-volt(plus 220-volt input)

3.8.2.1 The voltage output at pin 4 of P1 shall be 150 plus or minus 5 volts, when a plus 220 volts is applied to pin 8 of P1.

3.8.2.2 The output current shall be 0.45 plus or minus 0.05 amp, when S2 is on position 3.

3.8.2.3 The output current shall be 0.27 plus or minus 0.03 amp, when S2 is on position 2. There shall be no perceptible permanent change in the output voltage.

3.8.2.4 Output ripple.- The output ripple voltage shall be less than 5 mv, when S2 is on position 2, S5 closed, and S1 on position 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

3.9 Identification marking.- Identification marking unless otherwise specified shall be in accordance with Standard MIL-STD-130.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor inspection.- Unless otherwise specified herein, the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order.

4.2 Contractor's quality assurance system.- The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the supplies under this contract. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when it provides:

(a) The quality assurance required by the applicable drawings and specifications listed in the contract or order.

(b) Contractor's quality standards of acceptability.

(c) Procedure for continually evaluating product quality.

(d) Procedure for continually reporting evidence of actual product quality.

(e) Measures for preventing any significant departure of product quality from standards.

4.2.1 The contractor will not be restricted to the inspection station or to the method of inspection listed, provided that an equivalent control is included in the approved quality assurance procedure. In cases of dispute as to whether or not certain procedures of the system provide equal assurance, the comparable procedure of this specification shall be used. The contractor shall notify the Government of, and obtain approval for, any change to the written procedure that might affect the degree of assurance required by this specification or other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

4.3 Government verification.- All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of (a) surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied and (b) Government product inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might have an affect upon the quality of the product, will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered shall be cause for suspension of acceptance until correction has been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor will designate a responsible official or officials to whom the Government inspector will report such instances.

4.4 Production model.

4.4.1 Unless otherwise specified in the contract, one unit taken from the production run shall be tested by the contractor under the surveillance of the Government.

4.4.2 The tests shall be conducted at the contractor's facility using test equipment designed or procured for use on the remaining items.

4.4.3 The model shall meet all the requirements of this specification using the inspection method prescribed herein.

4.4.4 Disposition of rejected production model.- Should the production model fail to pass the test for Government acceptance, the contractor shall cease those operations which are causing rejectable material and make the necessary corrections. When corrections have been made, a new production model shall be tested by the contractor under the surveillance of the Government. Operations causing rejections shall not be resumed until a production model has successfully passed all inspections specified.

4.5 Inspection provisions.

4.5.1 Inspection of components.- Contractor's inspection for all components shall be in accordance with the inspection procedures of the written inspection plan specified by 4.2 and 4.2.1. The plan shall include procedures for checking all positional and functional characteristics shown on the drawings which indicate precision requirements that have a bearing on the functional accuracy and performance of the unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

4.5.2 Sampling inspection.- Sampling inspection of components may be used in lieu of 100 percent inspection, and shall be in accordance with Table I.

TABLE I - SAMPLING PLAN

Lot Size Inclusive	Sample Size	Accept Lot	Reject Lot
0 - 25	Use 100% Inspection		
26 - 35	20	0	1
36 - 50	25	0	1
51 - 150	30	0	1
151 - 300	30	1	2
301 - Over	60	2	3

4.5.3 Disposition of rejected lots.- Acceptance and rejection numbers are expressed in terms of defective units. One or more defects on any unit shall constitute a defective unit. All rejected lots shall be screened for all defective characteristics. After corrections have been made and the Government inspector informed of the corrected action taken, the lot shall be resubmitted for acceptance inspection of the characteristics that caused the lot to be rejected.

4.6 Inspection testing.

4.6.1 Control of materials.- Materials shall be tested to determine conformance to contractually applicable specifications. Such tests may be conducted in the prime contractor's or subcontractor's facilities, or in other suitable equipped laboratories. The test results shall be available to the Government inspector for review. Cerified test reports, identifiable with the material, may be accepted in lieu of repeated tests. The Government reserves the right, in any case, to require retests to assure that the materials are acceptable.

4.6.2 Lot formation.- Unless otherwise specified by the contracting officer, or his representative, inspection lot sizes and lot formation shall be in accordance with Standard MIL-STD-105.

4.6.3 Acceptance tests.

4.6.3.1 Classification of defects.- The classification of defects in Tables II, III, and IV shall constitute the minimum inspection requirements of voltage regulators to be performed by the contractor prior to acceptance or rejection by lot. The Government reserves the right to inspect for any applicable requirement, and to reject individual non-conforming items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

4.6.3.2 Disposition of rejected lots.- Rejected lots shall be screened for all defective characteristics. After corrections have been made and the Government inspector informed of the corrective action taken, the lot shall be resubmitted for acceptance as outlined in Standard MIL-STD-105.

TABLE II - CLASSIFICATION OF DEFECTS

For normal inspection Level L5, and Sampling Plan Table IV-A of Standard MIL-STD-105

AQL value is expressed in percent defective.

MAJOR: AQL 4.0	Req't Par.	Q.A. Par.	Test Method
1. Operating temperatures	3.6.1	4.8.1.1	DST
2. Storage temperatures	3.6.2	4.8.1.2	DST
3. Vibration	3.6.3	4.8.1.3	DST

TABLE III - CLASSIFICATION OF DEFECTS

For normal inspection Level II, and Sampling Plan Table IV-A of Standard MIL-STD-105

AQL value is expressed in percent defective

MAJOR: AQL 1.0	Req't Par	QA Par.	Test Method
1. Completeness of assembly	3.3	4.8.4	Visual-Tactile
2. Continuity	3.7.1	4.8.2.1	SME
3. Dielectric strength	3.7.2	4.8.2.2	SME
4. Insulation resistance	3.7.3	4.8.2.3	SME
5. Connector, 250-volt (plus 320-volt input)	3.8.1	4.8.3.2	SME
6. Connector, 150-volt (plus 220-volt input)	3.8.2	4.8.3.3	SME
7. Identification marking	3.9	4.8.5	Visual

4.7 Inspection equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

4.7.1 Contractor provisions.- Unless otherwise specified in the contract, the contractor shall provide and properly utilize all gaging, measuring, and testing equipment of the required accuracy for the performance of all inspection examinations and tests required to be performed by the contractor under this contract. The contractor shall be responsible for the maintenance of the equipment including surveillance, calibration, and rehabilitation, on a regularly scheduled basis, and shall have available, all calibration equipment and other instrumentation essential for calibration and certification of the inspection equipment. The contractor also shall maintain records of inspection equipment surveillance and calibration, and shall make these records available for review by the Government. The Government reserves the right to certify inspection equipment, and to use it for Government verification inspection or acceptance inspection.

4.7.1.1 Accuracy requirements.- Inspection equipment which incorporates features for measuring values or sizes, established by product requirements, shall be capable of measuring these values within an accuracy of ten percent of the specified tolerance. In cases where the ten percent accuracy imposes impractical or very difficult design and fabrication problems, or results in a test equipment cost factor which is exorbitant in relation to the cost and application of the product to be inspected, the Government shall be expeditiously advised in order that necessary appropriate action can be taken.

4.7.1.2 In addition to the above accuracy requirements, the test equipment and the related testing components prescribed below shall conform to the following:

Item No.	Requirement
1.	Ammeter, 0 to 0.5 ampere dc plus or minus 5 percent.
2.	Voltmeter, 0 to 500 volts dc plus or minus 1 percent.
3.	Voltmeter Electronic ac plus or minus 2 percent, voltage range: 0.001 to 100 volts root mean square.
4.	Audio oscillator, 1 to 200 kilocycles, distortion less than 0.5 percent, frequency response plus or minus 1 db reference 1 kilocycle.
5.	Resistor, 700 ohms plus or minus 5 percent, 70 watts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

Item No.	Requirement
6.	Resistor, 220 ohms, plus or minus 5 percent, 60 watts
7.	Resistor, 330 ohms plus or minus 5 percent, 90 watts
8.	Resistor, 100 ohms plus or minus 5 percent, 1 watt
9.	Resistor, 200 ohms plus or minus 5 percent, 50 watts
10.	Resistor, 10,000 ohms plus or minus 5 percent, 1/2 watt (2 req'd)
11.	Resistor, 5 megohms plus or minus 5 percent, 1/2 watt (2 req'd)
12.	Resistor, 1100 ohms plus or minus 5 percent, 50 watts
13.	Capacitor, 1.0 microfarad plus or minus 10 percent, 350 volts (2 req'd)
14.	Capacitor, .25 microfarad plus or minus 5 percent, 350 volts
15.	Capacitor, 0.007 microfarad plus or minus 5 percent, 100 volts
16.	Capacitor, 0.01 microfarad plus or minus 10 percent, 350 volts
17.	Capacitor, 0.2 microfarad plus or minus 10 percent, 350 volts
18.	Power supply, 120 volts, plus or minus 5 volts, 0.5 ampere, 400 cycles per second
19.	Power supply, plus 320 volts, plus or minus 5 volts, 1.0 ampere, impedance of 10 ohms or less at dc and less than 1 ohm from 3 kilocycles to 100 kilocycles
20.	Switch, single pole, three position (S1)
21.	Switch, double pole, four position (S2)
22.	Switch, four pole, double throw(S3)
23.	Switch, double pole, single throw (S4)
24.	Switch, single pole, single throw (2 req'd) (S5, S6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

4.8 Test methods and procedures.

4.8.1 Environmental.- The test equipment used in conducting the temperature tests shall be such that the units under test shall not exceed fifty percent of the internal volume of the test chamber, and no portion shall be closer than six inches from any surface of the chamber.

4.8.1.1 Operating temperatures.- The units being tested shall be installed in a test chamber in a manner similar to its normal operating position. The regulator shall be exposed to the conditions specified in 3.6.1 by means of a cold chest and an oven capable of maintaining the specified temperatures until the unit under test is thermally stabilized. When thermal stabilization of the unit is reached at the specified conditions respectively, the unit under test shall then be inspected to determine conformance with the requirements specified in 3.6.1.

4.8.1.2 Storage temperatures.- The regulator to be tested shall be installed in a test chamber in a manner similar to its normal operating position. The test shall then be conducted in accordance with Procedure II of Specification MIL-F-13926, to the conditions specified in 3.6.2. Upon completion of the specified exposure, the unit under test shall show no evidence of damage by a visual and tactile examination. The regulator shall then be inspected to determine conformance with the requirements specified in 3.6.2.

4.8.1.3 Vibration.- The regulator to be tested shall be mounted on a vibrating machine capable of producing and including a constant acceleration of the specified gravitational units at three minute intervals at each of the four most severe resonant frequencies. The testing machine shall be equipped to provide a variable cycling range from 5 to 500 to 5 cycles per second and shall be adjustable to any chosen intermediate range. The machine shall be equipped with a medium to assure that mounting is free from resonances over the test frequency range. The medium shall hold the unit under test rigidly in its normal operating position. The measuring instruments of the test equipment shall be capable of measuring the frequency within plus or minus two percent.

4.8.1.3.1 The unit under test shall be securely mounted, and shall be subjected to the vibration test varying between the specified range of 3.6.3. The applied vibratory acceleration shall be as specified. The frequency cycle may be continuous within the specified range or in steps. However, the rate of change shall be such that two cycles will consume thirty minutes to establish the four most severe resonant frequencies. When resonance is detected, the unit under test shall be vibrated for three minutes at each of the four severe resonant frequencies observed. This procedure shall be performed in each of three mutually perpendicular directions. Upon completion of the test the unit shall show no loose parts or evidence of damage by a visual and tactile examination. The unit then shall be subjected to the tests specified in 4.8.2.1 to 4.8.3.3 inclusive, and shall meet the requirements specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

4.8.2 Electrical.

4.8.2.1 Circuitry.- The voltage regulator shall be tested using standard measuring equipment to demonstrate the continuity of the circuits to determine conformance with the requirements of 3.7.1.

4.8.2.2 Dielectric strength.- The voltage regulator shall be tested in accordance with method 301 of Standard MIL-STD-202, except that the duration of application of the test voltage shall comply with 3.7.2 to determine conformance with the requirements specified.

4.8.2.3 Insulation resistance.- Immediately after satisfactorily withstanding the test for dielectric strength, the voltage regulator shall be given the insulation test in accordance with method 302, test condition B, of Standard MIL-STD-202, to determine conformance with the requirements of 3.7.3.

4.8.3 Performance.

4.8.3.1 Pretest information.- The switches of the test circuit shall be set as follows: switch S6 open, switch S1 to 2, switch S3 to 1, and switch S5 closed. The oscillator (item 4) shall be set for zero output, the voltage regulator shall be connected to the test circuit and switch S4 shall be closed.

4.8.3.2 Connector, 250-volt (plus 320-volt input).

4.8.3.2.1 Output voltage.- With switch S6 closed and a plus 320 volts applied to pin 8 of P1, the output voltage at pin 4 of P1 as measured on voltmeter item 2 shall meet the requirements of 3.8.1.1.

4.8.3.2.2 Output current.- With switch S2 in position 2, the output current as measured on ammeter item 1 shall meet the requirement specified. With switch S2 in position 1, the output current measured shall meet the requirement of 3.8.1.2. There shall be no perceptible permanent change in output voltage as measured by voltmeter item 2.

4.8.3.2.3 Output ripple.- With switch S2 to position 1, switch S5 closed, and switch S1 at 2, the output ripple voltage measured on voltmeter item 3 shall meet the requirement of 3.8.1.3.

4.8.3.2.3 Output impedance.- With switch S1 on position 3, switch S5 open, and the oscillator frequency at 3 kilocycles, the oscillator level shall be adjusted for the requirement of 3.8.1.4 as measured by the voltmeter item 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

4.8.3.2.4 With the switch S1 in position 2 and with readjustments of the oscillator as required to maintain the drawing voltage of 1 volt, the voltage at the regulator terminals at 3,10, 30, and 100 kilocyles shall be within the specified limits of 3.8.1.5.

4.8.3.2.5 The oscillator output shall be reduced to zero.

4.8.3.3 Connector, 150-volt (plus 220-volt input).

4.8.3.3.1 With switch S6 open, the following settings shall be made: switch S1 to 2, switch S2 to 3, and switch S3 to 2.

4.8.3.3.2 With switch 2 closed and a plus 220 volts applied to pin 8 of P1, the output voltage at pin 4 of P1 as measured on the voltmeter shall meet the requirements of 3.8.2.1.

4.8.3.3.3 With switch 2 in position 3, the output current as measured by ammeter item 1 shall meet the requirements of 3.8.2.2.

4.8.3.3.4 With switch 2 in position 2, the output current measured by the ammeter shall meet the requirement specified in 3.8.2.3. There shall be no perceptible permanent change in the output voltage as indicated on voltmeter item 2.


4.8.3.3.5 Output ripple.- With switch S2 in position 2, switch S5 closed, and Switch S1 at position 2, the output ripple voltage as indicated on the voltmeter item 2 shall meet the requirement of 3.8.2.4.

4.8.4 Check for completeness.- The finished unit shall be checked against the assembled view drawings to ascertain that all parts shown on the drawings and listed on the list of parts have been assembled, and that all locking and fastening screws, nuts, etc., are in place and secured as required by the drawings and specifications.

4.8.5 Identification marking.- Marking shall be visually inspected for conformance to Standard MIL-STD-130.

4.8.6 Packaging and packing.- The quality assurance provisions for the preservation, packaging and packing of the regulator shall be in accordance with the prescribed specification in 5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

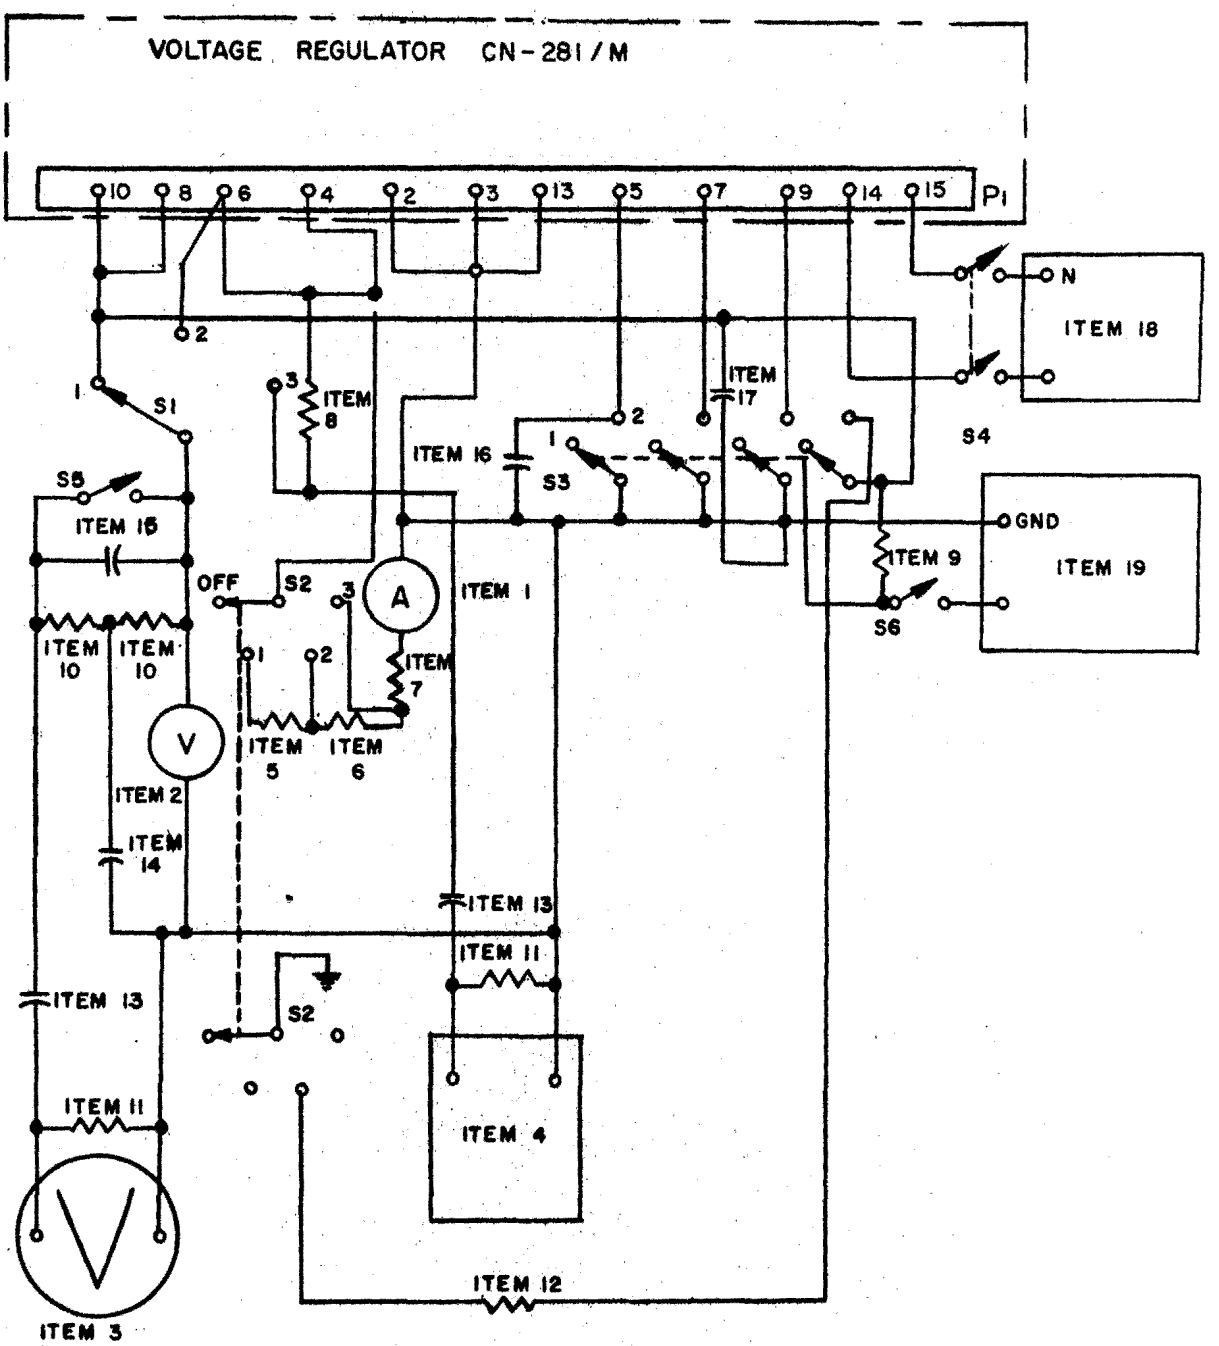

SUGGESTED TEST CIRCUIT

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing.- The regulator shall be cleaned, preserved, packaged, packed, and marked in accordance with Specification MIL-F-14619 P7304. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use.- The regulator is intended to supply low impedance plus or minus 250 or plus 150 regulated volts to various circuits of the radar unit for plate supply and bias sources. The regulator is a component of the following assemblies and systems:

Assembly	System
Radar Set Group 7620243	Antiaircraft Fire Control System M33C (90mm) and M33D (120mm)
Director Station Group OA-711/MSA-7 Power Supply Group OA-730/MPA-4	Radar Course Directing Central AN/MSW-1
Control Power Supply Group OA-605/MSG-3 Modulator Group Missile Guidance OA-608/MSG-3	Guided Missile Fire Control System AN/MSG-3
Test Cabinet Assembly 7622245	M33 Ord 6 Test Equipment

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Selection of applicable levels of packaging and packing.

(c) Applicable stock number.

(d) Provisions for production model including date of delivery (see 3.1).

6.3 Definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.

6.3.1 Standard measuring equipment (SME).- Standard measuring equipment (SME) is defined as the common hand type measuring devices which are usually stocked by commercial supply houses for ready supply (shelf items), and which are normally used by an inspector to perform dimensional inspection of items under procurment. This category also includes commercial testing equipment such as meters, optical comparators, and so forth.

6.3.2 Device, special testing (DST).- Special testing devices are defined as special inspection fixtures, instruments, and modified standard measuring equipment.

6.3.3 Tactile.- Skillful manipulation or sensing.

6.4 Design information.- Design information regarding specific equipment not covered or referenced by the specification may be obtained from the procuring activity upon the specific request of the contractor.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder, or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any invention that may in any way be related thereto.

Custodian:

Army- Ordnance Corps

Preparing Activity:

Army-Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:41Z
Check the source to verify that this is the current version before use.