MIL-A-52879B
21 April 1980
SUPERSEDING
MIL-A-52879A(ME)
19 July 1977

MILITARY SPECIFICATION

ALARM, AUDIBLE

BZ-204/FSS-9(V)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an audible alarm, which is a local notification device for the Joint-Services Interior Intrusion Detection System (J-SIIDS).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-781 - Strapping, Steel, and Seals.

☆U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/2094

FSC 6350

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-676	- Boxes, Setup.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-C-22751	- Coating System, Epoxy-Polyamide, Chemical and Solvent Resistant: Process for Application of.
MIL-C-45662	- Calibration System Requirements.
MIL-C-52853	- Control Unit, Alarm Set: C-9412/FSS-9(V).

STANDARDS

FEDERAL

FED. STD. NO. 595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-454	- Standard General Requirements for Electronic Equipment.
MIL-STD-461	- Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-781	- Reliability Design Qualification and Production Acceptance Tests: Exponential Distribution.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

TA13220E3700	- Alarm, Audible, BZ-204/FSS-9(V).
TA13220E3701	- Electronics Assembly.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Description. The audible alarm (hereinafter called AA) shall be in accordance with Top Assembly TA13220E3700, and as specified herein.

3.1.1 Major components. The major components of the AA are as follows:

(a) Enclosure.
(b) Primary power supply.
(c) Emergency power supply.
(d) Electronics Module Assembly (EMA), TA13220E3701.
(e) Sounding device.

When specified (see 6.2), any of the major components shall be furnished separately.

3.1.2 Function. The AA is activated by a signal from a control unit conforming to MIL-C-52853, via hardware lines or by internal circuits for internal tampering alarms. The AA is activated whenever an unauthorized entry is made into a secured area, or when an attempt is made to pry the AA from its mounting surface.

3.1.3 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the AA or major components (when furnished separately). Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.2 First article (preproduction model). The contractor shall furnish one or more AA's and major components (when furnished separately), as specified (see 6.2), for examination and testing within the time frame specified (see 6.2), to prove prior to starting production that his production methods will produce AA's and major components (when furnished separately), that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4; and, unless otherwise specified herein, all examinations and tests shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examination and tests, as specified (see 6.2).

3.3 Initial production. When specified (see 6.2), the contractor shall furnish to the Government one or more AA's and EMA's (when furnished separately), for inspection as specified in 4.4.

3.4 Material. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

3.5 Environmental conditions. When tested as specified in 4.6.2.9, the AA and EMA (when furnished separately), shall withstand individual or probable combinations of the environmental conditions specified herein without mechanical or electrical damage (see 6.4.2) or performance degradation.

3.5.1 Operational.

(a) Temperature range of -20° F to +150° F.
(b) Humidity up to 95 percent relative.
(c) Adverse weather-rain and salt fog when tested as specified in 4.6.2.9.4 and 4.6.2.9.5.

3.5.2 Nonoperational and storage.

(a) Temperature range of -30° F to +165° F.
(b) Humidity up to 95 percent relative.
(c) Shock:

(1) 20 times the acceleration due to gravity (g's), for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

11 milliseconds (ms) duration, transportation conditions (without battery).

(2) Bench handling - equipment not operating (with battery).

(d) Vibration - transportation conditions (without battery).

3.6 Detailed technical requirements.

3.6.1 Tamper protection. Contacts shall open not less than 0.125 inch nor more than 0.250 inch of cover movement and before the door flanges are disengaged.

3.6.2 Terminal group connections. Two terminal groups shall be marked with identifying terminal numbers as shown:

Terminal Group L1	Function
1	Power, ac (high)
2	Power, ac (neutral)
3	Ground

Terminal Group L2	Function
1	Alarm input
2	Signal common
3	AA tamper output
4	Spare
5	Spare

3.6.3 Primary power supply. The primary power supply shall provide 24 volts direct current (Vdc) power for the operation of the unit. The primary power supply shall utilize 110-125 volts, 48-62 hertz (Hz) alternating current (ac) power as its primary power input which shall be converted to 24 volts through an isolation transformer and battery-charging network. The primary power to the supply shall be fused.

3.6.4 Emergency power supply. The emergency power supply shall be a 24 volt, sealed, gelled electrolyte, rechargeable battery floating on the output of the battery-charging network. The emergency power supply shall provide power to the AA for a period of not less than 15 minutes of alarm operation at 0° F. It shall recharge to 90 percent full charge within 24 hours after the 15-minute operating time at 0° F. The primary power supply

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

shall power an AA while recharging the emergency power supply. Batteries should be fully charged prior to shipment at the depot. The date of charging shall be marked on the box.

3.6.5 Electronics module assembly.

(a) The AA shall not sound when a voltage of 4 volts minimum (but not exceeding 5 volts) is applied between the alarm input and common. Internal impedance between these terminals shall be 3 kilohms (k ohms) ±5 percent. The AA shall sound when the voltage at this terminal is reduced to less than 1.0 volt.

(b) The AA, with tamper circuit closed (non-alarm), shall provide a voltage between +4.5 and +5.5 Vdc across the tamper terminals. The load impedance presented to these terminals by the control unit shall be 3k ohms, ±5 percent. The voltage across the tamper terminals shall be reduced to less than +1.0 Vdc when either tamper switch is open, the sounding device is sounding, or the resistance between the inner and outer housings decreases to less than 10k ohms.

(c) The output of the EMA shall have the following characteristics:
   (1) Power output shall be 14 ±0.5 watts across an 8 ohm resistive load.
   (2) Frequency output shall range from 500 to 2000 Hz ±100 Hz modulated by a ramp voltage period of 1.7 ±0.2 seconds.

3.6.6 Sounding device. The sounding device, when installed in the enclosure, shall comply with the following requirements when operating on either primary or emergency power:

(a) The alarm sound level shall be a minimum of 108 decibels (measured with weighting Scale A, based on a reference level of 0.0002 microbars) (dB(A)) at 85 percent of nominal battery voltage at a distance of 10 feet on the acoustic axis.

(b) The characteristic sound of the alarm shall be a nonsinusiodal modulated tone swept through a frequency range of approximately 500 to 2000 Hz in a period selected to yield a distinctive, attention-getting alarm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.7 Reliability. The AA and EMA (when furnished separately), shall demonstrate a Mean-Time-Between-Failure (MTBF) of 10,000 hours when tested as specified in 4.6.2.11.

3.8 Electromagnetic susceptibility. The electromagnetic susceptibility characteristics of the AA and EMA (when furnished separately), shall conform to MIL-STD-461, Test Methods RS03, CS01, CS02, and CS06, as modified in 3.8.1 and 3.8.2.

3.8.1 Radiated. Radiated susceptibility, Method RS03, shall be conducted in an electric field of 3 volts per meter (V/m) for both steady-state and keyed conditions of the electromagnetic interference (EMI) field generating equipment. This field applies to frequencies up to 500 megahertz (MHz). Above 500 MHz, the electric field is 1 V/m.

3.8.2 Conducted. Conducted interference signals shall be applied to both power lines and signal lines as follows:

(a) Continuous wave, 30 Hz to 400 kilohertz (kHz).
(b) Interfering spike voltage, 10 spikes 5 to 10 microseconds wide at a repetition rate of 7 to 10 pulses per second on input power leads only. Random phasing of the spikes with respect to the powerline frequency shall be employed.

3.9 Identification marking. The AA and major components shall be identified in accordance with MIL-STD-130.

3.10 Treatment and painting. Unless otherwise specified (see 6.2), the portions of the AA normally painted shall be cleaned, treated, and painted in accordance with MIL-C-22751. Color shall be lusterless gray conforming to FED. STD. No. 595, Color No. 36440. Nonpermissible galvanic couples (dissimilar metals) as specified in MIL-T-704 shall be insulated as specified in MIL-T-704.

3.11 Government-loaned property. Unless otherwise specified (see 6.2), the following property in the quantity indicated will be loaned by the Government (see 6.9):

Description	Identification	Quantity
Alarm, Audible	BZ-204/FSS-9(V) NSN 6350-00-228-2514	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.12 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Interchangeable parts are defined as two or more like parts possessing such functional and physical characteristics as to be equivalent in performance and durability and capable of being exchanged one for the other without alteration of the parts themselves or of adjoining parts, except for adjustment, and without selection for fit or performance.

3.13 Workmanship. Workmanship shall be in accordance with MIL-STD-454, Requirement 9.

3.13.1 Soldering. All soldering shall be performed in accordance with MIL-STD-454, Requirement 5.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.1.2 Disassembly inspection. Failure of any test by the preproduction model shall be cause for disassembly, in the presence of a Government representative, of the preproduction model to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected and shall be cause for rejection of the preproduction model. Reassembly with replacement parts and retesting shall be the responsibility of the contractor. Government-loaned property shall be excluded from the requirements of this paragraph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.1.3 Parts and components. Parts and components detailed on the drawings shall be inspected in accordance with the supplementary quality assurance provisions (SQAP) shown on the drawings. The drawings specify the characteristics requiring SQAP inspection, the sampling plan, and the basis for acceptance and rejection (see 6.4.3 and 6.5).

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Initial production inspection (see 4.4).
(c) Quality conformance inspection (see 4.5).
(d) Inspection comparison (see 4.7).
(e) Inspection of packaging (see 4.8).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction AA and major components (when furnished separately), shall be examined as specified in 4.6.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests.

4.3.2.1 Assembled AA. The assembled AA shall be subjected to the tests marked "X" in Column 1 of Table I. Failure of any test shall be cause for rejection or for performing the disassembly inspection specified in 4.1.2.

4.3.2.2 Major components (when furnished separately). The EMA shall be subjected to the tests marked "X" in Column 1 of Table II. Failure of any test shall be cause for rejection or for performing the disassembly inspection specified in 4.1.2.

4.4 Initial production inspection. When specified (see 3.3), one or more initial production AA's and EMA's (when furnished separately), will be selected at random by the Government from AA's and EMA's (when furnished separately), produced from production tooling, and will be examined for the defects as specified in 4.6.1 and subjected to the tests marked "X" in Column 2 of Table I or Table II as applicable, to determine conformance to the requirements of this specification. The inspection will be performed by the Government at a site selected by

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

the Government. Acceptance of the initial production AA's and EMA's (when furnished separately), shall not exclude the remaining AA's and EMA's (when furnished separately), from the quality conformance inspection and acceptance provisions specified in Section 4. In addition to any test specified as part of the initial production test, the Government reserves the right to conduct any and all other tests contained in this specification as part of the initial production test and failure of such additional tests shall have the same effect as failure of those tests specified as initial production tests.

4.4.1 Inspection failure. Failure of an initial production AA or EMA (when furnished separately), to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for rejection of the initial production AA's and EMA's (when furnished separately) and shall be cause for refusal by the Government to continue acceptance of production AA's and EMA's (when furnished separately) until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on AA's and EMA's (when furnished separately) previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all AA's and EMA's (when furnished separately) accepted prior to the completion of initial production inspection are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.5.2 Examination.

4.5.2.1 Individual. Each AA and EMA (when furnished separately), shall be examined for the critical defect specified in 4.6.1. Presence of a critical defect shall be cause for rejection.

4.5.2.2 Samples. Samples selected in accordance with 4.5.1 shall be examined for the major defects specified in 4.6.1. AQL shall be 0.4 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.3 Tests.

4.5.3.1 Individual.

4.5.3.1.1 Assembled AA. Each assembled AA shall be subjected to the tests marked "X" in Column 3 of Table I. Failure of any test shall be cause for rejection.

4.5.3.1.2 Major components (when furnished separately). Each EMA shall be subjected to the test marked "X" in Column 3 of Table II. Failure of the test shall be cause for rejection.

4.5.3.2 Samples. Samples selected in accordance with 4.5.1 shall be subjected to the tests marked "X" in Column 4 of Table I, or Table II, as applicable, except that no more than three AA's shall be subjected to the humidity test. AQL shall be 2.5 percent defective.

4.6 Inspection procedure.

4.6.1 Examination. The AA and major components (when furnished separately) shall be examined as specified herein for the following defects:

Critical

1. Welding burn through.

Major

101. Any part or component not in accordance with the SQAP requirements as shown on the drawings.
102. Components missing or not as specified.
103. Assembly not correct.
104. Electromagnetic interference suppression components and network not identical to the approved model.
105. Identification or special marking incorrect, missing, or illegible.
106. Treatment and painting not as specified.
107. Interchangeability not as specified.
108. Workmanship not as specified.
109. Wiring not as specified.
110. Soldering not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2 Tests.

4.6.2.1 Test conditions. Unless otherwise specified herein, tests shall be conducted at prevailing ambient temperature and humidity conditions. Prior to testing, each AA or EMA (when furnished separately) shall be subjected to a 72-hour burn-in in accordance with Appendix Test Method 6. All failures shall be recorded and analyzed for cause of failure. Corrective action shall be taken when appropriate. Copies of these failure reports shall be forwarded to the contracting officer. Units for testing shall be selected from those units having completed the burn-in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2.2 Test schedule.

TABLE I. Test schedule for assembled AA.

Preproduction	Initial production	Quality conformance		Test	Requirement paragraph	Test paragraph
		Individual	Sample			
1	2	3	4	5	6	7
X	X	X	X	Functional.	3.6.3 3.6.4 3.6.5	4.6.2.4
X	X	-	X	Tamper Switch Tolerance.	3.6.1	4.6.2.6
X	X	-	-	Emergency Power.	3.6.4	4.6.2.7
X	X	-	X	Sounding Device.	3.6.6	4.6.2.8
X	X	-	X	Low Temperature.	3.5.1 3.5.2	4.6.2.9.1
X	X	-	X	High Temperature.	3.5.1 3.5.2	4.6.2.9.2
X	X	-	X	Humidity.	3.5.1 3.5.2	4.6.2.9.3
X	X	-	-	Rain.	3.5.1	4.6.2.9.4
X	X	-	-	Salt-fog.	3.5.1	4.6.2.9.5
X	X	-	-	Shock.	3.5.2	4.6.2.9.6
X	X	-	-	Vibration.	3.5.2	4.6.2.9.7
X	X	X	-	Battery Voltage.	3.6.4	4.6.2.10
X	X	-	-	Reliability.	3.7	4.6.2.11
X	X	-	-	Electromagnetic susceptibility.	3.8	4.6.2.12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TABLE II. Test schedule for EMA (when furnished separately).1/

Preproduction	Initial production	Quality conformance		Test	Requirement paragraph	Test paragraph
		Individual	Sample			
1	2	3	4	5	6	7
X	X	X	X	Functional.	3.6.5	4.6.2.5
X	X	-	X	Tamper Switch Tolerance.	3.6.1	4.6.2.6
X	X	-	-	Emergency Power.	3.6.4	4.6.2.7
X	X	-	X	Low Temperature.	3.5.1 3.5.2	4.6.2.9.1
X	X	-	X	High Temperature.	3.5.1 3.5.2	4.6.2.9.2
X	X	-	X	Humidity.	3.5.1 3.5.2	4.6.2.9.3
X	X	-	-	Rain.	3.5.1	4.6.2.9.4
X	X	-	-	Salt-fog.	3.5.1	4.6.2.9.5
X	X	-	-	Shock.	3.5.2	4.6.2.9.6
X	X	-	-	Vibration.	3.5.2	4.6.2.9.7
X	X	-	-	Reliability.	3.7	4.6.2.11
X	X	-	-	Electromagnetic Susceptibility.	3.8	4.6.2.12

1/ Install the EMA in a Government-loaned AA or equivalent to simulate normal environment when installed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2.3 Test methods. Tests shall be conducted in accordance with the Appendix test methods, and as specified herein. Calibration of test equipment shall be in accordance with MIL-C-45662.

4.6.2.4 Functional assembled AA. The assembled AA shall be tested in accordance with Appendix Test Method 1. Nonconformance to 3.6.3, 3.6.4, and 3.6.5 shall constitute failure of this test.

4.6.2.5 Functional EMA. The EMA (when furnished separately) shall be tested in accordance with Appendix Test Method 5. Nonconformance to 3.6.5 shall constitute failure of this test.

4.6.2.6 Tamper switch tolerance. Both the internal and external tamper switches shall be tested in accordance with Appendix Test Method 4. Nonconformance to 3.6.1 shall constitute failure of this test.

4.6.2.7 Emergency power. The assembled AA shall be tested in accordance with Appendix Test Method 2. Nonconformance to 3.6.4 shall constitute failure of this test.

4.6.2.8 Sounding device. The assembled AA, with the inner closure cover plate installed and outer enclosure door closed and locked, shall be tested in accordance with Appendix Test Method 3. Nonconformance to 3.6.6 shall constitute failure of this test.

4.6.2.9 Environmental. The AA and EMA (when furnished separately), shall be subjected to the following environmental tests in accordance with MIL-STD-810. Following each test, conduct the functional test specified in 4.6.2.4.

4.6.2.9.1 Low temperature. Low temperature Test Method 502.1, Procedure I, storage temperature -30° V for not less than 48 hours, equipment operating temperature -20° F.

4.6.2.9.2 High temperature. High temperature Test Method 501.1, Procedure II, except that the nonoperating temperature shall be +165° F. Equipment operating temperature shall be +150° F.

4.6.2.9.3 Humidity test. Method 507.1, Procedure I with the following exceptions:

(a) Step 5 shall be for 5 cycles (not less than 120 hours). Perform measurements at the completion of each cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

(b) During Steps 2 and 3, the relative humidity shall be maintained at 95 percent or greater.
(c) During Step 4, the relative humidity shall be maintained at 92 percent or greater.
(d) Measurement shall commence 1 hour and 15 minutes prior to the completion of each 24 hour cycle. The doors of the AA shall not be opened during measurements. The AA may be removed from the environmental chamber for measurement; however, unsuccessful completion of measurements or unsuccessful return of the AA to the test chamber within 1 hour and 15 minutes subsequent to the initiation of measurements shall constitute failure of the test.

4.6.2.9.4 Rain. Method 506.1, Procedure I.

4.6.2.9.5 Salt-fog. Method 509.1, test at each 24-hour interval.

4.6.2.9.6 Shock.

(a) Basic design: Method 516.2, Procedure I, transportation conditions (without battery), sawtooth shock pulse, peak value 20 g's, duration 11 ms.
(b) Bench handling: Method 516.2, Procedure V, equipment not operating (with battery).

4.6.2.9.7 Vibration. Method 514.2, Procedure X, AX, equipment not operating (without battery).

4.6.2.9.8 Failure criteria. Nonconformance to 3.5 shall constitute failure of these tests.

4.6.2.10 Battery voltage. Battery voltage shall be tested in accordance with Appendix Test Method 2. Nonconformance to 3.6.4 shall constitute failure of this test.

4.6.2.11 Reliability. Using an upper test MTBF (Θ_1) of 10,000 hours and a lower test MTBF (Θ_0) of 5,000 hours, the AA and EMA shall be tested as specified herein, with "accept" and "reject" criteria in accordance with MIL-STD-781, Test Plan VIII C. Continue testing until either an "accept" or "reject" decision is reached. A failure is defined as any malfunction which causes or may cause one or more of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

(a) Failure to commence operation, cessation of operation, or degradation of performance below the designated levels.
(b) Serious damage to the system.
(c) Serious personnel safety hazards.

4.6.2.11.1 Test procedure. The tests shall be conducted under ambient laboratory conditions, without temperature, humidity, or vibration cycling. Equipment shall be energized at the power input specified. Operation shall be continuous throughout the test with all circuits exercised not less than nine times during each 24-hour period. The parameters to be measured shall be in accordance with the Appendix Test Methods. The tests shall commence after installation and a burn-in period of 72 hours as specified in 4.6.2.1. Parts or components of known limited life, such as batteries, shall have a life stipulated prior to test. Failures of these parts occurring after the end of the stipulated period are nonrelevant, but any dependent failures caused thereby are relevant. Failures chargeable to workmanship deficiencies shall be counted as relevant. Alarms not deliberately excited as part of the equipment test routine shall be reported and cause of the alarm identified if practicable. This accounting shall be maintained separately from the failure accounting. Redundant elements, such as indicator lamps, shall not be repaired and not counted as a failure until the AA has failed to perform its intended function. Preventive maintenance procedures specified for the equipment during normal operation shall be performed during the reliability test. No additional preventive maintenance is allowed during the test.

4.6.2.11.2 Failure criteria. Nonconformance to 3.7 shall constitute failure of this test.

4.6.2.12 Electromagnetic susceptibility. The AA and EMA (when furnished separately), shall be subjected to the tests of MIL-STD-461 as follows:

4.6.2.12.1 Radiation. Method RS03. Electric field requirements of RS03 shall be modified and limited as specified in 3.8.1. All leads (sensor, alarm, and power) external to the enclosure shall be exposed to the electric field. The leads shall be not less than 4 feet in length.

4.6.2.12.2 Conducted. Test Methods CS01, CS02, and CS06, as modified in 3.8.2, Interference Spike Test specified in CS06 shall be modified as specified in 3.8.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2.12.3 Failure criteria. The production model and the initial production AA's and EMA's (when furnished separately) shall be tested to determine conformance to 3.8. The contractor shall furnish the contracting officer a report of tests required by MIL-STD-461. Disapproval of the test report shall constitute failure of this test.

4.7 Inspection comparison. The Government may select AA's and EMA's (when furnished separately), at any time during the contract production period and subject these AA's and EMA's (when furnished separately), to the examination specified in 4.6.1 and the tests specified in 4.6.2 to determine conformance to the requirements of this specification. The inspection will be performed by the Government, at a site selected by the Government, on AA's and EMA's (when furnished separately), selected at random from those which have been accepted by the Government, and will not include the previously inspected preproduction model and initial production AA's and EMA's (when furnished separately). In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison, and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.7.1 Inspection failure. Failure of an inspection comparison AA or EMA (when furnished separately), to meet any requirement specified herein during and as a result of the examination and tests specified in 4.7 shall be cause for rejection of the inspection comparison AA's and EMA's (when furnished separately), and shall be cause for refusal by the Government to continue acceptance of production AA's and EMA's (when furnished separately), until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on AA's and EMA's (when furnished separately), previously accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all AA's and EMA's (when furnished separately), accepted prior to the completion of inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.8 Inspection of packaging.

4.8.1 Quality conformance inspection of pack.

4.8.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.8.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.8.1.3 Examination. Samples selected in accordance with 4.8.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

111.	Materials, methods, and containers not as specified for Level A or Level B. Each incorrect material, method, or container shall be considered one defect.
112.	Keys not placed with the AA as specified for Level A, Level B, or Commercial.
113.	Emergency power supply batteries not preserved and packed separate from the AA for Level A, Level B, or Commercial.
114.	Components furnished separately, not preserved and packed as specified for Level A or Level B.
115.	AA's and battery not cushioned and secured within the individual box as specified for Level A or Level B.
116.	Box for battery not sealed as specified for Level A or Level B.
117.	AA's and batteries not packed in the same quantities for Level A or Level B.
118.	Strapping not as specified for Level A.
119.	Quantities packed together exceed the size or weight limitations of the box for Level A or Level B.
120.	Marking missing, illegible, incorrect, or incomplete for Level A, Level B, or Commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A, Level B, or Commercial as specified (see 6.2).

5.1.1 Level A. The AA, except for the emergency power supply battery and with the enclosure keys contained in a cotton drawstring bag or heat-sealed plastic bag, shall be preserved in accordance with MIL-P-116,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

Method IIc then placed in a close-fitting box conforming to PPP-B-636, W6c. The AA shall be cushioned and secured within the box to prevent free movement or damage.

5.1.1.1 Emergency power supply battery. The emergency power supply battery shall be separately preserved from the AA in a close-fitting box conforming to PPP-B-636, W6c. The battery shall be cushioned and secured to prevent free movement or damage. The box shall be closed and sealed as specified for Method V in the appendix to the box specification. The box shall be marked with the date of the battery charging (see 3.6.4).

5.1.1.2 Components procured separately.

5.1.1.2.1 Electronics assembly, speaker, and transformer. Each electronics assembly, speaker, or transformer, when procured separately, shall be individually preserved in accordance with MIL-P-116, Method IIe, using a close-fitting box conforming to PPP-B-566 or PPP-B-676, Variety 1, style, type, and class optional.

5.1.1.2.2 Power supply batteries. Preservation shall be as specified in 5.1.1.1.

5.1.1.2.3 Consolidation. Components of like description, preserved as specified in 5.1.1.2.1, shall be consolidated together in a close-fitting box conforming to PPP-B-636, W6c or W5c, style optional, in quantities not to exceed the weight limitation of the box.

5.1.2 Level B. Preservation shall be as specified in 5.1.1 for Level A except Method IA-8 shall be used in place of Method IIc and Method IA-15 shall be used in place of Method IIc.

5.1.3 Commercial. The AA, with the enclosure keys, shall be preserved together. The power supply battery and components procured separately shall be individually preserved. Each shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.2.1 Level A. The AA's preserved as specified in 5.1 shall be packed together in a close-fitting box conforming to PPP-B-601, Overseas Type, Grade B, style optional, in quantities not to exceed the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

weight limitation of the box. Closure and strapping shall be in accordance with the appendix to the box specification. Strapping shall conform to QQ-S-781, Class 1, Type I or IV, size as applicable. Unless otherwise specified (see 6.2), strapping shall be Finish B. When specified (see 6.2), strapping shall be Finish A.

5.2.1.1 Power supply batteries. The batteries, preserved as specified in 5.1, shall be packed together as specified in 5.2.1 for the AA's and in the same quantity as the AA's, but shall be shipped separate from, but at the same time as, the AA's.

5.2.1.2 Components procured separately. Components of like description, preserved as specified in 5.1, shall be packed together as specified in 5.2.1.

5.2.2 Level B. The AA's, power supply batteries, and components, preserved as specified in 5.1, shall be packed as specified in 5.2.1, 5.2.1.1, and 5.2.1.2 except boxes shall be Domestic Type. As an alternate, boxes conforming to PPP-B-636, V3c, V11c, V13c, or V15c, may be used when the quantity to be packed does not exceed the gross weight or size limitations of the box specification. Box closure and strapping shall be in accordance with the appendix to the applicable box specification.

5.2.3 Commercial. The AA's, power supply batteries, and components furnished separately, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military. Marking for Level A or Level B shall be in accordance with MIL-STD-129 and the special marking specified in 5.3.3.

5.3.2 Commercial. Marking for commercial packaging shall be in accordance with MIL-STD-1188 and the special marking specified in 5.3.3.

5.3.3 Special marking. Each shipping container shall be marked with code labels in accordance with MIL-STD-129. The labels shall contain the Project Code "JID".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The AA is intended for use as a component of the Joint-Services Interior Intrusion Detection System (J-SIIDS).

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When major components are to be furnished separately and number to be furnished (see 3.1.1).
(c) Time frame required for submission of the preproduction model and number of AA's and EMA's (when furnished separately), required (see 3.2).
(d) When the Government will conduct any or all of the preproduction model examination and tests. When the Government will conduct some but not all of the preproduction examination and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).
(e) When initial production inspection is required and number of AA's and EMA's (when furnished separately), to be furnished (see 3.3).
(f) When cleaning, treating, painting, and the color shall be other than as specified (see 3.10).
(g) When Government-loaned property is not required or is other than that specified (see 3.11).
(h) Degree of preservation and packing required (see 5.1 and 5.2).
(i) When other than Finish B strapping is required (see 5.2.1 and 5.2.1.1).

6.3 Preproduction model. Any changes or deviations of production AA's and EMA's (when furnished separately), from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish AA's conforming to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

6.4 Definitions. The following definitions shall apply throughout this specification.

6.4.1 False alarm. An alarm generated by stimuli other than those for which the AA is designed to alarm.

6.4.2 Damage. Damage is defined as deformation, corrosion, loosening of parts, breakage, or change of fit of any component; physical change which impairs the mechanical integrity of the AA or EMA (when furnished separately); evidence of delamination or water penetration into integrated circuits, printed circuit boards, external components; or physical conditions resulting in noncompliance of the AA or EMA (when furnished separately) with the provisions of this specification.

6.4.3 Supplementary quality assurance provisions (SQAP). A SQAP is a contractual requirement that supplements Section 4 of the specification. SQAP's indicate that the minimum requirements which must be inspected on the product drawings to verify the design objectives of the product and assure interchangeability of the repair parts.

6.5 Supplementary quality assurance provisions (SQAP) records. The contracting officer should require the contractor to maintain records of all SQAP inspections. A suggested paragraph is as follows:

> "The contractor shall maintain complete records of all examinations and tests performed to verify the requirements of classified SQAP characteristics. The records shall include, as a minimum, lot size, sample size, drawing requirements, actual measurements, number and type of deficiencies found, quantity approved, quantity rejected, corrective action taken when applicable."

6.6 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manual to be furnished with each AA.

6.7 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions on shipment of AA's.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

6.8 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.4).

6.9 Government-loaned property. The contracting officer should arrange to loan the property specified in 3.11 when applicable (see 6.2).

Custodians:
Army - ME
Navy - EC
AF - 99

Review activity:
DLA - GS

User activity:
Navy - MC

Preparing activity:
Army - ME

Project 6350-0060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

APPENDIX

TEST METHODS

FOR

AA

10. SCOPE

10.1 Scope. The test methods contained in this appendix are to determine whether AA's procured under this specification conform to the requirements specified. Figures A-1 through A-5 are required to facilitate testing of the AA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TEST METHOD 1

FUNCTIONAL TEST

1. TEST APPARATUS:

   (a) Power supply - Power Design Model 4005 or equivalent.
   (b) Power plug, ac.
   (c) Multimeter (2) - Simpson Model 260 or equivalent.
   (d) Resistor, 3k ohm ±1 percent.
   (e) Metal film resistor - MF5C, 10k ohm ±1 percent, 1/8w/Electra or equivalent.
   (f) Dummy load (see Figure A-1).

2. TEST PREPARATION:

   (a) Connect test equipment as shown in Figure A-1.

   NOTE: Do not turn power on or connect batteries until directed to do so by the procedure.

   (b) Connect the power supply to terminals TB2-1 and TB2-2. Turn the power supply on and adjust it to 5.0 Vdc.
   (c) Depress the EXTERNAL TAMPER (pry-off) and INTERNAL TAMPER (door) switches.
   (d) With the POWER switch in the OFF position, install and connect the battery to the unit.
   (e) Apply 115 Vac by plugging in power plug.

3. TEST PROCEDURE:

   (a) Turn POWER switch to the ON position. There shall be no alarm. Also measure the voltage Tv between pins 2 and 3. It shall be 4.5 to 5.5 Vdc.
   (b) Adjust the Model 4005 power supply voltage to 4.0 ±0.2 Vdc. There shall be no alarm. Voltage Tv shall be 4.5 to 5.5 Vdc.
   (c) Reduce the Model 4005 power supply voltage to 0.9 Vdc. There shall be an alarm. Voltage Tv shall be less than 1 Vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

(d) Adjust the Model 4005 power supply voltage to 4.5 ±0.5 Vdc. There shall be no alarm.
(e) Connect one multimeter to terminals TB2-2 and TB2-3 and measure the voltage. This voltage shall be from 4.5 to 5.5 Vdc.
(f) Connect the negative side of the multimeter to the outer housing and the positive side to the inner housing. This voltage shall be from 3.0 to 5.5 Vdc.
(g) Connect the 10k ohm ±1 percent resistor from the inner housing to the outer housing.
(h) Measure the voltage between terminal TB2-2 and terminal TB2-3. This voltage shall be less than 1.0 Vdc.
(i) Remove the 10k ohm ±1 percent resistor from the inner to outer housings.
(j) Release the EXTERNAL TAMPER switch and maintain the INTERNAL TAMPER switch in the depressed condition. The voltage between terminals TB2-2 and TB2-3 shall be less than 1.0 Vdc.
(k) Depress the EXTERNAL TAMPER switch by pushing the switch button in and holding it. The voltage between terminals TB2-2 and TB2-3 shall be from 4.5 to 5.5 Vdc.
(l) Maintain the EXTERNAL TAMPER switch in the depressed condition and release the INTERNAL TAMPER switch. The voltage between terminals TB2-2 and TB2-3 shall be less than 1.0 Vdc.
(m) Depress the INTERNAL TAMPER switch by pushing the switch button in and holding it. The voltage between terminals TB2-2 and TB2-2 shall be from 4.5 to 5.5 Vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TEST METHOD 2

EMERGENCY POWER TEST

1. TEST APPARATUS:

(a) Power supply - Power Design Model 4005 or equivalent.
(b) Power plug, ac.
(c) Multimeter (2) - Simpson Model 269 or equivalent.
(d) Emergency power/sounding device test setup (see Figure A-2).

2. TEST PREPARATION:

(a) Connect test equipment to the AA as shown in Figure A-2.
(b) Turn on power supply and adjust to 4.5 to 5.5 Vdc.
(c) Turn POWER switch to the ON position.

NOTE: Do not plug in the ac power cord.

3. TEST PROCEDURE:

(a) Turn off the Model 4005 power supply and start the timer. Allow the unit to alarm for 25 minutes.
(b) Plug in the ac power cord and allow the alarm to sound for an additional 5 minutes.
(c) Turn on and adjust the Model 4005 power supply to 4.5 Vdc.
(d) Connect multimeter (set to 0-5A range) in series with the battery. Connect another multimeter (set to read voltage) across the battery terminal block. Start the timer.
(e) After 24 hours, remove the ammeter from the circuit and unplug the ac power cord. Turn off the Model 4005 power supply. Measure the battery voltage. It shall be greater than 22.0 Vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TEST METHOD 3

SOUND DEVICE TEST

1. TEST APPARATUS:

(a) Power supply - Power Design Model 4005 or equivalent.
(b) Sound pressure meter.

(1) Octave band analyzer - General Radio Type 1558 or equivalent.
(2) Pre-amplifier and microphone set - General Radio Model 1560-P40K or equivalent.
(3) Cable assembly (25 feet) - General Radio Model 1560-P72E or equivalent.

(c) Test chamber (see Figure A-4).

2. TEST PREPARATION:

NOTE: The sounding device test shall be performed using a sound chamber described in Figure A-4.

(a) Install the test device inside the test chamber.
(b) Connect the power supply to terminals TB2-1 and TB2-2 and the ac power cord to TB1-1, TB1-2, and TB1-3 (ground).
(c) Turn on and adjust the Model 4005 power supply to 4.5 $\pm$0.5 Vdc. Plug in the ac power cord.
(d) Turn POWER switch to ON position.
(e) Secure the inner housing cover and close and lock the outer housing door.
(f) Set up sound level meter 10 feet in front of unit. Use weighting Scale A on the meter for measurement. Use the slow-response meter setting and read the minimum meter reading. Set the dB dial at the 110 dB(M) position.

3. TEST PROCEDURE:

WARNING: A suitable sound barrier or earplugs must be worn at all times while testing the unit. The sound level this

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

unit is capable of producing can cause permanent hearing damage.

(a) Turn Model 4005 power supply off.
(b) Measure sound pressure level. Sound pressure shall be greater than 110 dB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TEST METHOD 4

TAMPER SWITCH TOLERANCE TEST

1. TEST APPARATUS:

   (a) Power supply - Power Design Model 4005 or equivalent.
   (b) Multimeter - Simpson Model 269 or equivalent.
   (c) Tamper switch tolerance test setup (see Figure A-3).

2. TEST PREPARATION:

   (a) Connect test equipment to AA as shown in Figure A-3.
   (b) Adjust the power supply to 4.0 to 5.0 Vdc.
   (c) Place the POWER switch in the ON position.
   (d) Secure the inner housing cover and close and secure the outer door.

3. TEST PROCEDURE:

   (a) Place the unit on a flat surface in a manner to hold the EXTERNAL TAMPER switch closed. Measure the voltage reading. This voltage shall read from 4.5 to 5.5 Vdc.
   (b) Slide a 0.125 inch thick plate gage between the midpoint of the door hinge edge and the flat surface. Measure the voltage. This voltage shall read from 4.5 to 5.5 Vdc.
   (c) Repeat Step (b) at the same location with a 0.250 inch thick plate gage. Measure the voltage. This voltage shall be less than 1.0 Vdc. Remove the 0.250 inch thick gage.
   (d) Measure the distance "x" from the flat surface to the door flange.
   (e) Increase the distance to "x" +0.125 inch by opening the door this distance. Measure the voltage. It shall be 4.5 to 5.5 Vdc.
   (f) Increase the distance to "x" +0.250 inch by opening the door this distance. Measure the voltage. It shall be less than 1.0 Vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TEST METHOD 5

ELECTRONICS MODULE ASSEMBLY TEST

1. TEST APPARATUS:

   (a) Power supply - Power Design Model 4005 or equivalent.
   (b) Power plug, ac.
   (c) Multimeter (2) - Simpson Model 260 or equivalent.
   (d) Frequency meter - Fairchild 7000 or equivalent.
   (e) Voltmeter, ac (500 to 2000 Hz) - HP403A or equivalent.
   (f) Storage oscilloscope.
   (g) Spectrum analyzer - Federal Scientific UA-12 or equivalent.
   (h) Dummy load - 8 ohm, 25 W.
   (i) Functional test setup (see Figure A-1).

2. TEST PREPARATION:

   (a) Disconnect speaker wires from TB3 terminals 6 and 7 and install dummy load as shown in Figure A-1.
   (b) Turn on and adjust the Model 4005 power supply to 4.5 $\pm$0.5 Vdc.
   (c) Plug in the ac power plug.
   (d) Connect the ac voltmeter and oscilloscope across TB3-6 and TB3-7.

3. TEST PROCEDURE:

   (a) Read voltage across 8 ohm load. This voltage shall be 10.5 $\pm$0.5V.
   (b) Observe periodic frequency sweep across load, TB3-6 and TB3-7. This shall be 1.7 $\pm$0.2 sec.
   (c) Connect spectrum analyzer and storage scope as shown in Figure A-1. Observe pattern on scope. The pattern shall show frequency content over the range 500 Hz to 2000 Hz with amplitude variation over the range not exceeding 3 dB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TEST METHOD 6

BURN-IN TEST

1. TEST APPARATUS:

(a) Power supply - Power Design Model 4005 or equivalent.
(b) Power plug, ac.
(c) Multimeter (2) - Simpson Model 260 or equivalent.
(d) Resistor, 3K ohm ±1 percent.
(e) Metal film resistor - MF5C, 10k ohm ±1 percent, 1/8w/ Electra or equivalent.
(f) Burn-in setup (see Figure A-5).

2. TEST PREPARATION:

NOTE: Disconnect speaker wires from terminals TB3-6 and TB3-7 and install a dummy load as shown in Figure A-5.

(a) Turn on and adjust the Model 4005 power supply to 4.5 ±0.5 Vdc.
(b) Plug in the ac power plug.

3. TEST PROCEDURE:

(a) Place the system in operation by applying power.
(b) Exercise the AA in accordance with Test Method 1 not less than nine times during each 24-hour period.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

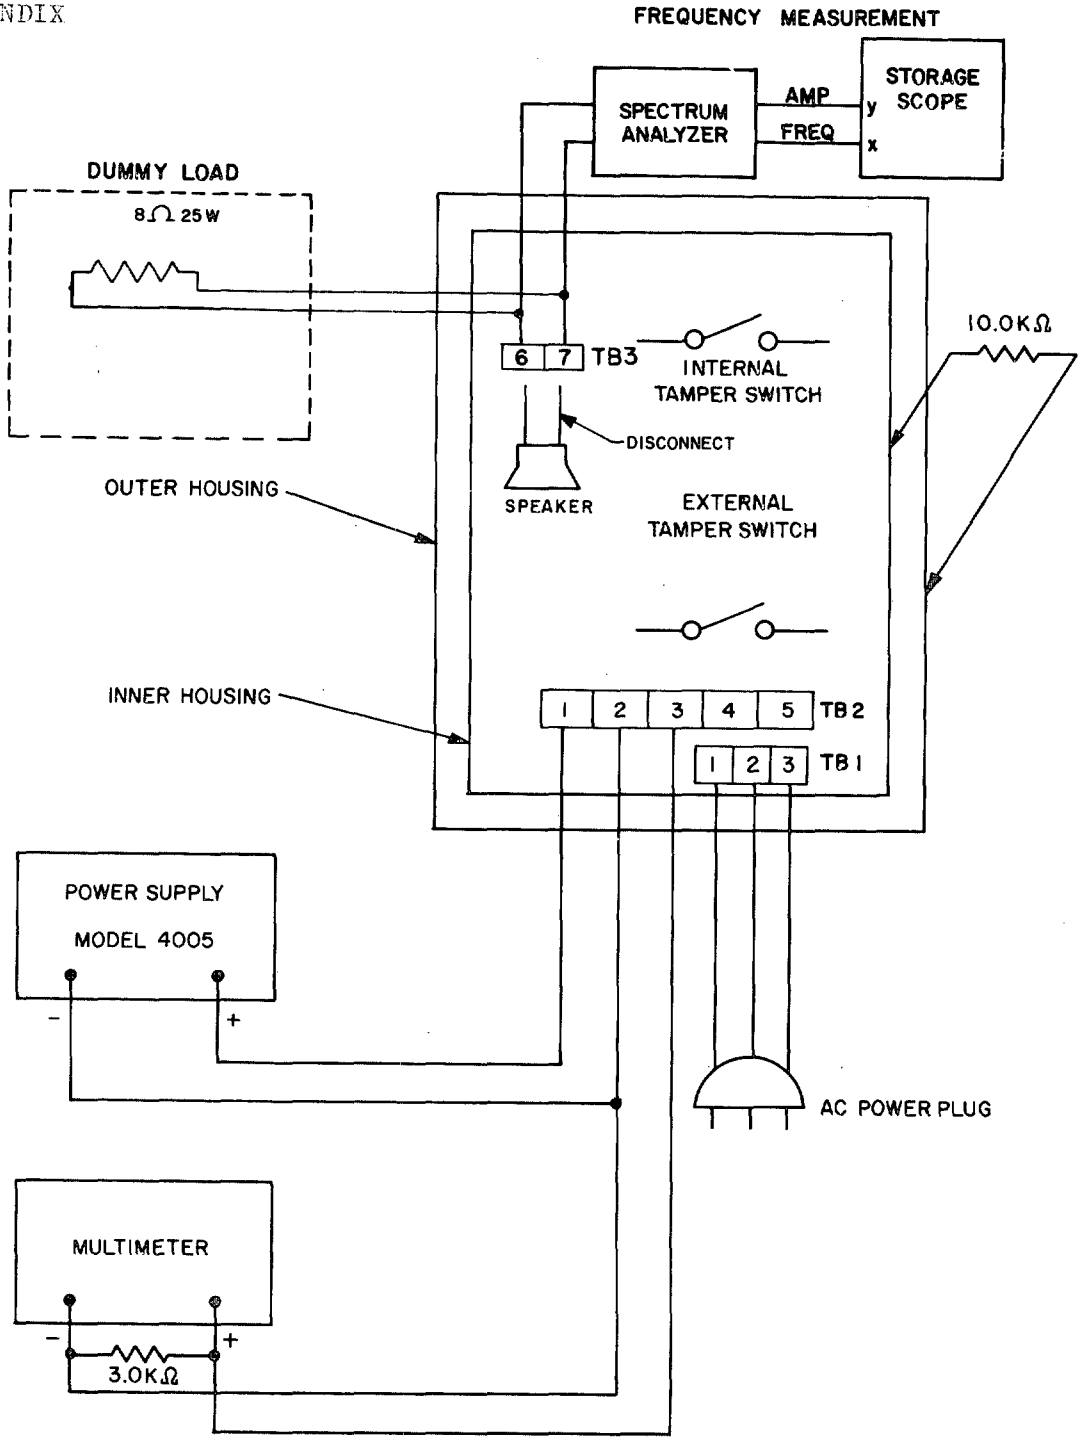


FIGURE A-I. Functional test setup.

X-2996B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

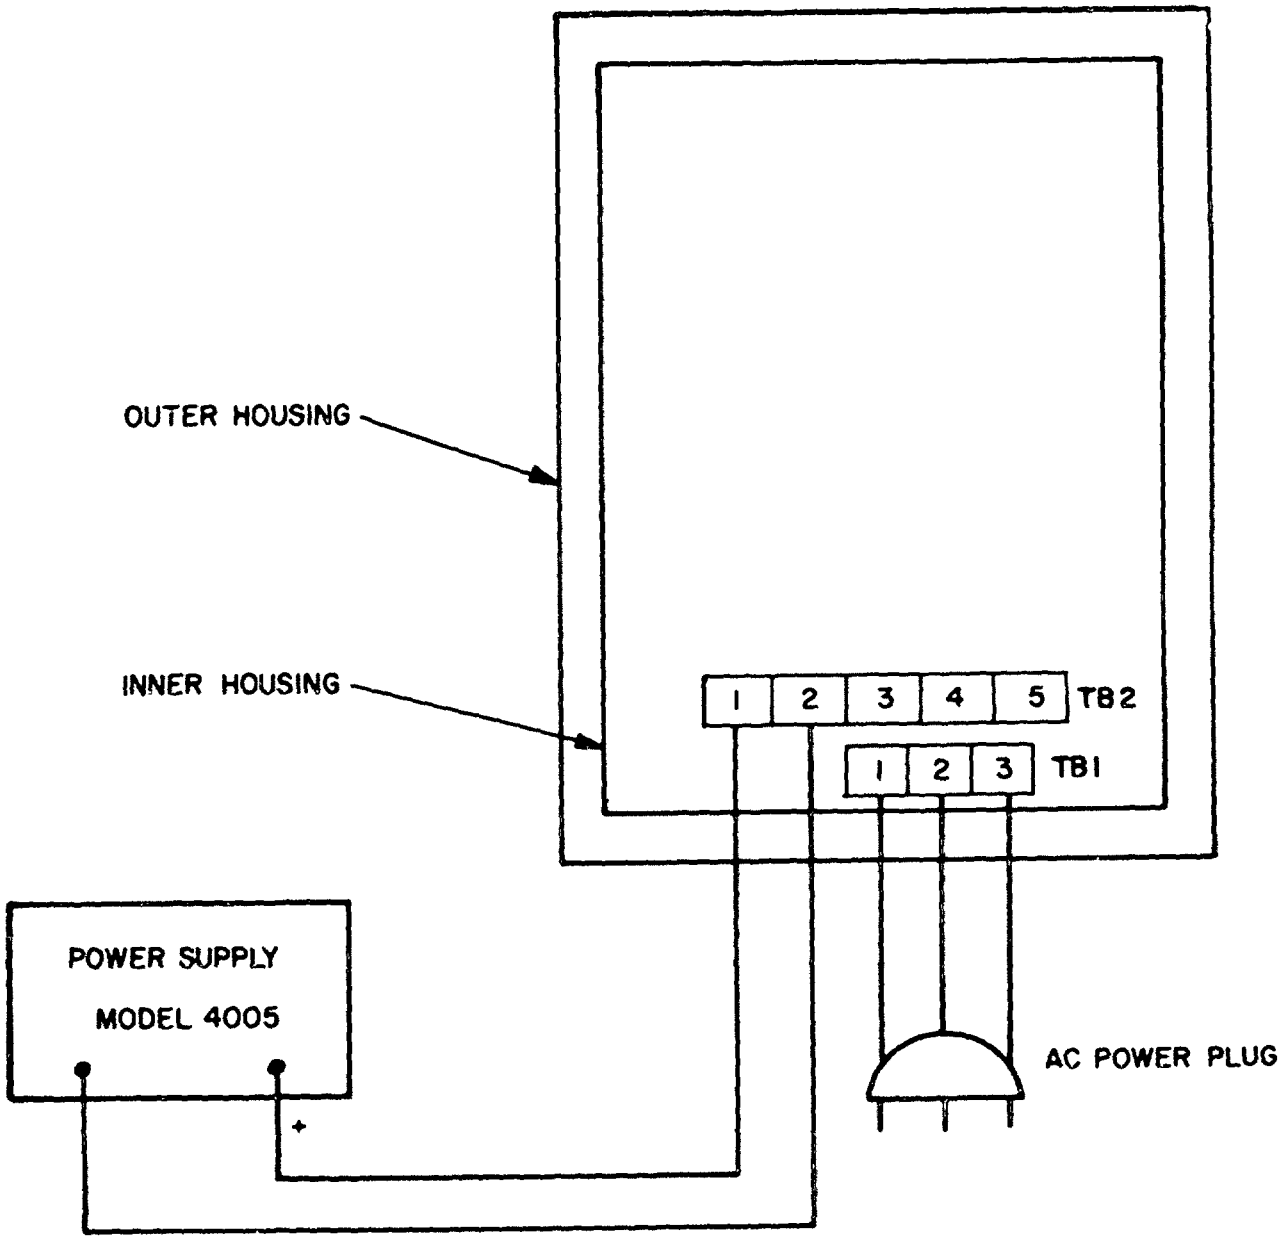


FIGURE A-2. Emergency power/sounding device test setup.

X-2997E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

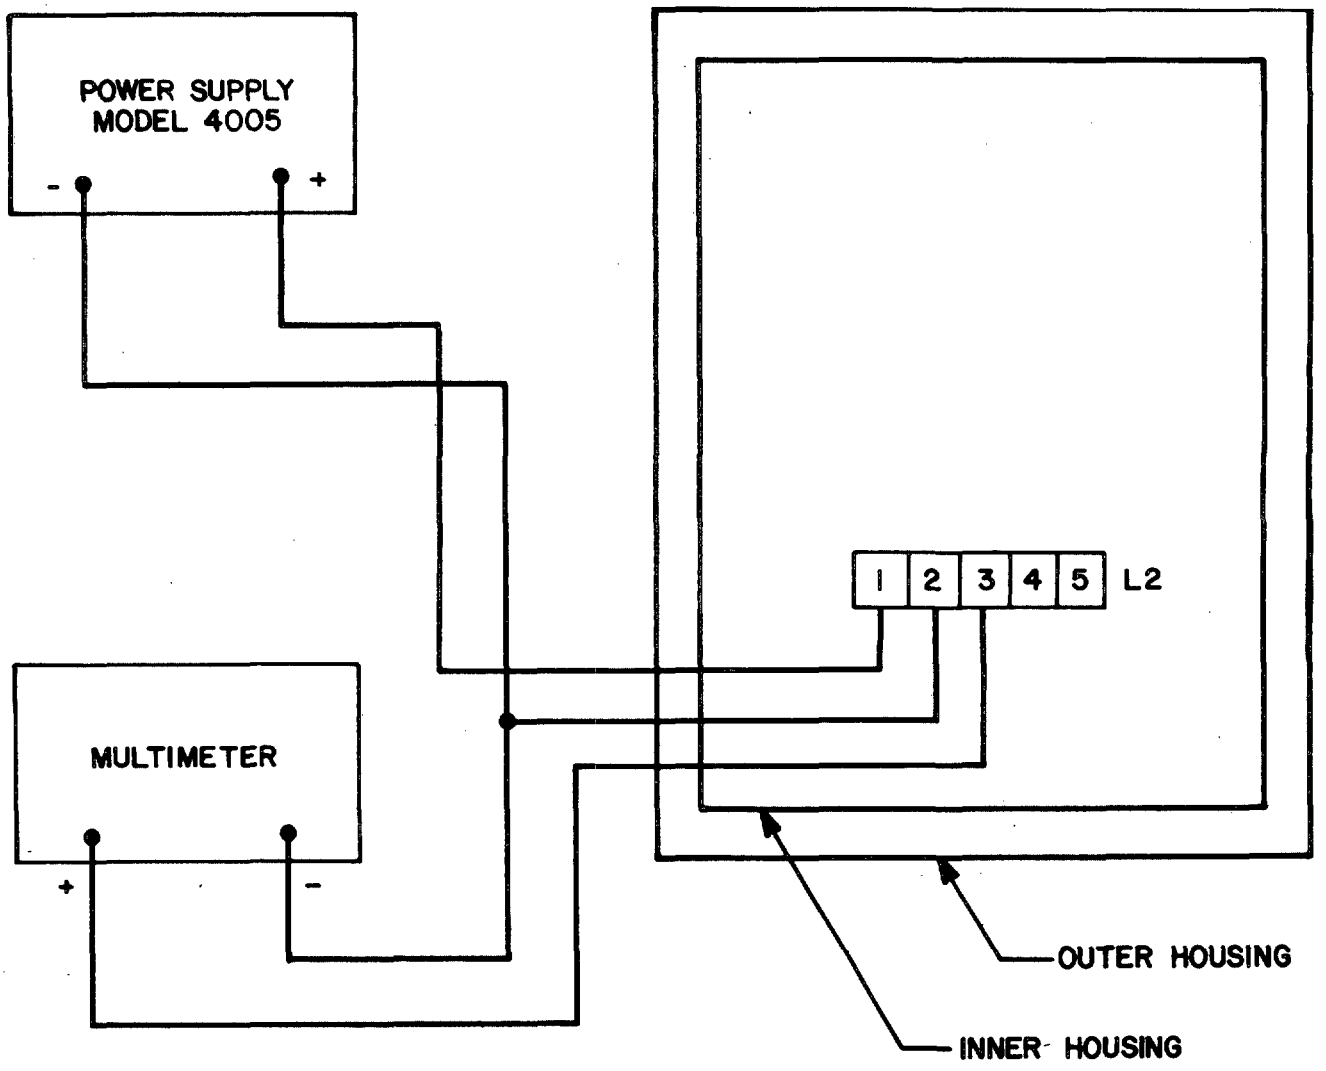


FIGURE A-3. Tamper switch tolerance test setup.

X-2998

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

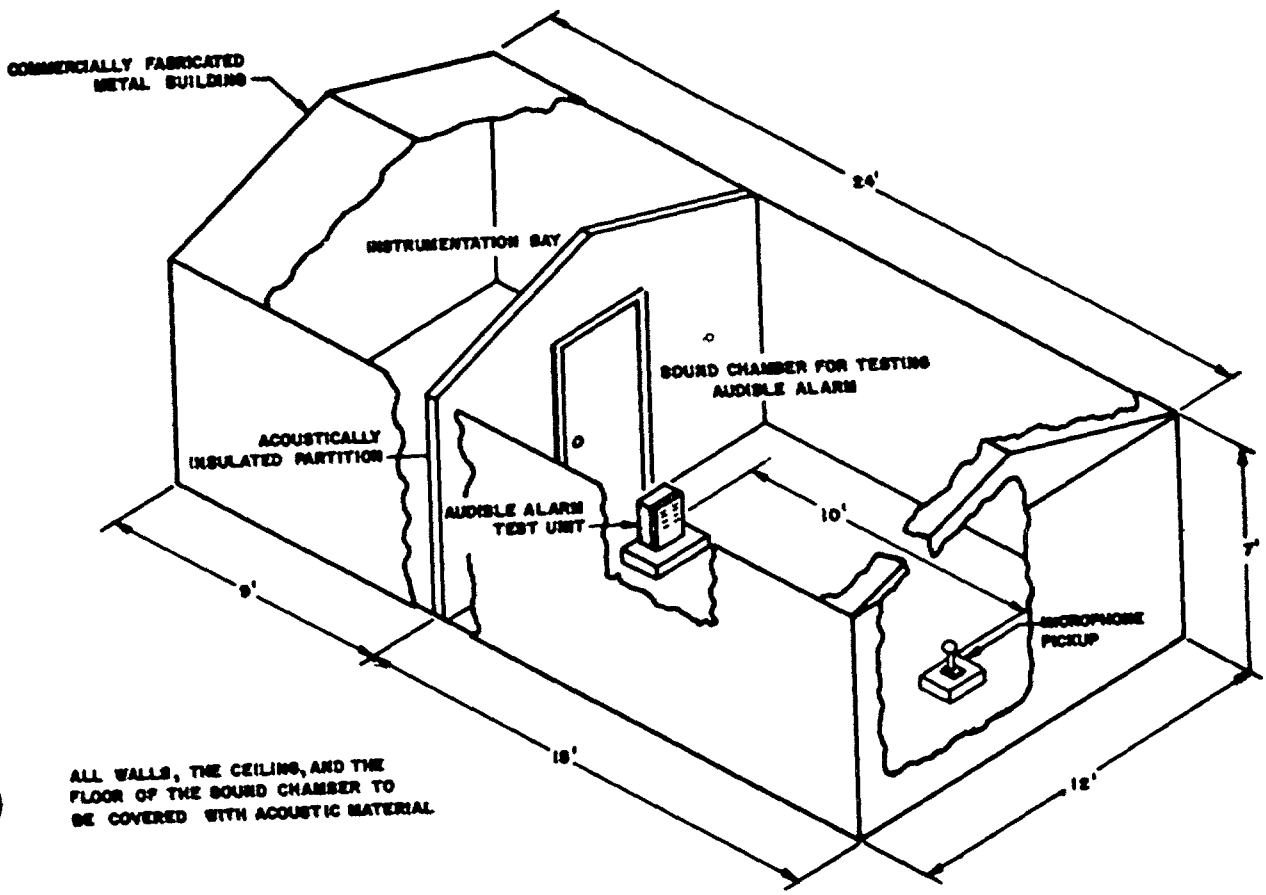


FIGURE A-4. Test chamber.

X-2999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

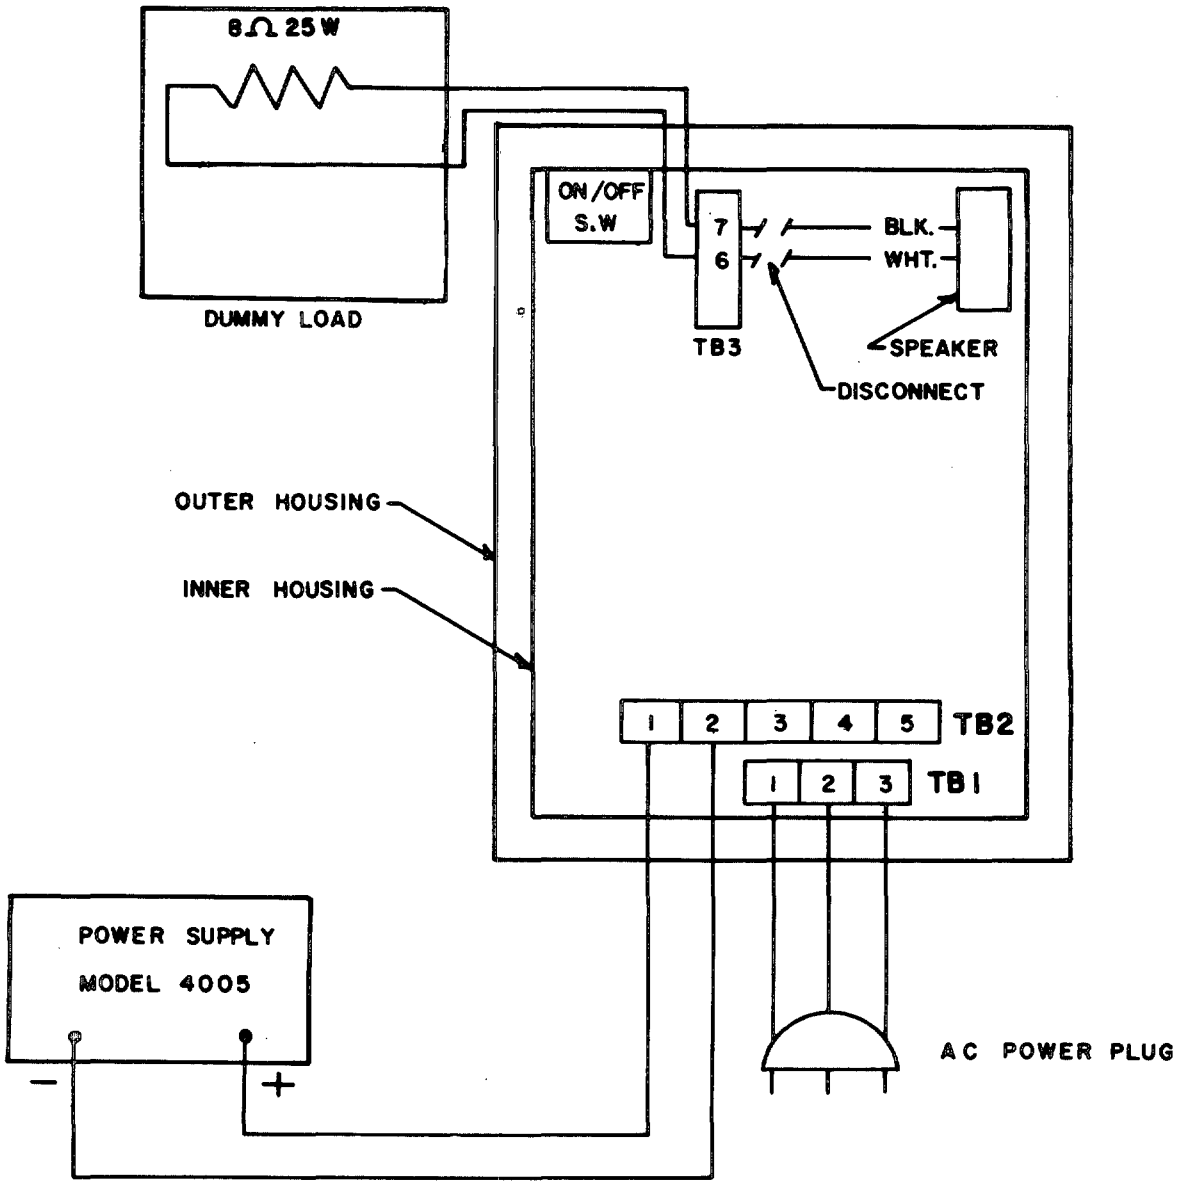


FIGURE A-5. Burn-in setup.

X-3100B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-A-52879B Alarm, Audible BZ-204/FSS-9(V)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.