DATA ITEM DESCRIPTION

Form Approved
OMB No. 0704-0188

1. TITLE	2. IDENTIFICATION NUMBER
Support Equipment Installation Data (SEID)	DI-ILSS-80454

3. DESCRIPTION/PURPOSE

3.1 The SEID provides the Government with information required for the installation of SE in existing or planned shipboard/shore-based facilities.
3.2 It includes services, as well as space, mounting, environmental, special facility, and safety requirements relating to SE installation.

4.APPROVAL DATE	5.OFFICE OF PRIMARY RESPONSIBILITY(OPR)	6a.DTIC APPLICABLE	6b.GIDEP APPLICABLE
871006	AS		

7. APPLICATION/INTERRELATIONSHIP

7.1 This data item describes data required by MIL-STD-2097(AS), paragraph 5.6.2.10.

7.2 This DID shall be applied to SE intended for installation in shipboard and/or shore-based facilities.

7.3 DID DI-ILSS-80118A, LSA-070, SERD is related and companion data.

7.4 This DID supersedes UDI-P-21006D.

8. APPROVAL LIMITATION	9a. APPLICABLE FORMS	9b. AMSC NUMBER
		N4231

10. PREPARATION INSTRUCTIONS

10.1 Reference Documents. The applicable issue of the documents cited herein, including their approval dates and dates of any applicable amendments, notices, and revisions, shall be as specified in the contract.

10.2 Content - SEID shall be furnished as required in MIL-STD-2097(AS), paragraph 5.6.2.10. The SEID required shall be legible and sufficiently detailed to enable site layout, preparation, and complete installation of the equipment by the procuring activity. The data shall include items of information as listed in paragraph 10.3.

10.3 Items of Information - The items of information required shall be prepared under the following headings:

a. Equipment Physical Requirements.
b. Space Requirements.
c. Mounting Requirements.
d. Servicing Requirements.
e. Safety Requirements.
f. Security Requirments.

10.3.1 Equipment Physical Requirements. List as follows:

a. Envelope dimensions - list length, width, and height of equipment, excluding packaging. If equipment folds for storage, list both storage and operating dimensions.

(Continued on page 2)

11. DISTRIBUTION STATEMENT

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

b. Weight - list weight of equipment, excluding packaging.

c. Provide approximate center of gravity.

10.3.2 Space Requirements. List as follows:

a. Operator space - list space required by personnel for operation of the equipment.

b. Drawer removal space - list space required for removal of drawers, opening of doors, or removal of access panels, if applicable.

c. Access space - list access space required at front, rear, above, below, and each side of the equipment.

d. Additional space requirements required for units under test (UUTs) or ancillary test equipment.

(1) Identify UUT mounted test position, e.g., on rack pullout work shelf/adjacent test bench/test roll cart.

(2) Indicate space required to move around the mounted UUT.

e. Recommend position of test station in relation to other stations or associated equipment, as well as maximum and minimum separation permitted between related stations.

f. Storage for ancillary test equipment and publications.

(1) Show test roll cart(s) operating and storage positions with securing features.

(2) Indicate storage requirements for ancillary test equipment and related publications.

10.3.3 Mounting Requirements. List as follows:

a. Mounting:

(1) Rack mounting hole sizes and locating dimensions. (Refer to Figure 2, View 10-A.)

(2) Vibration isolator bottom mounting pad and hole pattern dimensions. (Refer to Figure 2, View 6-D.)

(3) Sequence of installation.

(4) Identify SE and GFAE/WRA (UUT) mounting dimensions or submit drawings. (Refer to Figure 1, Views 6-B, 6-C, 8-C, 9-B, 10-A.)

b. Grounding and connection(s).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

(1) Identify stud size, threads and wire size (AWG). (Refer to Figure 2 Side Elevation View).

c. Special tools for installations.

10.3.4 Servicing Requirements. List as follows:

a. Hydraulic (type of fluid, pressure, flow rate, temperature, and hoses.)

b. Liquid coolant identification.

c. Water (list pressure, flow, volume, temperature, and purity.)

d. Steam (list pressure, flow, volume, temperature, and quality.)

e. Air or vacuum (list pressure, flow, volume, temperature, purity, and vapor limitation.)

f. Gas (list pressure, flow, volume, temperature and type of gas.)

g. Air conditioning (list pressure, flow, volume, temperature, and inlet duct size.)

h. Service System Flow Diagram

(1) Identify hoses/tubing, fittings, valves and sizes.

(2) Identify supply/return fittings and sizes of connections.

i. Electric and Electronic input (Refer to Figure 2, Power Requirements Table I.) For each connection to the power service provided the following:

(1) Alternating Current (Refer to Para 10.4 Definitions)

Nominal Frequency	- Hertz
Frequency Tolerance	- Percent or Hertz
Quantity of Phases	- Number
Type Connection	-Wye or Delta & # of conductors
Nominal Voltage	- Volts (rms)
Voltage Tolerance	- Percentage
Voltage Transient Tolerance	- Percentage
Voltage Transient Recovery Time	- Seconds

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

Total connected Load & Power Factor	- KW or KVA/decimal
Leakage current between any power service connection and chassis or ground connection	- Milliamps

For equipment connections over 3.5 KVA add:

Worst case in-rush current	- Amperes (peak)
Duration of in-rush current	- Milliseconds
Harmonic current spectrum	- % of Fundamental
Largest steady state current change	- Amperes (rms)
Average connected load & power factor	- KW/decimal

(2) Electric and electronic input - Direct Current.

Voltage.

Voltage limits.

Amperage.

Ripple.

Identify positive and negative wiring.

j. Heat dissipation of equipment (Use VA times 3.41 factor for BTU/HR.)

k. Special facility requirements (Example: Ship's Gyro Information if applicable.)

l. Installation Cabling Diagram (Refer to Figure 2, View 9-C or Figure 1, View 10-C.)

(1) Wiring color coding or line identification.

(2) Identify power plugs for compatibility with work bench receptacles.

(3) If required, identify interface device, e.g., transformer with mounting dimensions and connections from ships power and to test equipment. (Refer to Figure 2, View 7-D).

m. Provide interconnecting wiring diagram, for multi-unit/rack

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

systems, e.g., racks that are shipped separately. (Refer to Figure 2, View 10-B.)

(1) Identify cable (W1) and plugs (P1) connected to Jack (J1), etc.

10.3.5 Safety Requirements. The provisions and equipment necessary to protect personnel and equipment including sound attenuation and lase requirements shall be stated.

10.3.6 Security Requirements. State the security classification of the equipment being installed or the classification of any equipment used with the installed equipment.

10.4 Definitions

a. Voltage

(1) User Voltage. The nominal user input voltage (AC) is defined as the root-mean-square (rms) voltage applied. The nominal user input voltage (DC) is defined as the actual positive or negative voltage applied.

(2) User Voltage Tolerance is the maximum permitted departure from nominal user voltage during normal operations, excluding transient and cyclic voltage variations.

(3) Transient Voltage Tolerance. A voltage transient (excluding spikes) is a sudden change in voltage which goes outside the user voltage tolerance limits and returns to and remains within these limits within a specified recovery time after the initiation of the disturbance. The transient voltage tolerance is in addition to the user voltage tolerance limits.

(4) Transient Voltage Recovery Time is the time elapsed from initiation of the disturbance until the voltage recovers and remains within the user voltage tolerance limits.

(5) Phases. Shipboard generators generally have their alternating-current circuits arranged to produce three-phase a.c. power with an angular relationship of 120 degrees. Single-phase a.c. power is also available aboard ship.

b. Frequency

(1) Nominal Frequency is the steady state, nominal user input frequency in Hertz (Hz).

(2) Frequency Tolerance is the maximum permitted departure from nominal frequency during normal operation, excluding transient and cyclic frequency variations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

c. Current

(1) Steady State Current is full load current in rms amps drawn by the user equipment.

(2) Start-Up or In-Rush Current is the turn on, pack current drawn by the user equipment.

(3) Duration of In-Rush Current is the time (in milliseconds) from sudden change in current (turn on) until the current recovers to steady state value.

(4) Harmonic Current Spectrum is the user equipment line currents from the 2nd up to 32nd harmonic (expressed in percent of the fundamental current). A harmonic frequency is a multiple of the fundamental frequency.

d. Power

(1) Connected Load is the nameplate rating of all equipment in the systems.

(2) Steady State Operating Load is the continuous steady-state power in kW and kVA consumed by the user equipment.

(3) Transient Operating Load is the sudden change in power (kW and kVA) consumed by the user equipment.

(4) Power Factor is the ratio of total watts per phase to the total rms volt-amperes per phase.

e. Leakage Current is the total rms current that passes from phase to ground with nominal voltage impressed at the nominal frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

ATERIAL THE LETTERS "W," "H" AND "D" IN ENVELOPE COLUMN REPRESENT DIMENSIONS VIEWED IN THE TION. "W" IS FROM RIGHT TO LEFT. "H" IS FROM TOP TO "D" IS FROM FRONT TO REAR.
3 IS FOR INSTALLATION PURPOSES ONLY, AND NOT FOR T PURPOSES, UNLESS OTHERWISE SPECIFIED.
DISTRIBUTION BOX MAY BE LOCATED AT LEFT OR ENCH, UNLESS OTHERWISE SPECIFIED. SEE E.
SUPPLIED AS GFAE, BUT IS REQUIRED FOR BENCH TEST REMOVED FROM AIRCRAFT.
ER PORTION OF TEST SET, ITEM 1, BY REMOVING TWO AND STOW UNDER WORKBENCH.
CTURE, ITEM 6, CABLES W1 AND W2 REQUIRE .875 NDING RADIUS.
ASSEMBLY PLUG CONNECTORS ARE COMPATIBLE WITH RECEPTACLE CONNECTORS.

REVISIONS			
C	CL "A" REV. NR. REPLACES REV B WITH CHANGE. REVISED L/M. NOTES & REFERENCES. PULCHER		

* REFERENCE DATA NOTES

A. UTILIZE EXISTING HOLES IN REFERENCE 1 WORK SURFACE, WHEN POSSIBLE, TO FACILITATE INSTALLING SUPPORT EQUIPMENT. REFER TO VIEW 6-A FOR HOLE PATTERN.
B. REFERENCE 1 TOP SHELF CAN BE REMOVED IF EQUIPMENT HEIGHT EXCEEDS 23 1/2 INCHES.
C. ABBREVIATIONS SHALL BE IN ACCORDANCE WITH MIL-STD-12.
D. THIS DRAWING WAS DEVELOPED TO STANDARDIZE AND ILLUSTRATE TYPICALLY, THE TYPE OF DATA REQUIRED FOR EQUIPMENT INSTALLATION AS SUBMITTED BY CONTRACTORS.

ORK BENCH ASSEMBLY_____BUWEPS DWG 63A114J
ISTRIBUTION BOX AND
ARD ASSY_____BUWEPS DWG 63A114F12
SVCE INSTR FOR NAV
T, AN/AYK-2_____NAVAIR 16-30AYK2-1
SVCE INSTR WITH IPB
PUTER TEST SET
_____NAVAIR 16-30ASM123-1
ISTR DOCUMENT FOR AN/AYK-2____NO.12345678

PRELIMINARY


* TITLE BLOCK SHALL BE IN ACCORDANCE WITH CONTRACTORS FORMAT

PULCHER	TEST BENCH HARNESS SAMPLE DATA DRAWING	
	SUPPORT EQUIPMENT INSTALLATION	
	H 28038	6SE00053 C
	US CLASSIFIED	1 OF 1

FIGURE 1. Test bench harness sample data drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

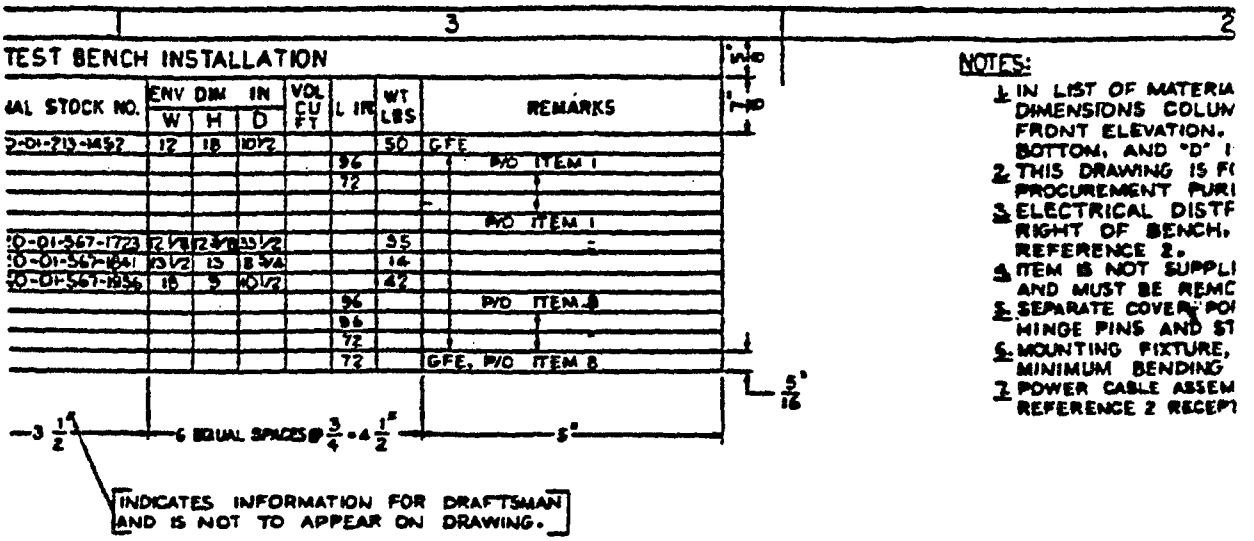

TEST BENCH INSTALLATION

AL STOCK NO.	ENV DIM IN W	H	D	VOL CU FT	L	IR	WT LBS	REMARKS
2-01-213-4592	12	18	10 1/2				50	GFE
					96			P/O ITEM 1
					72			
								P/O ITEM 1
70-01-367-1723	12 1/8	12 3/8	8 5/8	1/2			35	
70-01-367-1841	13 1/2	15	8 3/4				14	
70-01-367-1836	18	5	10 1/2				42	
					96			P/O ITEM 8
					96			
					72			
					72			GFE, P/O ITEM 8

3 1/2" — 6 EQUAL SPACES @ 3/4 = 4 1/2" — 5"

5/16"

INDICATES INFORMATION FOR DRAFTSMAN AND IS NOT TO APPEAR ON DRAWING.

NOTES:

1. IN LIST OF MATERIA DIMENSIONS COLUM FRONT ELEVATION. BOTTOM, AND "D" I
2. THIS DRAWING IS F PROCUREMENT PURI
3. ELECTRICAL DISTF RIGHT OF BENCH. REFERENCE 2.
4. ITEM IS NOT SUPPLI AND MUST BE REMC
5. SEPARATE COVER, PO HINGE PINS AND ST
6. MOUNTING FIXTURE, MINIMUM BENDING
7. POWER CABLE ASSEM REFERENCE 2 RECEPT

REFERENCES:

1. ELECTRONIC WORK BE
2. ELECTRICAL DISTRIBU TERMINAL BOARD ABE
3. HDBK, OPN & SVCE IN COMPUTER SET, AN/A
4. HDBK, OPN & SVCE IN FOR NAV COMPUTER AN/ASM-123(V) _____
5. EOPT INSTL INSTR BO

QUIREMENTS

OLT MP	DC VOLTS	DC AMPS	DC WATTS	HEAT DISSIPATION BTU/HR
545	NA	NA	NA	1176
725	NA	NA	NA	5882
115	28	5	140	869

1" — 1 1/8" — 2" — 1 1/4" — 2 1/4"

6SE00053 C 1

3 2

FIGURE 1. Test bench harness sample data drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

LIST OF MATERIAL AND COMPONENTS FOR TEST BE

ITEM NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	NATIONAL STOCK
1	COMPUTER TEST SET (AN/ASM-123(V)1)	1		1126500	6RX4920-01-219-4
2	CABLE ASSY, POWER, W1 (60 Hz)	1	(P/N MS2548-2)	1126510	
3	CABLE ASSY, COMPUTER, W2	1		1126511	
4	DUMMY CONNECTOR PLUG, D1	1		1126200-01	-
5	DUMMY CONNECTOR PLUG, D2	1		1126201-01	
6	MOUNTING FIXTURE, COMPUTER	1		1367400	6RX4920-01-367-
7	COOLING FAN, AUXILIARY	1		1367500	6RX4920-01-367-
8	CONTROL-INDICATOR SIGNAL TESTER	1		1367600	6RX4920-01-367
9	CABLE ASSY, POWER, W1 (28 VDC)	1	(P/N MS2548-3)	1982562 -	
10	CABLE ASSY, POWER, W2 (400 Hz)	1	(P/N MS2548-4)	1982455 R	
11	CABLE ASSY, W3	1			
12	CABLE ASSY, W4	1			

TABLE I TEST BENCH HARNESS POWER REQUIREMI

EQUIPMENT	AC VOLTAGE	AC FREQUENCY Hz	AC PHASE	AC NO. OF WIRES	AC AMPS	AC POWER FACTOR	AC VOLT AMP	VO
AN/ASM-123(V)1	115	60	1	3	3	UNK	345	N
1367400	115/200	400	3Y	5	5	UNK	1725	N
1367600	115	400	1	3	1	UNK	115	2

FIGURE 1. Test bench harness sample data drawing - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)


7	6

EEL ANGLE
X1½X⅛X9½
TH SIDES


IIA
CES
DATA NOTE A




VIEW 6-C
ITEM 1 COMPUTER TEST SET
SEE NOTE 5

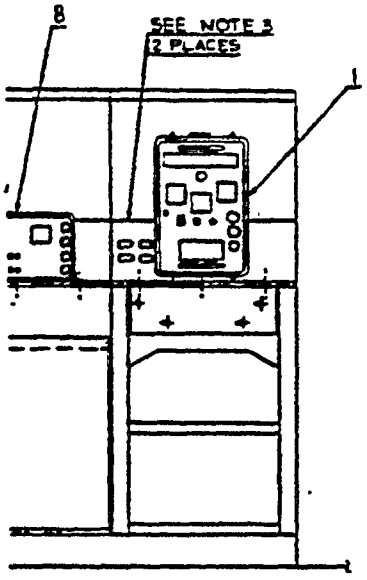

ELEVATION

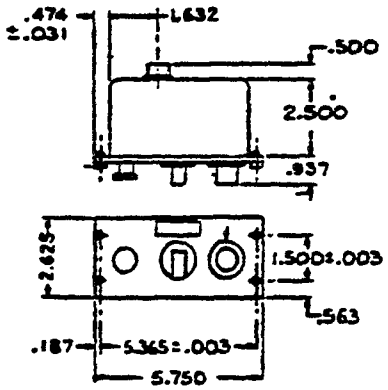

VIEW 6-B
SCALE: 1/2
SAMPLE UUT DATA

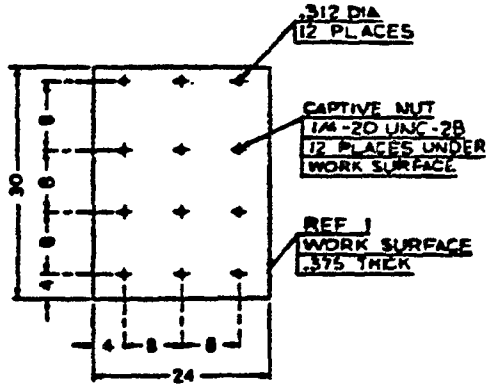

VIEW 6-A
SHOWING BOLT HOLE PATTERN
(SEE DATA NOTE A)


6SE00053	C	1

7	6


FIGURE 1. Test bench harness sample data drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

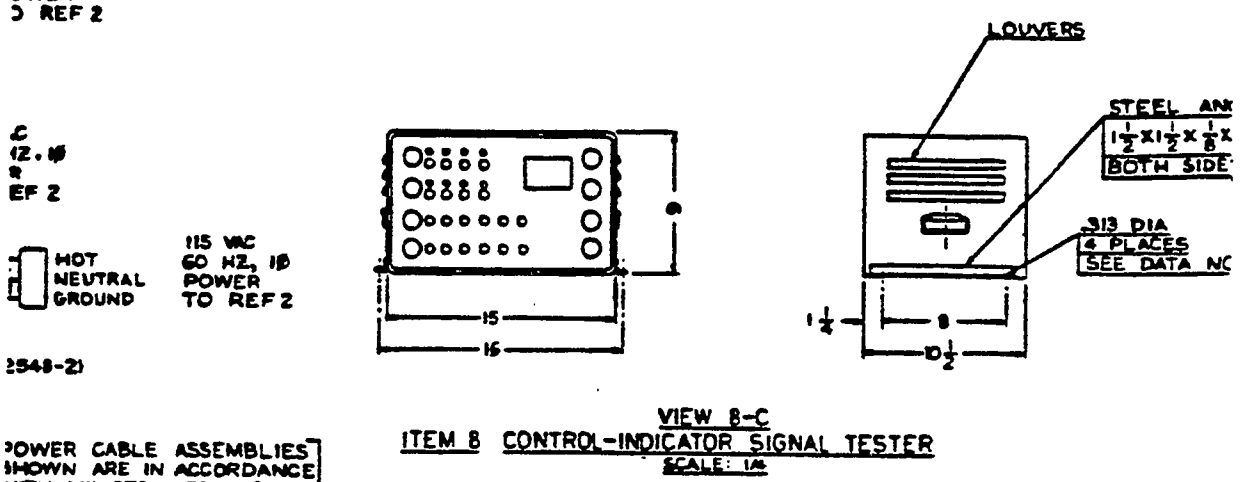

ITEM 8 CONTROL-INDICATOR SIGNAL TESTER
SCALE: 1/4

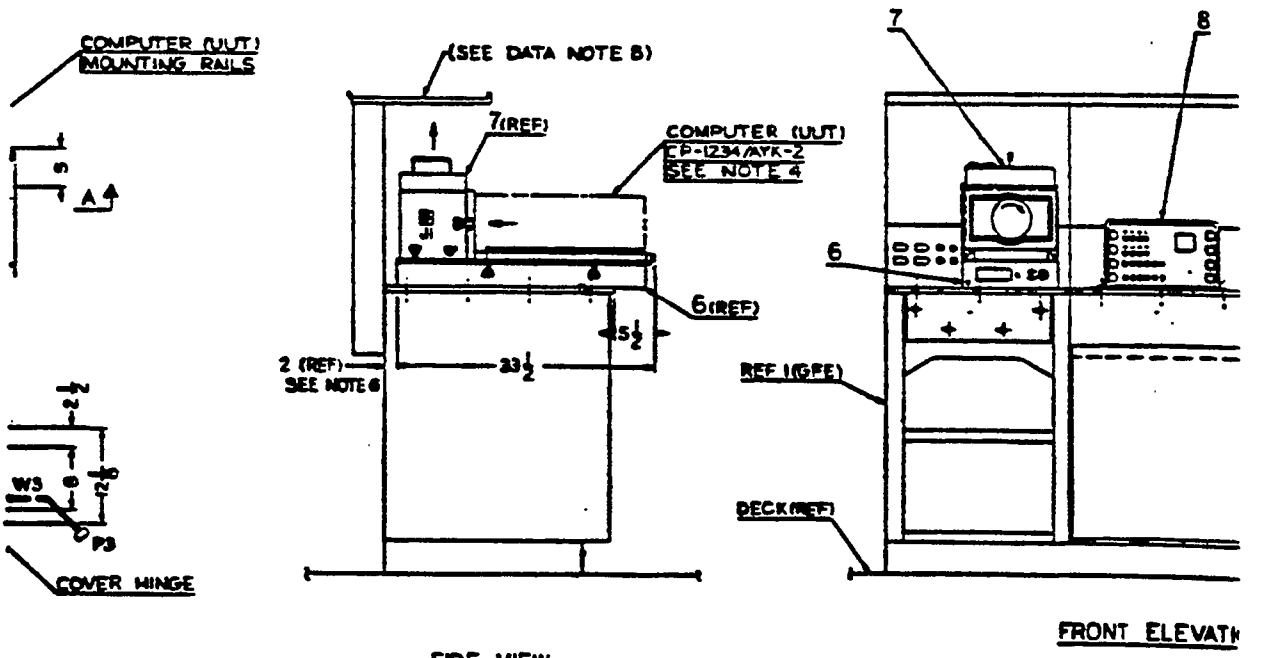

SIDE VIEW

FRONT ELEVATI

FIGURE 1. Test bench harness sample data drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

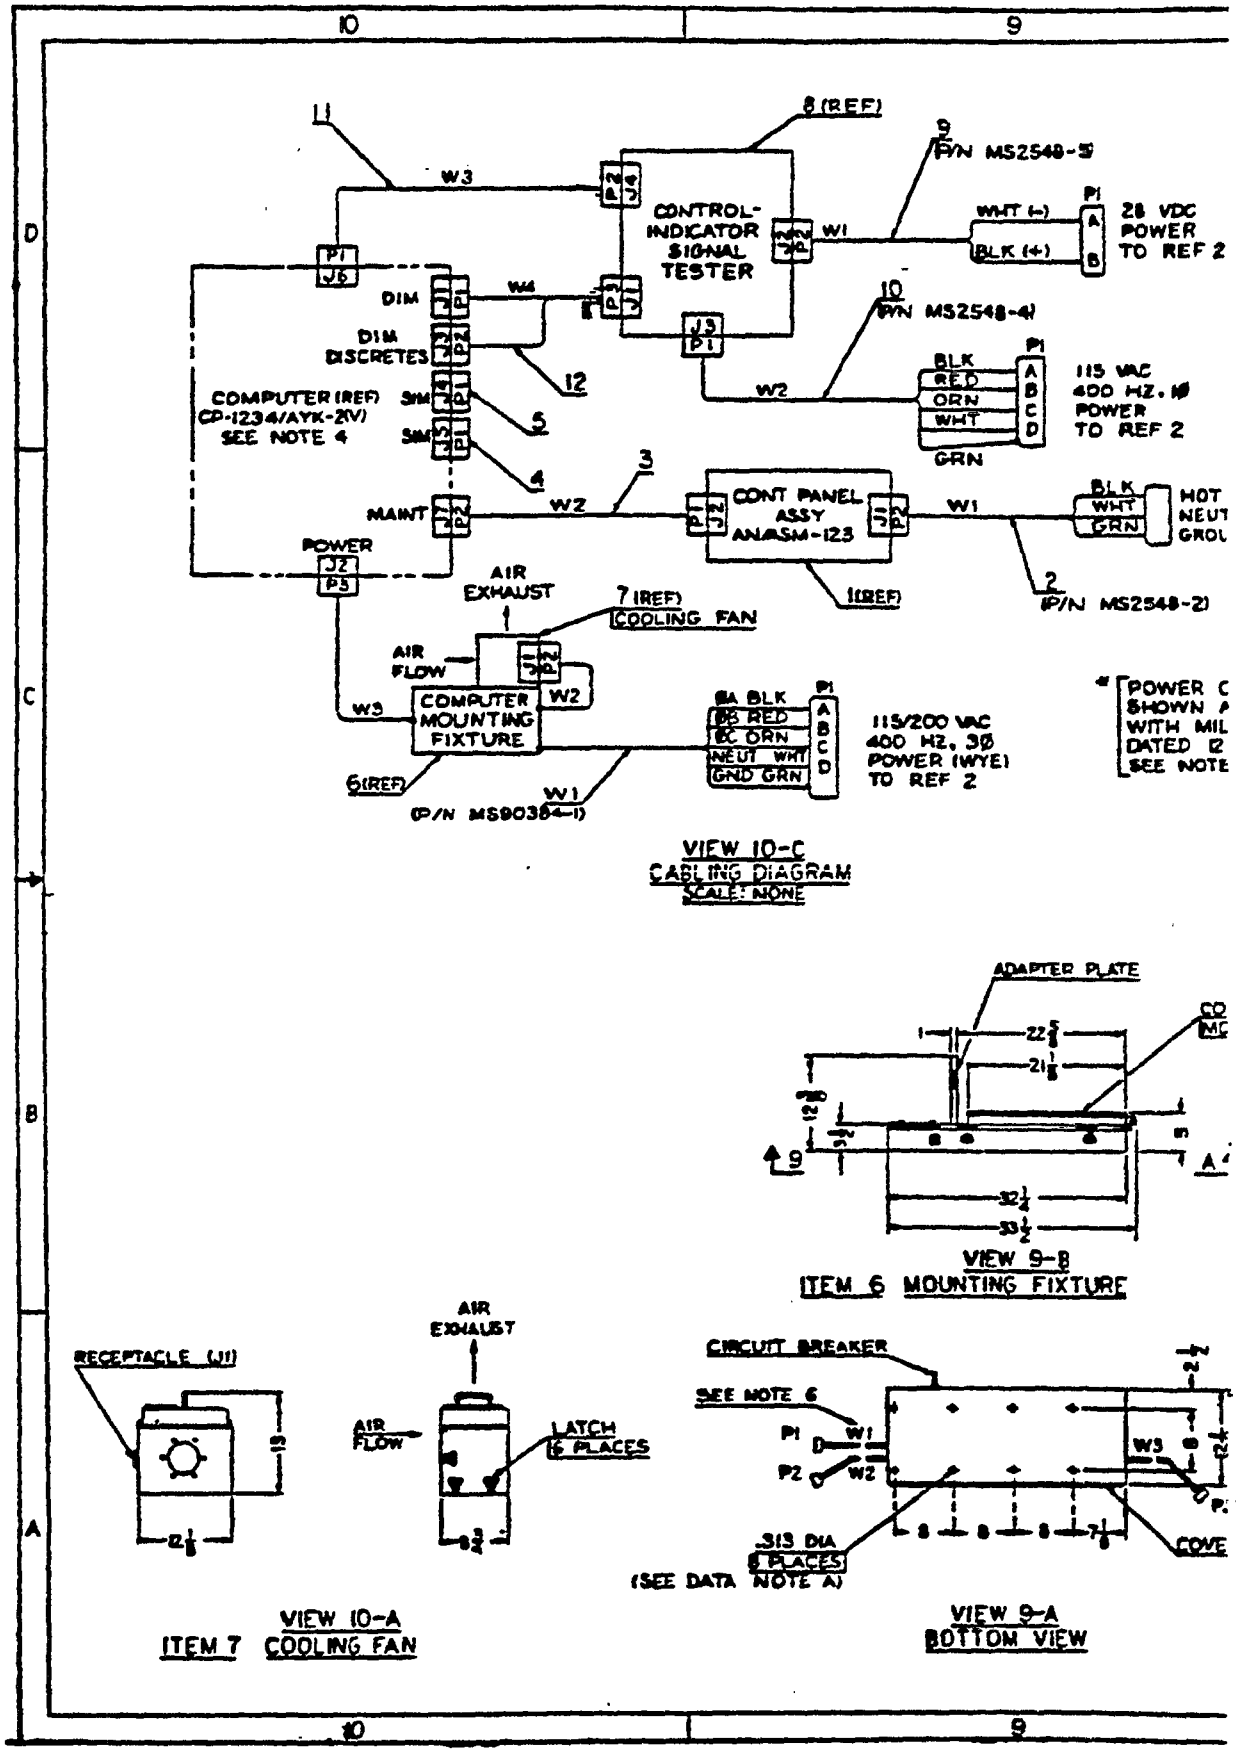


FIGURE 1. Test bench harness sample data drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)


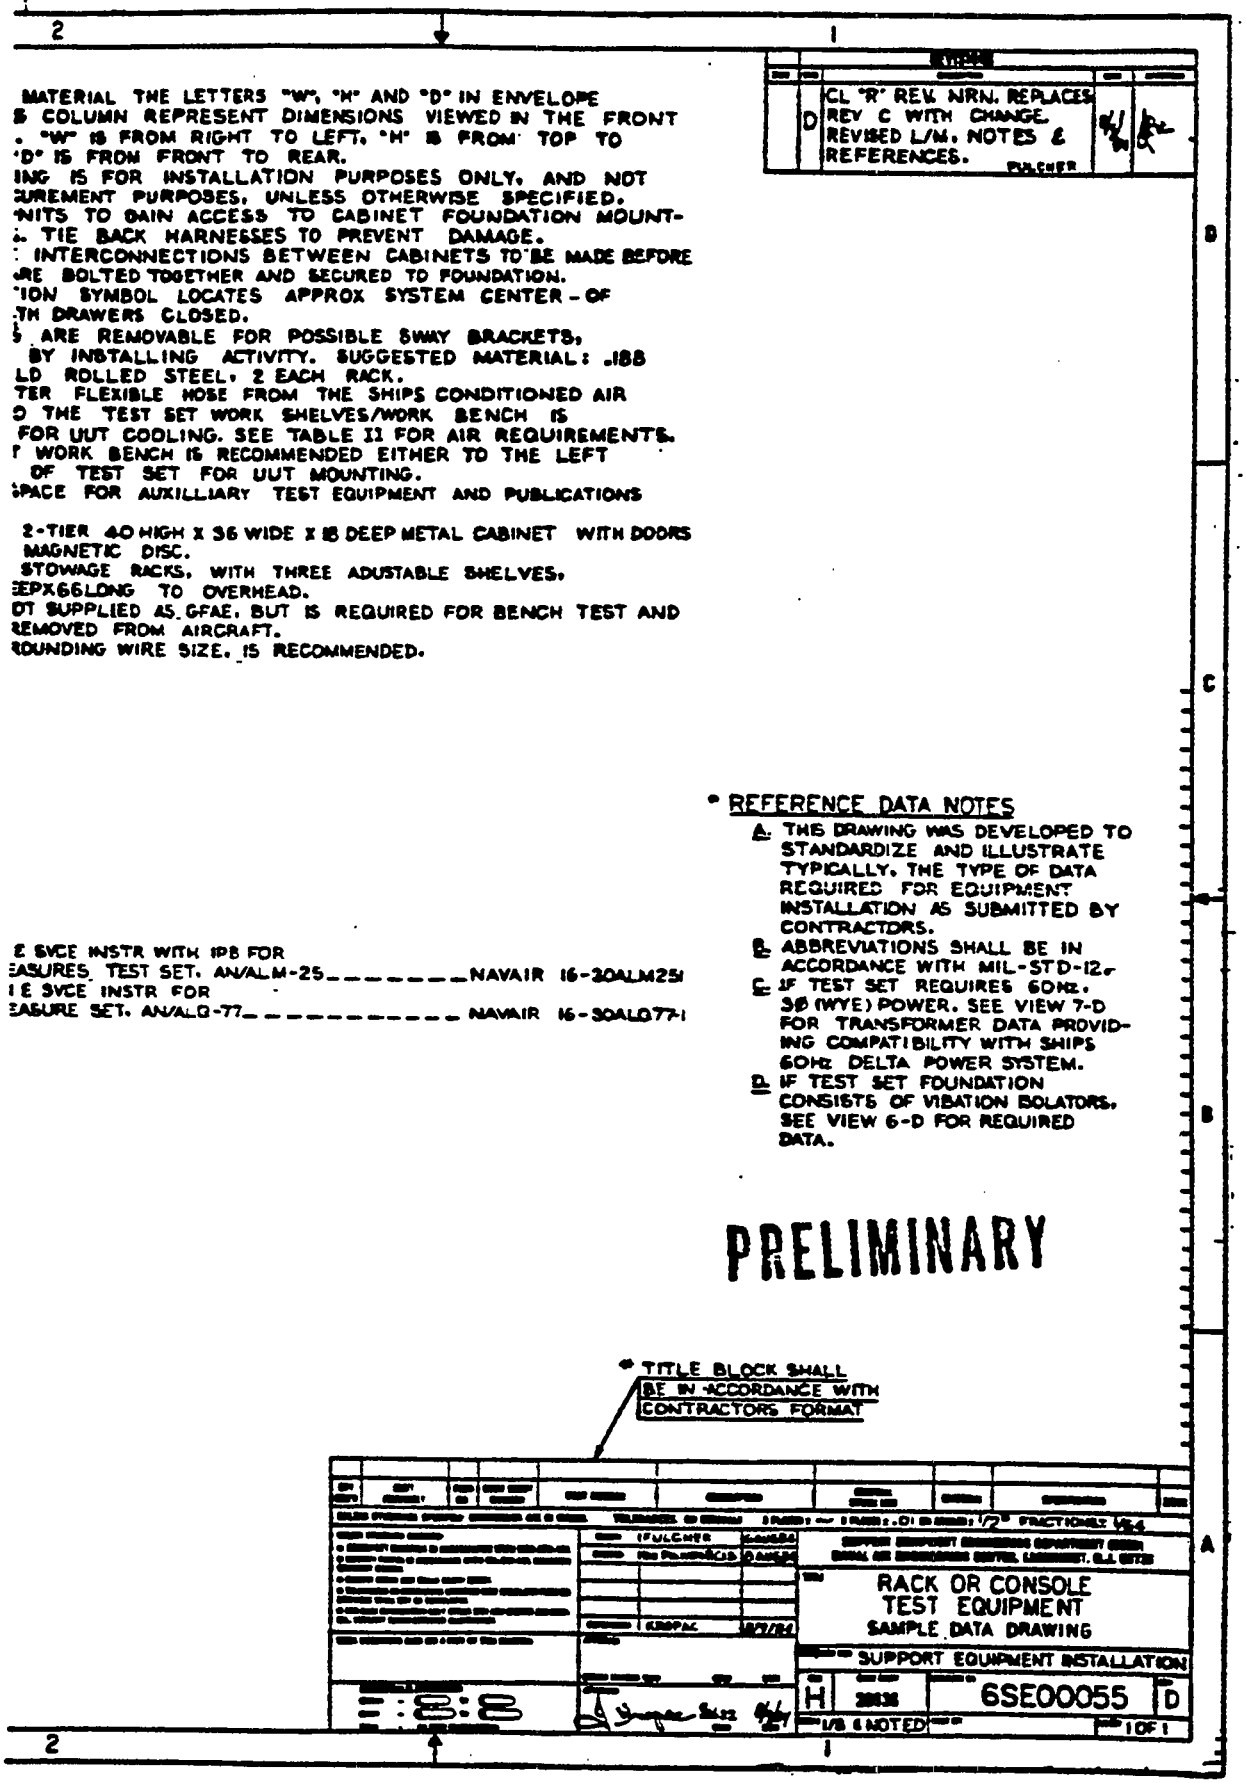


FIGURE 2. Rack or console test equipment sample data drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

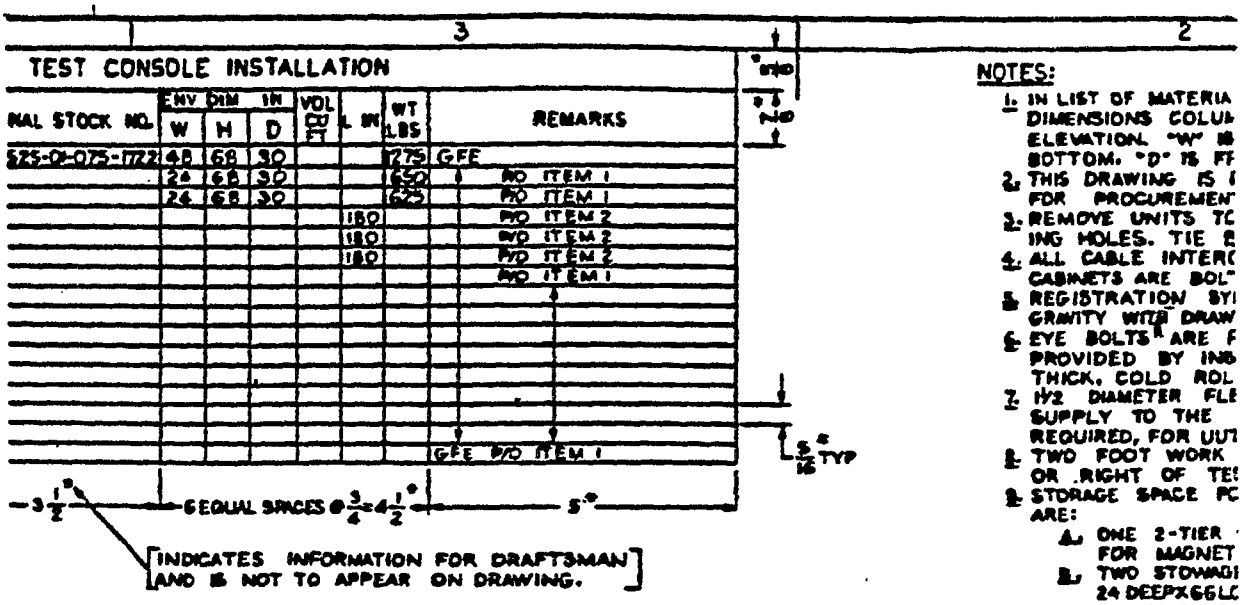

NOTES:

1. IN LIST OF MATERIA DIMENSIONS COLUI ELEVATION. "W" IS BOTTOM. "D" IS FF
2. THIS DRAWING IS I FOR PROCUREMEN
3. REMOVE UNITS TC ING HOLES. TIE R
4. ALL CABLE INTERC CABINETS ARE BOL
5. REGISTRATION BY GRAVITY WITH DRAW
6. EYE BOLTS ARE F PROVIDED BY ING THICK, COLD ROL
7. 1½2 DIAMETER FLE SUPPLY TO THE REQUIRED, FOR UUT
8. TWO FOOT WORK OR RIGHT OF TE
9. STORAGE SPACE PC ARE:
   A. ONE 2-TIER FOR MAGNET
   B. TWO STOWAGI 24 DEEPX66LC
10. ITEM IS NOT SUPPL MUST BE REMOVED
11. #8 AWG GROUNDING

REFERENCES:

1. HDBK. OPN E SVCE M COUNTERMEASURES
2. HDBK. OPN E SVCE COUNTERMEASURE S

EMENTS

WER TOR	VOLT AMP	DC VOLTS	DC AMPS	DC WATTS	HEAT DISSIPATION BTU/HR
10	1380				
60	520	28	7	196	8500

3/8 — 1 — 1 1/8 — 1 1/8 — 1 1/4 — 2 1/4

G REQT

W /MIN	TEMPERATURE DEGREES F
MIN	70° MAX

6SE00055 D 1

3 2

FIGURE 2. Rack or console test equipment sample data drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

LIST OF MATERIAL AND COMPONENTS FOR RACK OR TEST

ITEM NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	NATIONAL STOC
1	TEST SET, COUNTERMEASURES	1	(AN/ALM-25)	3056640G1	6RX6625-01-07
2	RACK ASSY NO. 1	1	(100-123/ALM-25)	3056641G1	
3	RACK ASSY NO. 2	1	(100-124/ALM-25)	3056642G1	
4	CABLE ASSY, POWER, W1 (400 Hz)	1		3021215G1	
5	CABLE ASSY, POWER, W2 (60 Hz)	1		3021216G1	
6	CABLE ASSY, POWER, W3 (28 VDC)	1		3021213G1	
7	CABLE ASSY, W4 (RECEIVER)	1		3021212G1	
8	CABLE ASSY, W5 (COMPUTER)	1		3021211G1	
9	WASHER, FLAT 3/8 DIA	2		MS15795-14	
10	WASHER, LOCK 3/8 DIA	2		MS35338-46	
11	NUT, PLAIN, HEX 3/8-16UNC-2B	2		MS35649-2382	
12	STRAP, GROUNDING 12 LGTH	1		3021105G1	
13	WASHER, FLAT #10 DIA	16		MS15795-42	
14	WASHER, LOCK #10 DIA	16		MS35338-43	
15	NUT, PLAIN, HEX #10-32UNF-2B	16		MS35650-302	
16	BOLT, MACH #10-32UNF-2A X 25/32	16		AN3-6A	

TABLE I TEST RACK POWER REQUIREMENTS

ITEM NO.	EQUIPMENT	AC VOLTAGE	AC FREQUENCY Hz	AC PHASE	AC NO. OF WIRES	AC AMPS	AC POWER FACTOR	VOL AMP
1	AN/ALM-25	115/200	400	3 Y	5	5/8	.80	1580
		115	60	1	3	10	.60	820

SEE NOTE 10

TABLE II UUT AIR CONDITIONING REQT

PRESSURE INCHES OF H_2O	VOLUME CUBIC FEET/MIN	FLOW POUNDS/MIN	ITEM DE
1.5 MIN	21.0 MIN	1.64 MIN	7(

FIGURE 2. Rack or console test equipment sample data drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

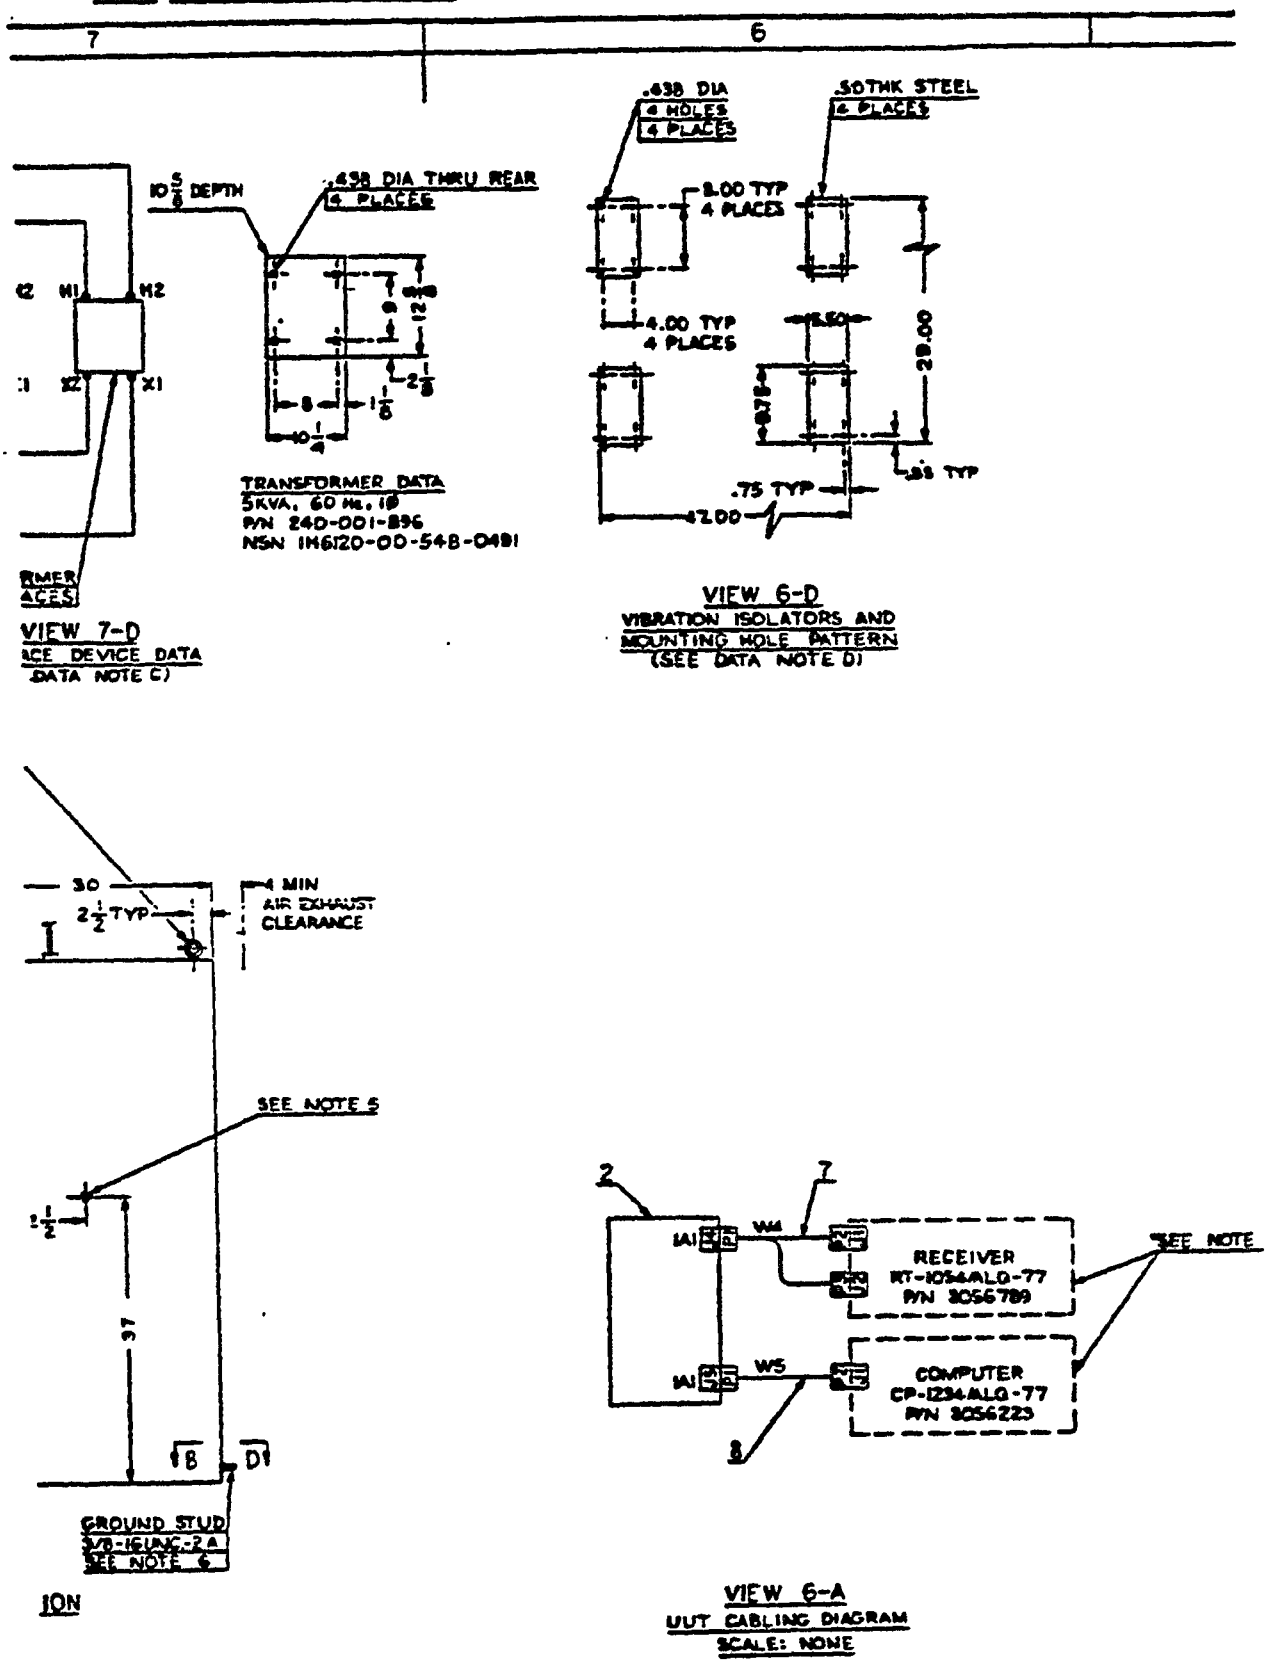


FIGURE 2. Rack or console test equipment sample data drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

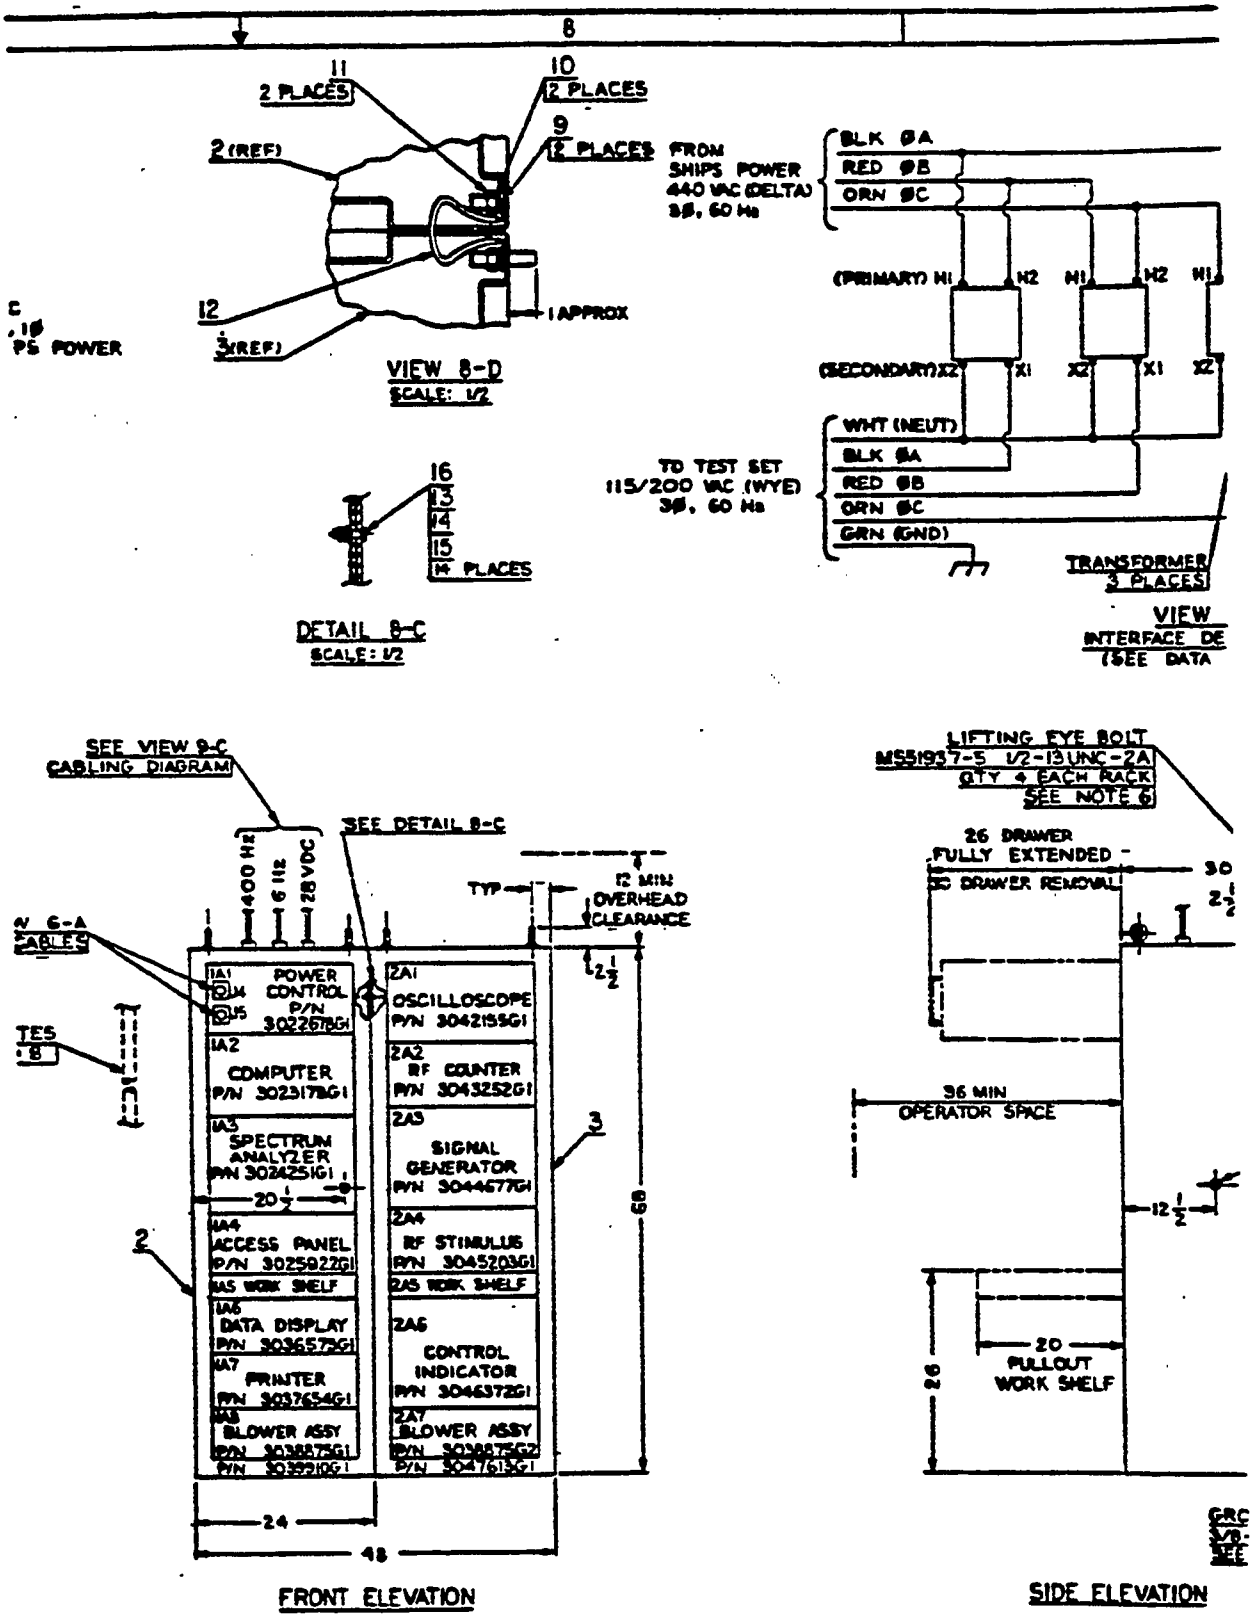


FIGURE 2. Rack or console test equipment sample data drawing -Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.

10. PREPARATION INSTRUCTIONS (Continued)

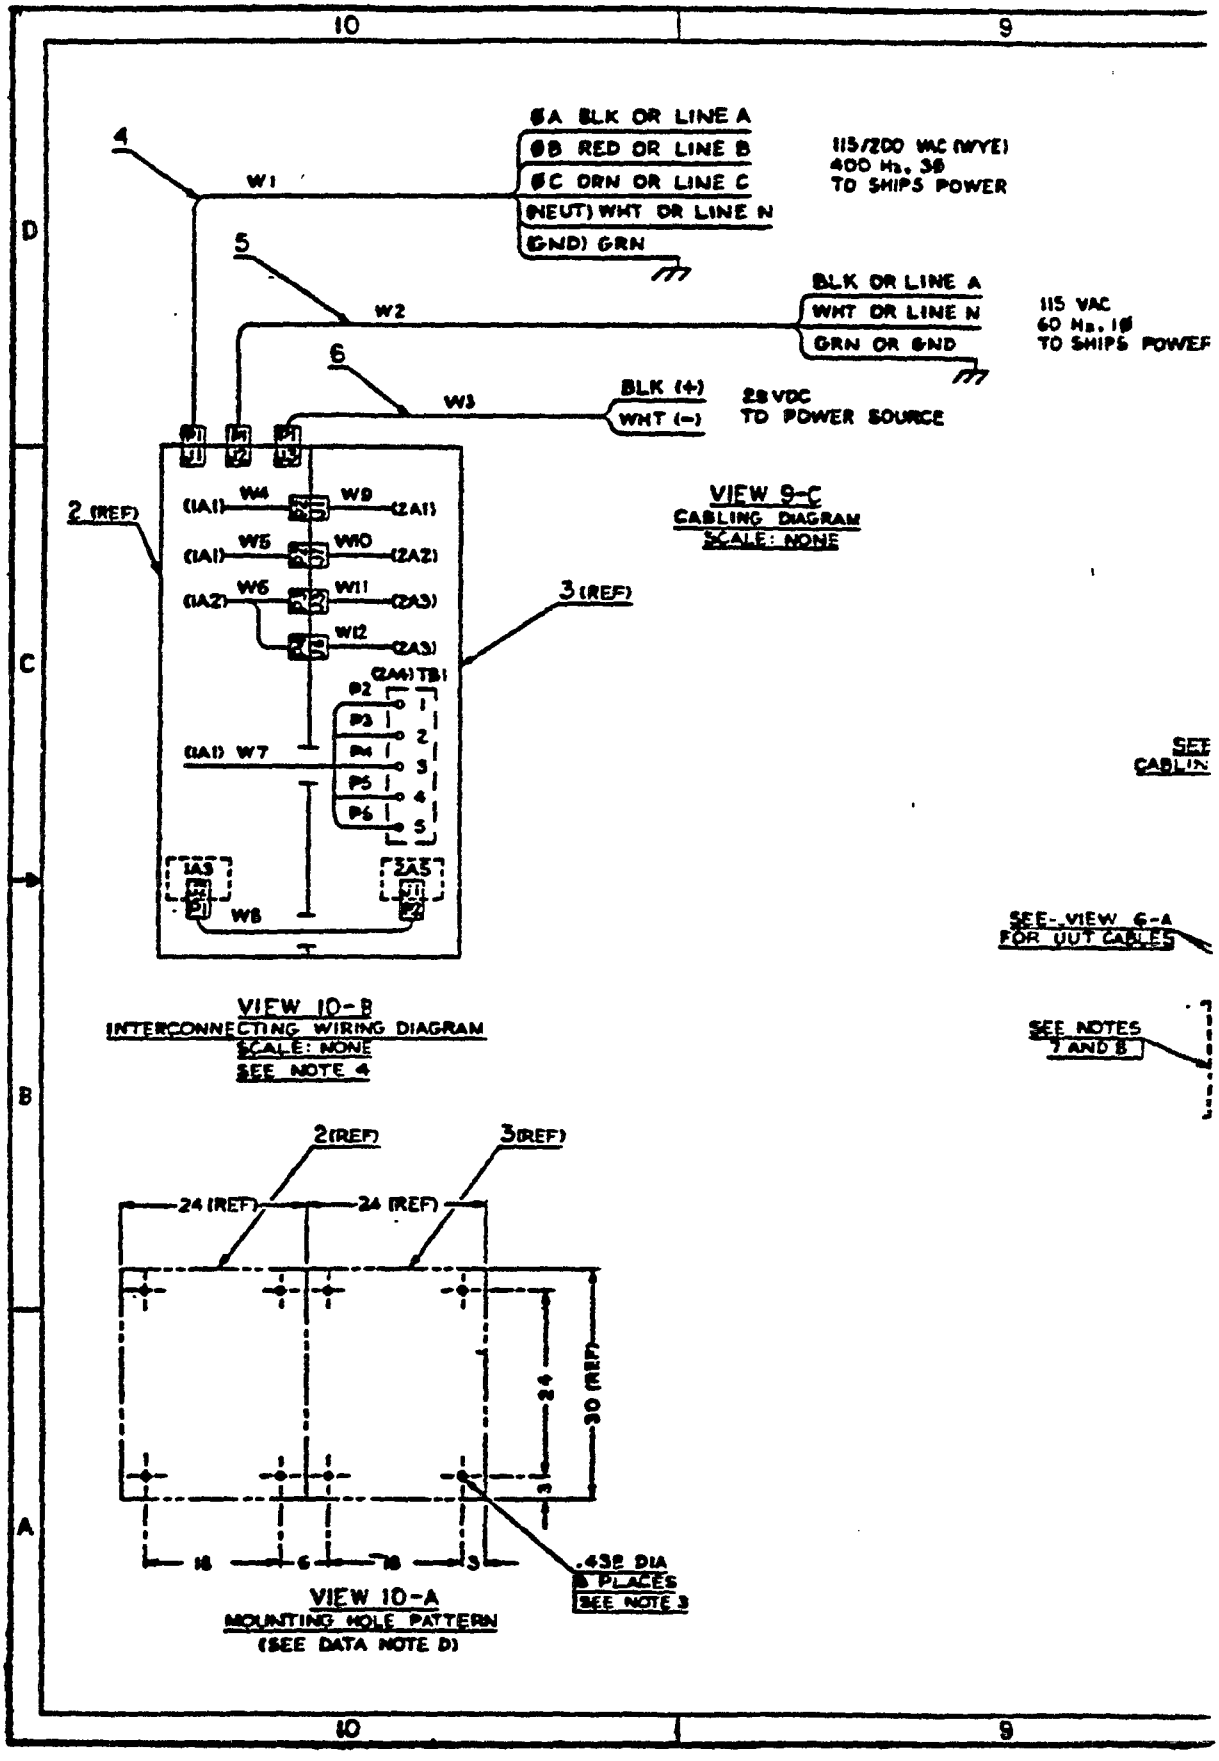


FIGURE 2. Rack or console test equipment sample data drawing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:37Z
Check the source to verify that this is the current version before use.