19 May 1977
SUPERSEDING
MIL-S-55316(EL)
29 July 1970

MILITARY SPECIFICATION
SHELTER, ELECTRICAL EQUIPMENT
S-487( )/TSM-55(V)

This specification is approved for use by the Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the air or vehicular transportable shelter facility part of the Transportable Maintenance Calibration Facility AN/TSM-55(V) (See 6.1 and 6.5).

1.2 Description.- Shelter, Electrical Equipment, S-487( )/TSM-55(V), hereinafter referred to as the shelter facility, is a mobile facility housed in a modified S-280( )/G shelter. It has special skids and is equipped with work benches, storage drawers and shelves, strap tie-downs, a combination air conditioner-heater, exhaust fans, electrical lighting and power distribution systems and various accessories. It can be transported by military truck, railroad and aircraft. It also is capable of being equipped with remountable running gear permitting it to be towed over improved and unimproved terrain. The shelter facility can have installed in it one of several complements of instrumentation selected by the user to support peculiar workload items.

2. APPLICABLE DOCUMENTS

2.1 Issues of Documents.- The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein,

Beneficial comments (recommendations, additions, deletions) and arty pertinent data which may be of use in improving this document should be addressed to Commander, US Army Electronics Command, ATTN: DRSEL-RD-TS-S, Fort Monmouth, New Jersey 07703 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-C-3885	Cable Assemblies and Cord Assemblies (for use in Electronic and Assoc. Electrical Equipment)
MIL-W-6858	Welding, Resistance, Aluminum Magnesium, Non-Hardening Steels or Alloys, Nickel Alloys, Heat Resistant Alloys, and Titanium, Spot and Seam
MIL-T-7928	Terminals, Lug and Splice, Crimp Style, Copper
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Electronic Equipment
MIL-W-45205	Welding, Gas, Metal-Arc & Gas, Tungsten Arc, Aluminum alloys, readily Weldable, for structures, excluding Armor
MIL-S-55505	Shelter, Electrical Equipment (containing equipment) packaging of

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedure and Tables for Inspection by Attributes
MIL-STD-252	Wired Equipment, Classification of Visual & Mechanical Defects
MIL-STD-454	Standard General Requirements for Electrical Equipment
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

MIL-STD-1235	Single & Multilevel Continuous Sampling Procedures & Tables for Inspection by Attributes
MIL-STD-1472	Human Engineering Design Criteria for Military Systems, Equipment and Facilities.

DRAWINGS

ELECTRONICS COMMAND

DL-SC-B-595527	Shelter, Electrical Equipment S-487( )/TSM-55(V)
SC-D-595528	Schematic
SC-D-595529	Wiring Diagram
SC-DL-633280	Mobilizer Assy S-280B/G

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and number or symbol should be stipulated when requesting copies).

3. REQUIREMENTS

3.1 First Article.- When specified in the contract or purchase orders the contractor shall furnish first article units in accordance With 4,3.

3.2 Construction.- The shelter facility shall be constructed in accordance with the drawings as listed on MIL-SC-B-595527 (See 3.23).

3.3 Electrical installation.- *(See* 4.6)

3.3.1 Power system wiring and components.- Installation and wiring of power wires and components shall be in accordance with the drawings unless otherwise stated. The completed in-place power distribution system shall meet the following requirements:

3.3,1.1 Continuity of conductors.- There shall be point-to-point circuit continuity on all power-line circuits and the resistance of the continuous circuit shall not exceed 3 ohms when tested in accordance with 4.6.1 and 4.6.1.1.

3.3.1.2 Dielectric breakdown voltage.- The dielectric strength of insulation of all power wires, cables, and components shall with-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

stand a potential of 500 volts DC applied continuously for not less than 30 seconds when tested in accordance with 4.6.1 and 4.6.1.2,

3.3.1,3 Insulation resistance.- The resistance of insulation between the phase conductors A to B, B to C, and C to A), between each phase conductor and neutral (A to N, B to N and C to N) and between each phase conductor and neutral to ground (A to G, B to G, C to G and N to G) shall be less than 100 megohms when tested in accordance with 4.6,1 and 4,6.1,3,

3.3.2 Power distributional and operational functions.- Main power branch distribution and circuit switching thereof shall meet the operational requirements as denoted by the power system schematic plate, when tested in accordance with 4.6.2.

3.3.3 Signal (telephone) system wiring and components.- Installation and wiring of all signal lines and components shall he in accordance with the drawings unless otherwise stated. The completed in-place signal system installation shall meet the operational requirements as stated in 4.6.3.

3.4 Running gear,- The shelter facility shall be capable of accepting either the M-707 or M-720 demountable running gear using appropriate brackets. (Contractor shall install the M-707 brackets on the shelter and the brackets for the M-729 shall be packaged and stowed within the shelter). The facility shall be tested as required by 4.7. (See 6.2f)

3.5 Vehicular transportation,- The shelter facility shall be capable of being transported over cross-country terrain, without any extra tieing, taping, etc., by military vehicles without sustaining any damage such as buckling, cracking, delamination, or other permanent deformation, (See 4,8)

3,6 Rail transportation.- The shelter facility, without any extra tieing, taping etc., shall be capable of being loaded, blocked, and braced on a flatcar for shipment by rail and shall be subjected to and withstand the test of 4.9 without sustaining any buckling, cracking, delamination, or other permanent deformation.

3,7 Drop tests.- The shelter facility shall be capable of withstanding drops of 18 inches onto concrete. After all

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

drop tests of 4.10.1 and 4.10.2 there shall be no buckling, cracking, delamination or other permanent deformation.

3.8 Watertightness.- The shelter facility shall be capable of withstanding the test of 4.11. During and after the test there shall be no leakage into the facility or its walls, floor, roof or doors.

3.9 Fording.- The shelter facility shall be capable of withstanding the test of 4.12. During and after the test there shall be no leakage into the facility or its walls, floor or doors.

3.10 Mounting inserts.- All mounting inserts shall be installed without the use of any auxiliary materials such as adhesive and, when installed, each insert shall be capable of withstanding the tensile load and the torque load referenced in 4,13. There shall be no damage or permanent distortion to the shelter mounting surface or insert head or threads and the inserts shall not have rotated from its original position. Insert threads shall be free of paint.

3.11 Cleaning.- (See 3.23 and 4.4)

3.11.1 Parts.- After fabrication, parts shall be cleaned in accordance with good commercial practice or as specified in the applicable portions of Specification MIL-F-14072. cleaning processes shall have no deleterious effect. Corrosive material shall be removed completely before the parts are assembled. After assembly, units shall be cleaned thoroughly and shall be free from particles of solder, flux, scale, and any other foreign material. In addition, when necessary, such cleaning shall also be performed before and after final assembly of the units.

3.11.2 Units.- After assembly, the equipment shall be cleaned thoroughly and shall be free from excess solder or flux, loose hardware, and other foreign material.

3.12 Finish.- The shelter facility shall be finished in accordance with Specification MIL-F-14072 and the equipment drawings (See 3.23 and 4.4).

3.13 Marking.- (See 3.23 and 4.4)

3.13.1 General.- Marking shall conform to Specification MIL-M-13231 and the drawings.

3.13.2 Nameplates.- Shelter facility shall be provided with a

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

nameplate in accordance with the drawings. Each nameplate shall be imprinted with a sequential serial number.

3.13.3 Aircraft loading data plate.- The shelter facility shall be provided with data plates in accordance with the drawings, imprinted with the dimensions which locate the center-of-gravity of the shelter facility and the assemblage in the three planes; the-gross weight of the shelter facility and assemblage; and the bearing pressure on the bottom of the skids. The shelter assemblage is the shelter facility with operational equipments or dummy loads in place. The location of the centers-of-gravity shall be determined by the contractor using the first article of production.

3.13.4 Interior and exterior marking.- All interior and exterior markings shall be as defined on the drawings.

3.14 Riveting.- Riveted joints shall be tight, the joined parts shall be undamaged, and the rivet heads shall be properly seated and tight against their bearing surfaces. Rivets shall conform to requirement 12 of MIL-STD-454 (See 3.23 and 4.4).

3.15 Seal, water vapor.- All joints of the framing for the exhaust blowers, power, signal, and video entrance boxes, and any other framed openings shall be sealed to provide a barrier against the entrance of water vapor to the core material of the shelter panels and to the interior of the shelter. All joints and edges shall be assembled and sealed in a manner to prevent collection and retention of moisture. All exterior rivets, screws and fasteners shall be dipped in sealer prior to installation. The sealer shall be a one-part sealant Silastlc, 738 as made by Dow Corning, or equal using the manufacture recommended primer. (See 3.23 and 4.16).

3.16 Securing of parts.- Brackets, lugs, flanges, inserts, bolts, and other mounting arrangements shall retain components of the facility securely so that loosening, wear of mounting arrangements, or permanent separation of parts or components will not occur when the equipment is subjected to the specified drop and transport tests. (See 3.23 and 4.16)

3.17 Soldering.- (See 3.23 and 4.16)

3.17.1 Solder and flux.- Solder and flux shall be as defined on the drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

3.17.2 Acid or acid salts.- No acid or acid salts shall be used in preparation for or during soldering; however, exception is permitted for preliminary tinning of electrical connections and for soldering of mechanical joints not used to complete electrical circuits, but in no case shall acid or acid salts be used where they can come in contact with insulation material, Where acid or acid salts are used, as permitted above, they shall be completely neutralized and removed immediately after use,

3.17.3 Process.- There shall be no sharp points or rough surfaces resulting from insufficient heating. The solder shall feather out to a thin edge, indicating proper flowing and wetting actions, and shall not be crystallized, overheated, or underheated. The minimum necessary amount of flux and solder shall be used for electrical connections. Any means employed to remove an unavoidable excess of flux shall not incur the risk of loose particles of flux, brush bristles, or other foreign materials remaining in the equipment; flux being spread over a larger area; or damage to the equipment. Insulation material that has been subjected to heating during the soldering operation shall be undamaged and parts fastened thereto shall not have become loosened.

3.18 Tropicalization of material.- Canvas, webbing, wood, etc. shall be treated to be resistant to moisture and fungi as indicated on the drawings and as follows:

3.18.1 Treating materials.- Treating materials containing a mercury-bearing fungicide shall not be used. The contractor shall determine that the treating material is compatible with the material or surface to be treated. Selection of treating materials shall be such that any increase in flammability of treated material will be held to the practical minimum,

3.18.2 Toxicity.- Treating materials shall cause no skin irritation or other injury to personnel handling the treated material during fabrication, transportation, operation; or maintenance of the equipment, or during use of the finished items when used for the purpose intended.

3.18.3 Flexibility.- Treatment shall not affect the flexibility of treated materials, to the extent that the equipment may fail to meet specified requirements when subjected to specified service conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

3.18.4 Statement of treatment.- The contractor shall submit for approval, to the contracting officer, a statement describing in detail the materials to be treated and the treating materials and processes that he proposed to use, (See 6.2d)

3.19 Welding.- Welded joints shall be as defined by the drawings and shall be such that grinding on the finished weld will be unnecessary except where grinding is on the drawings. Inert gas-shielded arch welding (MIG) using helium, argon, or a mixture of the two shall be used for arc welding of aluminum. Welds shall conform to MIL-W-6858 CL.B and MIL-W-45205 CL.B as applicable. All surfaces to be welded shall be cleaned in accordance with good commercial practice and shall be free of scale, paint, grease, and other foreign materials. Welds shall have thorough penetration and good fusion and shall be free of scabs, blisters, abnormal pock marks, cracks, voids, slag inclusions, and other harmful defects. Inert-gas-shielded arc welding shall be used for welding of aluminum except where spot welds are used, Welded assemblies shall be cleaned to remove any scale, oxidation products, and excess flux, Any acid used in cleaning shall be completely neutralized and removed. (See 4,4)

3,20 Wiring and cabling.- (See 3.23 and 4.16) Wiring and cabling shall be in accordance with the drawings and shall be neat-and sturdy.

3.20.1 Slack.- Wires and cables shall be as short as practical except that sufficient slack shall be provided:

a, To prevent undue stress on cable forms, wires, and connections,

b. To permit removal from rack of operation equipments, having wiring or cables to connectors at back of equipment, so that cable may be connected or disconnected.

c, To facilitate field repair of broken or cut wires,

d. To pervent chafing or breaking of wires due to repeated flexing of hinged parts.

3.20.2 Protection.- Wires and cables shall be so placed and protected as to avoid contact with rough or irregular surfaces or sharp

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

edges. Wires shall not be bent sharply where they enter insulation material,

3.20.3 Splicing.- Wires in a continuous run between two terminals shall not e spliced during the wiring operation unless specifically indicated by the drawings:

3.20.4 Solderless terminal lug connections,- Crimping of solderless terminal lugs shall be so accomplished that the connections will meet the resistance (voltage drop) and tensile strength requirements and tests of MIL-T-7928, (See 4,4 and 4.14)

3.20,5 Identification of wiring.- Wiring shall be identified by color-coding and wire pair marking, as indicated on the drawings.

3.20.6 Cord Assemblies,- Power cable and cord assemblies shall be fabricated in accordance with the drawings and meet the requirements and tests of MIL-C-31185, (See 4,4)

3.20.7 Testing.- Power and signal wiring of the S-487( )/TSM-55(V) shall be subjected to and pass the tests described in 4.6.

3.21 Suppression of radio frequency interference.- The motors in the exhaust fans, air conditioner, the fluorescent lighting and other electrical devices used in the shelter facility shall meet the emanation limits of MIL-STD-461 for tactical support equipment, if other than those items defined by the drawings. (See 4.4)

3.22 Interchangeability.- Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable without modification of such-items or of the equipment. (See 4. 15), Individual items shall not be hand-picked for fit or performance. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc.

3,23 Workrnanship.- (See 4.16) The equipment shall be manufactured and assembled in accordance with the applicable portions of the following paragraphs:

3.2 Construction
3.3 Electrical installation

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

3.10 Mounting inserts
3.11 Cleaning
3.12 Finish
3.13 Marking
3.14 Riveting
3.15 Seal, water vapor
3.16 Securing of parts
3.17 Soldering
3.18 Tropicalization
3.19 Welding
3,20 Wiring and cabling

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection,- Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein, Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection.- The inspections shall be classified as follows:

First article inspection (does not include packaging, (See 403) a.

b. Inspection covered by subsidiary documents. (See 4,4)

c. Quality conformance inspections.

(1) Quality conformance inspection of equipment before packaging. (See 4.5)

(2) Quality conformance inspection of packaging. (See 4.17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

4.3 First article.- Unless otherwise specified In the contract or purchase order, the first article inspection shall be performed by the contractor. (See 3.1)

4.3.1 First article units.- The contractor shall furnish one (1) first article unit of the complete S-487( )/TSM-55(V),

4.3.2 First article inspection.- The first article inspection shall consist of inspections specified in Table I and shall be performed in the order specified therein.

4.3.3 First article data.- The first article test plan and test report(s) shall be as required in the contract or purchase order.

TABLE I - First Article Inspection

Inspections	Rqr Para	Test Para
1. Inspection covered by subsidiary documents		4.4
2. Interchangeability	3.22	4.15
3. Mounting inserts	3.10	4.13,1
4. Solderless-terminal-lug connection	3.20.4	4.14
5. Visual and Mechanical	3.23	4.16
6. Electrical Installation	3*3	4.6
7, Running Gear	3.4	4.7
8. Vehicular Transportation	305	4.8
9. Rail Transportation	3.6	4.9
10. Drop Tests	3.7	4.10
11. Watertightness	3.8	4.11
12, Fording	3.9	4.12
13. Repeat 6 - Electrical Installation	3.3	4.6

4.4 Inspection covered by subsidiary documents.- The following shall be inspected under the applicable subsidiary documents as part

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

of the inspection required by this specification, and the inspection requirement specified in the contract or purchase order:

Item	Where required
Cord Assemblies	3.20.6
Finish	3,12
Interference Suppression	3.21
Marking	3.13
Riveting	3.14
Solderless terminal lug connections	3.20.4
Welding	3.19

4.5 Quality conformance inspection of equipment before packaging.- The contractor shall perform the inspection specified in paragraph 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification Rquirements.

4.5.1 Group A inspection.- Each unit on contract or purchase order shall be Inspected for conformance to the inspections specified in Table II. Lots shall be formed only from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels, and AOL's indicated in Table II.

4.5.1.1 Order of inspection within Group A.- Group A inspection shall be performed in the order listed in Table II.

TABLE 11 Group A Inspection

Inspection	Rqr Para	Test Para	AOL % Major	AOL % Minor
Visual & Mechanical	3.23	4.16	1.0	4.0*
Electrical Installation	3.3	4.6	1.0	

*All defects are major.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

4.5.2 Group B Inspection.- Group B inspection shall normally be performed on Inspection lots that have passed Group A inspection, except for Interchangeability and Mounting Insert Inspections which are performed prior to Group A. This inspection shall conform to Table III and to the special inspection levels of Table I of MIL-STD 105,

4.5.2.1 Group B sampling plans,- The Group B sampling plans for the AQL's listed in Table III shall be as follows:

AQL	Inspection Level
4.0%	S-4
2.5%	S-4

4.5.2.2 Order of inspection within Group B.- Group B inspection shall be performed on the same equipment in the order In which they appear.

TABLE III - Group B Inspection

Inspection	Rqr Para	Insp Para	AOL % (See 4.5,2.1)
Mounting insert	3.10	4,13.2	4.0
Interchangeability	3.22	4,15	4.0
Watertightness	3.8	4.11	2.5
Fording	3.9	4.12	2.5

4.5.3 Group C inspection.- This inspection shall be as listed in Table IV,

TABLE IV Group C Inspection

Inspection	Rqr Para	Insp Para
Solderless terminal lug connection	3.20.4	4.14
Running Gear	3.4	4.7

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

TABLE IV Group C Inspection (Continued)

Inspection	Rqr Para	Insp Para
Mounting inserts	3.10	4.13.1
Vehicular transportation	3.5	4.8
Rail transportation	3.6	4,9
Drops, Flat and Rotational	3.7	4.10

NOTE : The order of Inspection of Group C with respect to Groups A and B shall conform to the order specified In 4.3. The order of inspection within Group C for all inspections listed shall be as listed in Table IV Units subject to Group C Drop Tests shall subsequently be subjected to and meet the watertightness and fording tests of 4.11 and 4.12.

4.5.3.1 Sampling for inspection of solderless-terminal-lug connections.- Flve specimens of each combination of wire and terminal produced each week shall be prepared for inspection. A specimen Is a 1 foot length of wire on which a terminal lug has been applied, using the same tools and procedures used in crimping the terminal lugs in production.

4.5.3.2 Sampling for inspection of Drop Tests.- One sample, representative of the first 10 units or fraction thereof produced, shall be subjected to the drop tests. This sample shall be the same unit previously subjected to the truck and rail transportation tests of 4.5.3.3, Thereafter, one sample from each additional 150 units or fraction thereof produced shall be subjected to the drop tests.

4.5,3.3 Sampling for other inspection.- For inspection tests listed below, one unit shall be selected at random from the first 10 units or fraction thereof which have been produced, unless otherwise specified in the contract. Selection of the unit will be made by the Government.

a. Mounting inserts

b. Vehicular transportation

c. Rail transportation

d. Running Gear

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

4.5.3,4 Group C failures.- Actions required relative to Group C failures shall be as specified in the contract or purchase order.

4.5,4 Reinspection of conforming Group B and Group C sample units.- Unless otherwise specified, sample units which have been subjected to and passed Group B or GrouP C inspection or both, may be accepted on contract, provided that they are resubjected to and pass Group A inspection after repair of all visible damage.

4.5.5 Alternate Group A Audit and Group B inspection procedures.- The contractor may elect to use a continuous sampling and inspection plan instead of the lot inspection plans from MIL-STD-lO5. If this alternate is selected the procedure of implementation must be in accordance with MIL-STD-1235, "Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes". Sampling plans for the AQLs listed in Table II Group A inspection and Table III Group B Inspection of this specification shall be selected from Tables VIII, IX and X of MIL-STD-1235 which are for f=1/2. The number of units in the Production Interval shall be the entire production quantity unless otherwise specified in the contract. Before starting production contractor shall notify the contracting officer in writing which method he Intends to use. The method may not be chaneed during production without written approval of the Government,

4.6 Electrical Installation tests.- The tests of 4.6.1 thru 4.6.3 shall be performed on each shelter facility. Before applying power to the shelter facility, an electrical ground at the power entrance box shall be made, Power to be supplied shall be 208 volts AC, 60 cycles, 3 phase.

4.6.1 Power system wiring and components installation tests.- Prior to conducting power wiring and components tests of 4.6.1.1, 4.6.1.2 and 4.6.1.3, the following shall be accomplished: (Refer to power schematic plate Drawlng SC-D-595528 and diagram SC-D-595529),

a. Remove or disconnect the following electrical loads:

(1) All fluorescent lamps,

(2) All fluorescent lamp starters and ballasts from ground.

(3) Phase indicator and power indicator neon lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

(4) Air conditioner.

(5) Voltage regulator

(6) Exhaust fans.

b. Place phase switch to the OFF position.

c, Connect a power cable assembly per Figure 1 between an unregulated and a regulated power receptacle located behind the voltage regulator,

4.6.1.1 Continuity of conductors.- Continuity resistance tests to meet the requirements of 3,3.1 .1 shall be performed on each power-line circuit in accordance with the following paragraphs. A calibrated low resistance reading ohmmeter or equivalent shall be used in performing the test.

a. Place the following controls in the ON position:

(1) MASTER circuit breaker

(2) All auxiliary circuit breakers

(3) Blackout bypass switch

(4) Fluorescent switch

(5) Exhaust fan switches.

h. Measure continuity resistance from pin A of power connector IN to the following: pin X termination at the air conditioner; the brass (hot) contact of outside power receptacle; the black wire termination at each fluorescent lamp; and red wire termination at each exhaust fan. Continuity resistance measurements shall meet the requirements of 3.3.101.

c. Measure continuity resistance from pin B of power connector IN to the following: pin Y termination at the air conditioner; and brass (hot) contact of each regulated and unregulated power receptacle. Continuity resistance measurements shall meet the requirements of 3.3.1. 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

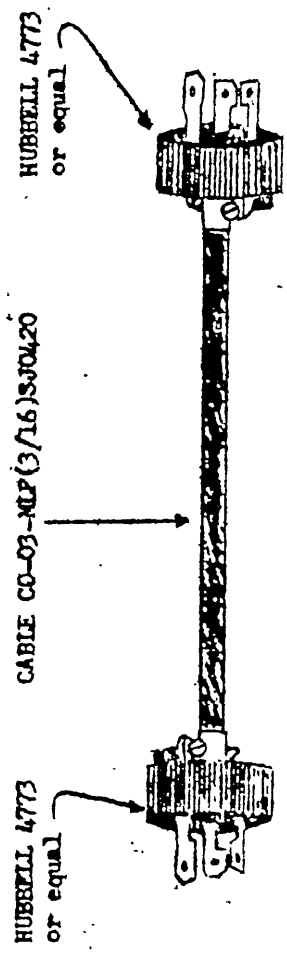


FIGURE 1 TEST CABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

d. Measure continuity resistance from pin C of power connector IN to the following: pin 2 termination at the air conditioner; and brass (hot) contact of the CONVENIENCE receptacle. Continuity measurements shall meet the requirements of 3.3.1.1.

e, Place all controls listed under a above in the OFF position.

f. Measure continuity resistance from pin N of power connector IN to the following: pin W termination at the air conditioner; white wire termination at each fluorescent lamp; white wire termination at each exhaust fan; silver (neutral) contact of each regulated and unregulated power receptacle; silver (neutral) contact at the convenience and the outside power receptacles. Continuity resistance measurements shall meet the requirements of 3.3.1.1.

g* Measure continuity resistance from the ground terminal at power entrance box to ground terminal of each regulated and unregulated power receptacle, the convenience and outside receptacles, and Pin G of the power receptacle. Continuity resistance measurements shall meet the requirements of 3.3.1.1.

h. Measure continuity resistance between power connectors IN and OUT as follows: A to A, B to B, C to C, G to G and N to N. Continuity resistance measurements shall meet the requirements of 3.3.1.1.

4.6.1.2 Dielectric breakdown voltage.- Dielectric strength tests to meet the requirements of 3.3.1.2 shall be performed on each power-line circuit in accordance with the following paragraphs. A non-destructive DC dielectric tester shall be used in performing the test.

NOTE : Take preventive measure that will preclude personnel from coming into contact with conductors under test during performance of ALL dielectric and insulation resistance tests.

a. Disconnect the phase circuit and all conductors from the voltmeter and frequency meter. Position or Isolate disconnected leads so that they do not short to ground or to other conductors.

b. Place all circuit controls listed under 4.6.l.la in the ON position except exhaust fan switches. Close shelter door tightly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

c, Test between pins A and B of power connector IN. Adjust tester for a value of not less than 500 volts DC output and maintain this potential for 30 seconds. The requirements of 3.3.1.2 shall be met.

d. Repeat c. above for the following pin connections: A to C, A to N, B to C, B to N, C to N, A to G, B to G, C to G and N to G.

e. Discharge each power-line conductor to ground following each test to eliminate danger of shock.

4.6.1.3 Insulation resistance.- Insulation resistance tests to meet the requirements of 3.3.1.3 shall be made on each power line circuit in accordance with the following paragraphs. A megohmeter or equivalent shall be used in performing the test,

a. Test between pins A and B of power connector IN. The output test voltage shall not be less than 100 volts DC nor more than 500 volts DC. Maintain this potential until the indicating meter has ceased fluctuating and indicates a steady or increasing insulation resistance. (See Note under 4.6.1 .2). The requirements of 3.3.1.3 shall be met.

b. Repeat step a above for the following pin connections: A to C A to N, R to N, B to C, C to N, A to G, B to G, C to G and N to G.

4.6.2 Power distributional and operational function tests.- Power distributional and operational function tests which meet the requirements of 3,3.2 shall be performed on each power-line circuit in accordance with the following paragraphs:

4.6.2.1 Test preparation.- (Refer to power schematic plate Drawing SC-D-595528 and wiring diagram SC-D-595529.)

Replace or reconnect all electrical loads removed or disconnected by 4.6.1a, 4.6.1c and 4.6.1.2b.

b. Place all controls listed in 4.6.1.1a in the OFF position.

c. Place a 115 volt AC test lamp with grounding plug into each receptacle.

d. Open outer exhaust port covers of both fans.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

4.6.2.2 Test of line voltmeter and phase indicator lamps.-

Apply 208 volts AC, 60 cycles, three phase power to shelter facility at power connector IN. Power indicator neon lamp near inside door entrance shall light to indicate power to the shelter, and the correct phase amber neon lamp shall light to indicate correct phase connection.

b. Measure line to line voltage by connecting a calibrated AC voltmeter between the following pins of power connector OUT: A to B, A to C, and B to C. Voltage readings shall read approximately 208 volts AC.

Measure line to neutral voltage by connecting between the following pins of power connector OUT: A to N, B to N, and C to N. Voltage readings shall read approximately 115 volts AC.

d. Place phase switch in position 1. Voltmeter inside shelter shall read ± 2% of step c reading above. Frequency meter shall indicate 60 hertz.

e. Repeat step d above for position 2 and position 3 of phase switch.

f. Place main circuit breaker in the ON position.

4.6.2.3 Test of circuit breakers and switches.-

Circuit #l.- (Air conditioner circuit breaker CB2)

a. Open exterior exhaust door to air conditioner.

b. Place circuit breaker CB2 in the ON position.

c. Place the control switch of the air conditioner to the COOL position. The air conditioner shall function properly.

d. Repeat step c above with the following settings at the air conditioner: VENTILATE, LOW HEAT, and HI HEAT.

e. Place circuit breaker CB2 in the OFF position. The air conditioner shall cease to operate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

Circuit #2.- (Lights and Exhaust FANS circuit breaker CB3)

a. Place circuit breaker CB3 in the ON position.

b. Place exhaust fan switch in the ON position. Both fans shall operate and exhaust air from the shelter.

c. Place blackout bypass and fluorescent lamp switch in the ON position. All fluorescent lamps shall light.

d. Place circuit breaker CB3 In the OFF position. All fluorescent lamps shall go out and both exhaust fans shall cease to operate.

e. Replace circuit breaker CB3 in the ON position to restore fluorescent lights and exhaust fans.

f. With shelter door open, place blackout bypass in the OFF position. All fluorescent lamps shall go out.

g. Close shelter door. All fluorescent lamps shall light.

h. Place fluorescent lamp switch in the OFF position. All fluorescent lamps shall go out.

i. Open door and restore lights by placing blackout-by-pass switch and fluorescent switch in the ON position.

Circuit #3.- (Ext Outlet Circuit breaker CB6)

Place circuit breaker CB6 in the ON position. Test lamp in outside power receptacle shall light.

b. Place circuit breaker CB6 in the OFF position. Test lamp shall go out.

Circuit #4.- (Regulated circuit breaker CB4)

Place circuit breaker CB4 in the ON position. Only test lamp in unregulated receptacles located behind voltage regulator shall light.

b. Connect AC plug of voltage regulator in art unregulated

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

power receptacle. Test lamp in regulated plugmolds shall light.

Place circuit breaker CB4 in the OFF position. All test lamps in unregulated and regulated plugmolds shall go out.

Circuit #5.- (Master Circuit breaker CB1)

a. Turn all circuit breakers, blackout bypass, fluorescent switch, exhaust fan switch, and voltage regulator to the ON position. Place air conditioner to COOL position. All fluorescent lamps shall light; external outlet test lamp shall light; unregulated and regulated test lamps in each plugmold shall light; and exhaust fans and air conditioner shall function.

b. Place Master circuit breaker CB1 in the OFF position. All lamps mentioned in a above shall go out; and exhaust fans and air conditioner shall cease to operate.

4.6.3 Signal (telephone) system wiring and components installation test.-

Connect a telephone set TA-312( )/PT to the phone binding posts at the power entrance box. Connect inside Telephone Set TA-312( )/PT to the phone lines.

b. Ring external phone to inside phone; ring inside phone to external phone; establish communications between the phones.

4.7 Running Gear Test.- The brackets for the M-720 shall be assembled and tested by measuring M-720 locating dimensions and assembling the M-720 remountable running gear when supplied as GFP (loaned). The brackets for the M-707 gear shall be assembled and tested by measuring M-707 locating dimensions (See SC-DL-633280) (See 3.4 and 6.2 f).

4.8 Vehicular transportation test.- The shelter facillty shall be secured and blocked in a government furnished truck (2 l/2T, M-35) using the standard tie-down assembly. It shall be transported over the specially prepared course described in 4.8.1 for 10 laps each at 5 mph, 10 mph, 15 mph and 20 mph for a total of 40 laps. A lap is defined as traversing the course in one direction. The shelter facility shall meet the requirements of 3.5 after completion of the test.

4.8.1 Vehicular transportation course.- The course for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

military truck transportation shall have twelve (12) 4-inch by 8-inch timbers placed 25 feet apart on the 8-inch face and with the 4-inch face fully above ground. The top edges shall have a 1 x 1-inch chamfer. The sixth and twelfth timbers shall be placed at 45 degrees to the direction of travel, and all other timbers shall be placed perpendicular to the direction of travel. The timbers shall be long enough to completely span the vehicle passing over them and shall be anchored securely by any effective means. The ground on which the timbers are placed shall be hard and level.

4.8.2 Test loading conditions.- The shelter facility shall be loaded to simulate one variation or the AN/TSM-55(V) as specified in the contract document, using live and dummy loads (See 6.2).

4,9 Rail transportation test.- The shelter facility loaded as in 4.8.2 and secured on a railroad flatcar (the test flatcar) shall be impacted by a loaded gondola car. The test shall be performed on a straight and level stretch of track. The test flatcar with its timber blocking and shelter tiedown slings (contractor furnished), shall be as specified in 4.9.1. The test flatcar (less the shelter) and two empty cars coupled to it shall each weigh 45,000 to 55,000 lbs. The loaded gondola car shall meet the provisions of the test as specified in 4.9,2 and shall have a total weight of 165,000 pounds. The loaded gondola car, traveling at 9 $\pm$ 1/2 miles per hour (or equivalent energy conditions acceptable to the government technical representative), shall be impacted against the stationary loaded test car coupled to the two empty cars, all with brakes off. All cars shall be equipped with standard travel draft gears. The test shall consist of four impacts, two from each end of the shelter. The tiedown slings, blocking, and wedges holding the shelter in place shall be tight at the start of each run. If the blocking is torn loose or any of the tiedown slings are broken during impact, the run shall he repeated. After each impact the shelter shall be examined for damage and it shall meet the requirements of 3.6.

4.9.1 Test flatcar.- The wooden planking of the test flatcar bed shall be in good condition. All 6 x 6 inch and 8 x 8 inch blocking shall he secured-to the bed of the flatcar using 10 inch spikes on 12 inch centers minimum. The 8 x 8 Inch blocking along the door end and front end of the shelter shall be in contact against the towing eye caps and against the full width of the shelter between the caps as necessary to clear the towing shackles and rivet heads. This shall he ac-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

complished by means of sawed notches, Oak wedges shall be installed between the towing eyes and the lumber to insure rigid support at these points. The blocking along the other sides of the shelter shall be in contact against the towing eye caps and along the full length of the shelter between the caps. The 4 x 4 inch and 2 x 4 inch blocking shall be nailed to the bed of the flatcar as shown in Figure 2. All other blocking shall be firmly nailed as shown in the figure. Tie-downs shall consist of four wire rope slings each including 3/8 inch diameter 6 x 19, flexible steel, preformed wire rope (having a break-down strength of 10,600 pounds minimum), a turnbuckle, and two hooks, with thimbles and fasteners as required; the breaking strength of the sling shall be 9,000 pounds minimum. Before each impact, each sling shall be taut (600 - 800 pounds tension).

4.9.2 Loaded gondola car.- The load in the loaded gondola car shall be one of the following:

a. A course size of either coal, crushed stone, gravel, crushed concrete or metal scrap (other than sheet metal, metal shavings or other springy forms of metal).


b. Chunk, slab, block, or plate forms of the preceding acceptable materials, constrained to prevent shifting.

4.10 Drop tests.-

4.10.1 Flat drop.- The shelter facility loaded as in 4.8.2 shall be lifted 18 inches from the ground to the bottom of the skids and allowed to fall freely with the skids Impacting onto a flat hard concrete surface. The test shall be performed once. Upon completion of this drop the facility shall meet the requirements of 3.7.

4.10.2 Rotational drops,- The shelter facility loaded as in 4. 8.2 shall have the roadside skid (or the knuckles of the skid) resting on a nominal 4" high timber. The outer edge of the bottom of the op-' posite skid (or the opposite knuckles of the skid) shall be raised 18 inches and the shelter facility shall be allowed to fall freely onto a flat, hard concrete surface. The test shall be repeated with the 4" high timber under the curbside skid and then across the rear, or door end of the shelter, under the skids and finally across the front end. Upon completion of these four drops, the shelter facility shall meet the requirements of 3.7,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

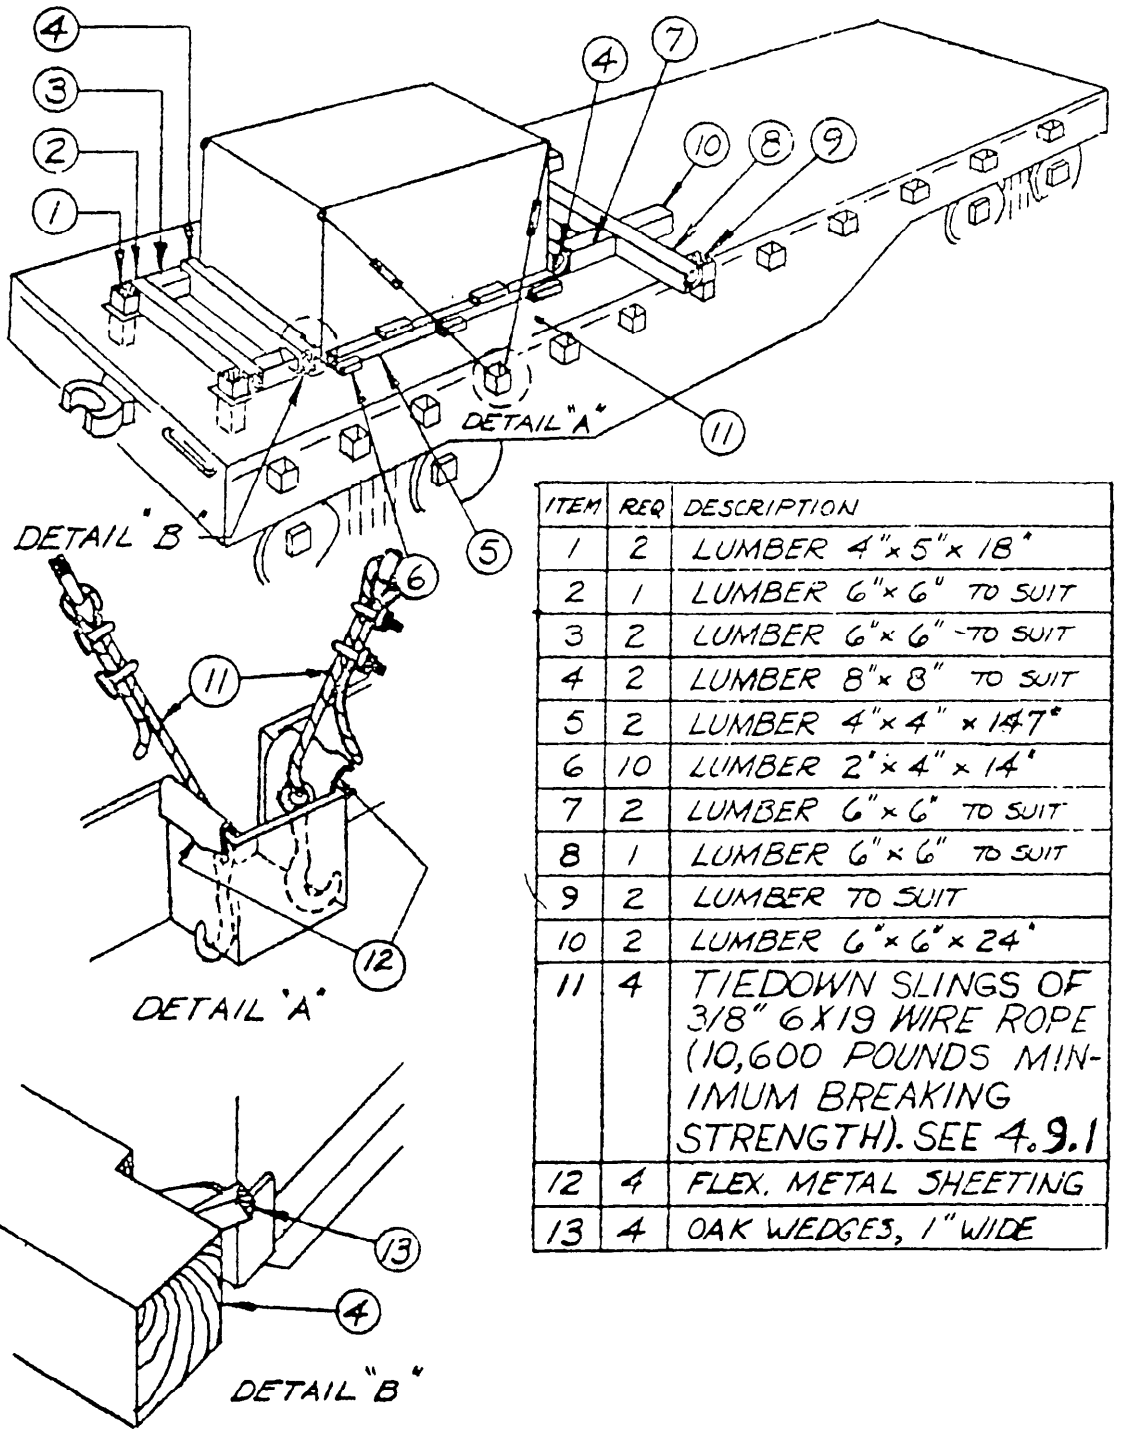

ITEM	REQ	DESCRIPTION
1	2	LUMBER 4"x 5"x 18"
2	1	LUMBER 6"x 6" TO SUIT
3	2	LUMBER 6"x 6" TO SUIT
4	2	LUMBER 8"x 8" TO SUIT
5	2	LUMBER 4"x 4" x 147"
6	10	LUMBER 2"x 4" x 14"
7	2	LUMBER 6"x 6" TO SUIT
8	1	LUMBER 6"x 6" TO SUIT
9	2	LUMBER TO SUIT
10	2	LUMBER 6"x 6"x 24"
11	4	TIEDOWN SLINGS OF 3/8" 6X19 WIRE ROPE (10,600 POUNDS MINIMUM BREAKING STRENGTH). SEE 4.9.1
12	4	FLEX. METAL SHEETING
13	4	OAK WEDGES, 1" WIDE

FIGURE 2 - SHELTER SECURED ON FLATCAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

4.11 Watertightness test.- The shelter facility, without running gear and without the use of any additional caulking, sealing, taping, etc., shall be subjected to the following test:

Each of the five exposed surfaces of the shelter, with all covers and door closed shall be sprayed with water from nozzles, model G29SQ or GG29SQ as made by Spraying Systems Co., Bellwood, Illinois, or equal, pointing directly at the surface and arranged to provide uniform coverage of the surface. Each end panel shall be tested using nine nozzles, each side using fifteen nozzles, and the roof using six nozzles. Each nozzle shall operate at a pressure of forty psig at the nozzle, and shall be located nineteen inches from the panel with the exception of the roof nozzles, which shall be at a distance of thirty-two inches, (See Figure 3 for nozzle location) Each panel shall be sprayed for a period of twenty minutes. If the watertightness test is to be followed by the fording test of 4,12 the bottom row of nozzles, with the exception of the nozzles facing the door-end panel, may he eliminated. Upon completion of the above test the shelter shall meet the requirements of 3,8. To determine that no water has entered space between the skins, holes shall be made (not less than four, not more than ten) at points to be determined by the Government at the time of testing and the shelter tilted to allow the water to run towards the hole. There shall be no evidence of water, After this determination, the holes shall be sealed with rivets and sealer.

4.12 Fording test.- The shelter facility, as prepared for-transportation on a military cargo truck, shall be immersed in water to a depth of 21 inches measured from the bottom of the shelter skids. No special fording kits shall be used in the performance of this test. No external caulking, taping, etc., shall be used except as called for on the drawings. The shelter shall be immersed and remain submerged for 1 hour, and shall be restrained by external tiedown. There shall be no evidence of leakage into the shelter, or into the walls, floor, or door. To determine that no water has entered space between the skin, holes shall be made (not less than four, not more than ten) at points to be determined by the Government at the time of testing and the shelter shall be tilted to allow the water to run towards the hole. There shall be no evidence of water. After this determination the holes shall be sealed with rivets and sealer (See 3.9).

4.13 Mounting insert tests.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

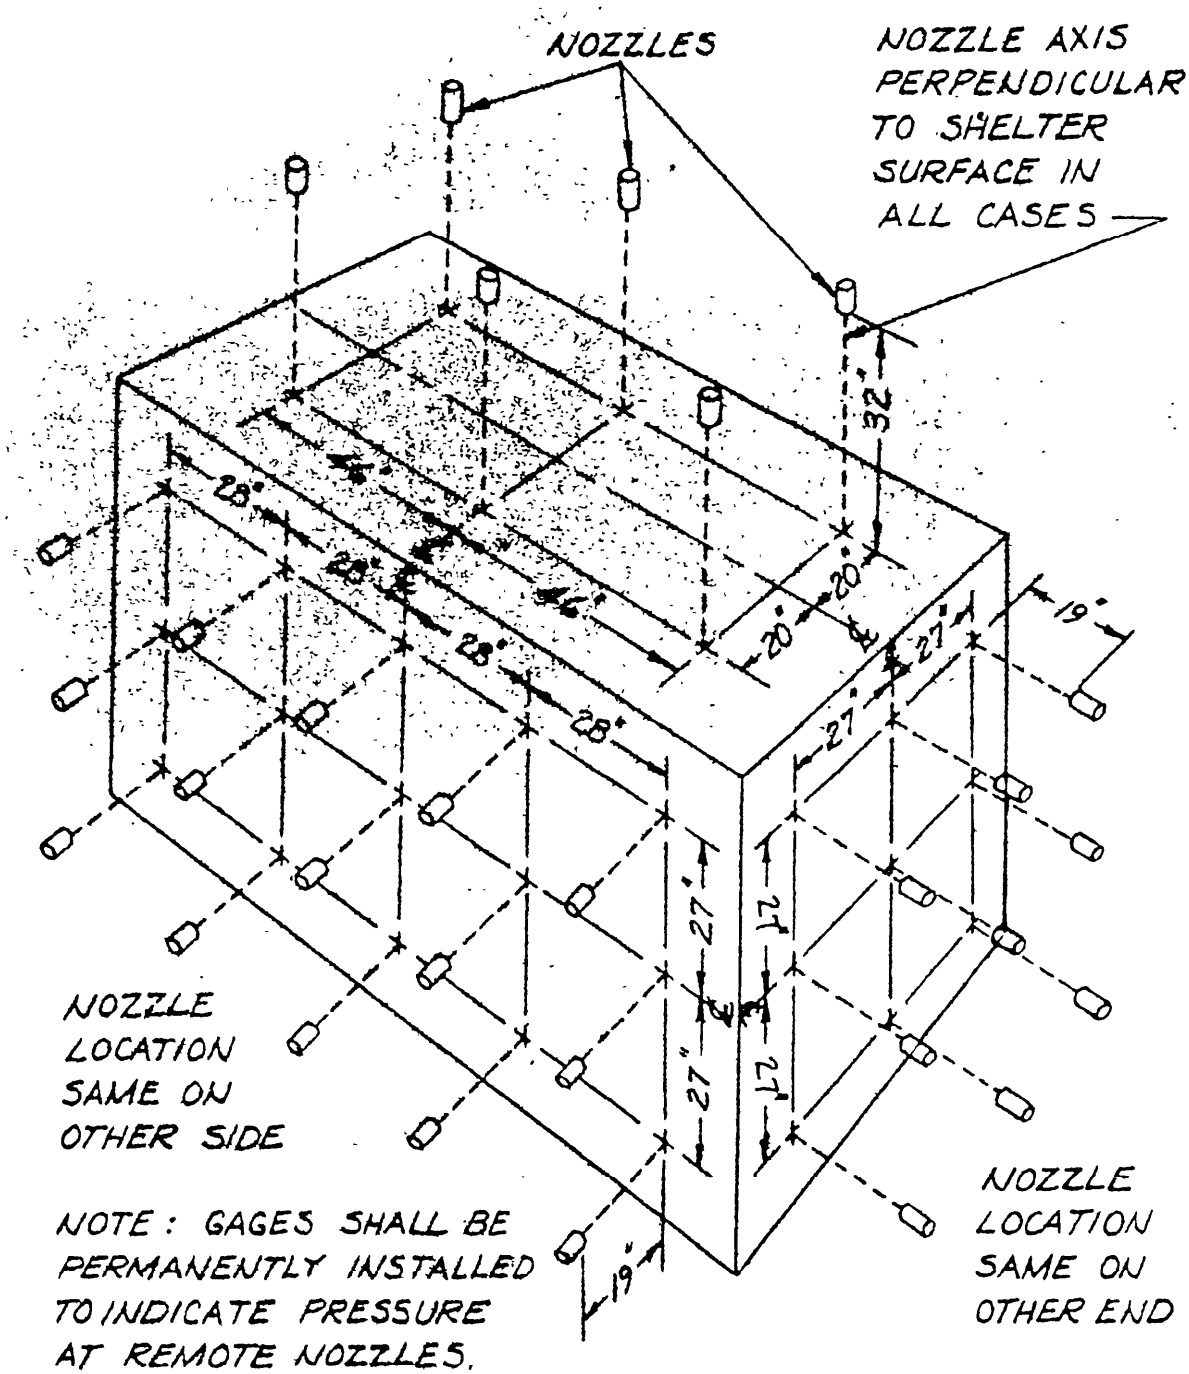


FIGURE 3 - NOZZLE LOCATIONS FOR WATERTIGHTNESS TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

4.13.1 First article and Group C insert test.- Four of each size insert shall be randomly selected for test. Each insert shall be tested with an axial load followed by a torque load in accordance with Table V. After test the requirements of paragraph 3.10 shall be met. Failure of any insert shall be caused for rejection of the sample equipment. This test shall be conducted prior to installation of brackets, racks, etc.

4.13.2 Group B Insert Test.- Five of each size insert (if the total quantity of any size is less than five, all of that size shall be tested) shall be randomly selected in each sample equipment. Each selected insert shall be tested in accordance with Table V, After test the requirements of 3.10 shall be met. Failure of any insert shall be cause for rejection of the sample equipment. This test shall be conducted prior to installation of brackets, racks, etc.

TABLE V Mounting Insert Loads

Insert	First Article and Group C Test		Group B Test	
	Axial (Lbs)	Torque (inch Lbs)	Axial (Lbs)	Torque (inch Lbs)
3/8-16	2000	150	1000	150
5/16-18	2000	100	1000	100
1/4-20	1300	60	650	60
#10-32	600	23	300	23

4.14 Testing of solderless terminal-lug connections.- Connections made with solderless termnal-lugs shall be tested for conformance with 3.20.4.

4.15 Inspection for interchanaeabilitv.- The dimensions listed below shall be gaged or measured to determine compliance with the physical interchangeability requirements of 3.22. When a dimension is not within specified or design limits it shall be considered a defect.

a. Size and mounting dimensions of brackets and mounting plates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

b. Size and mounting dimensions of racks and cabinets.

c. Size and mounting dimensions of equipment drawers.

d. Size, mounting dimensions and capacity of ventilating equipment.

4.16 Visual and mechanical inspection.- Equipment shall be examined for the detects listed in Standard MIL-STD-252, the requirements of 3.23 and Table VI.

TABLE VI Classification of Visual and mechanical defects

Classification	Defects
Major	1. Mounting plates missing or dislocated.
	2. Aircraft loading data plate, instructions or nameplates omitted, incomplete, incorrect or illegible.
	3, Welds - cracked or porous.
	4. Parts, brackets or equipment loose or missing.
	5. Drawers, slides, doors, etc. inoperative.
	6. Power receptacles, switches, jacks, wires, ducts, or other electrical components loose, improperly located or inoperative.
	7. Locking or holding devices missing or inoperative.
	8. Lock washer or lock nut missing.
	9. Burrs and sharp edges In wire duct not removed.
	10. Gaps between sections of wire duct exceed 1/16 inch
	11. Sealer improperly applied (holes, separations or lack of adhesion).
	12. Gaskets Missing
Minor	1. Drawers, slides, doors not easily operable
	2. Fastening devices difficult to operate.
	3. Finish - abrasions or scratches.
	4. Screw loose.
	5. Burrs and sharp edges on brackets not removed.
	6. Gaskets not completely and securely adhered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

4.17 Quality conformance inspection of packaging.- Packaging shall be inspected in accordance with MIL-S-55505. The requirements of 5.1 shall be met.

5. PACKAGING

5.1 Packaging requirements.- The packaging requirements shall be in accordance with MIL-S-555055 (See 4.17)

6. NOTES

6.1 Intended use.- Shelter, Electrical Equipment, S-487( )/TSY-55 (V) is the shelter facility portion of the AN/TSM-55(V). It is used to house any one of several complements of Instrumentation, selected by the user, to support electronic test equipment calibration workloads.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number, and data of this specification and any amendment thereto.

b. Level of preservation and packing (See section 5).

c. When GFP is furnished.

d. Submission of the statements of treatment referenced in 3.18.4.

Testing of the S-487( )/TSM-55(V) requires the use of contractor furnished live and dummy loads, unless otherwise specified in the bid request and contract. Dummy loads, if used, shall be configured to be retained by shelter facility hardware,

f. When M-720 remountable running gear is GFP for testing per 4,7.

6.3 Inspection.- Inspection is the examination or testing, or both, of supplies to determine compliance with applicable requirements. Sampling is an element of inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

6.3.1 Examination.- Examination consists of simple, generally non-destructive determinations of compliance, without use of special testing equipment.

6.3.2 Testing.- Testing consists of determinations of compliance, using technical means.

6.4 Group C Inspection.- Approval to ship may be withheld, at the discretion of the Government, pending the decision from the Contracting Officer on the adequacy of corrective action. (See 4.5.3.4)

6.5 Nomenclature.- The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design, for example: S-487A/TSM-55(V). The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

6.6 Verification inspection.- Verification by the Government will be limited to the amount deemed necessary to determine comlpliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

6.7 Government-loaned property.- The Contracting Officer shall arrange to loan the property listed in 4.7 and 4.8.

6.8 Changes from previous issues.- Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army - EL

Preparing Activity:
Army - EL

Project Number
4940-A399

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-S-55316A(EL) SHELTER, ELECTRICAL EQUIPMENT S-487( )/TSM-55(V)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: XXAMSELXX DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

FOLD

To detach this form cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:01Z
Check the source to verify that this is the current version before use.