TRANSMITTER, RADAR, T-749( )/FPN-40 and POWER SUPPLY PP-2489( )/FPN-40

1. SCOPE

1.1 Scope. - This specification covers one type of Radar Transmitter and its associated Power Supply, designated Transmitter, Radar, T-749( )/FPN-40 and Power Supply PP-2489( )/FPN-40 (See 6.1 and 6.3.)

2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards and drawings, of the issue in effect on the date of the invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781	Strapping, Flat; Steel
PPP-B-601	Boxes, Wood, Cleated Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-F-320	Fiberboard, Sheet, Stock and Cut Shapes
PPP-T-76	Tape, Pressure-Sensitive Adhesive, Paper, Water Resistant

MILITARY

MIL-P-116	Preservation, Methods of
MIL-S-901	Shockproof Equipment, Class HI, Shipload
MIL-P-11268	Parts, Materials, and Processes.
MIL-I-11748	Interference Reduction for Electrical and Electronic Equipment
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Signal Equipment

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-169	Extreme-Temperature Cycle
MIL-STD-170	Moisture-Resistance Test Cycle for Ground Signal Equipment
MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

DRAWINGS

ELECTRONICS COMMAND

SC-A-46439 List of Accessories for Package Tester.

(Copies of specifications, standards, drawings, and publications required by contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Both the title and the number or symbol should be stipulated when requesting copies.)

3. REQUIREMENTS

3.1 Description.-

3.1.1 Transmitter, Radar, T-749( )/FPN-40.- This unit consists of a transmitter-modulator assembly with a separate trigger shaper assembly mounted on the transmitter-modulator chassis. The trigger shaper accepts an input pulse, shapes this input signal to the desired signal and delays the output pulse from 15 to 30 microseconds (usec) as desired. The output pulse triggers the thyratron modulator portion of the transmitter-modulator assembly. The transmitter-modulator assembly shapes the transmitter output pulse to the desired configuration, triggers the magnetron oscillator at the desired frequency and amplifies the pulse to the desired output power.

3.1.2 Power Supply PP-2489( )/FPN-40.- This unit rectifies alternating-current (a-c) voltage to the required high direct-current (d-c) voltage for operation of the transmitter. The power supply is contained in a separate chassis.

3.1.3 28-volt dc relays.- These component parts of the transmitter and power supply obtain the required 28 volts dc from an external source, not part of the transmitter or power supply.

3.2 Procurement model.- A procurement model of the equipment will be available for inspection by prospective bidders and will be lent to the contractor. Unless otherwise specified herein or in the invitation for bids, physical construction of the equipment shall conform to the model. (Note: In case of conflict between specified performance characteristics for the equipment and the performance of the model, the specified performance characteristics govern.)

3.3 Preproduction samples.- The contractor shall furnish two preproduction samples, for approval, if required by the invitation for bids and contract. (See 4.3 and 6.2.)

3.4 Parts, materials, and processes, general.- In addition to the requirements of this specification, the requirements of Specification MIL-P-11268, including the selection requirements therein, shall apply.

3.4.1 Finish, protective.- Equipment shall be given a protective finish in accordance with Specification MIL-F-14072. This includes finish of hardware, such as handles, hinges, screws, etc, and necessary touch-up after mounting. The final paint film on type I surfaces shall be green color (olive drab), semigloss enamel, matching a color chip provided by the procuring agency. (See 4.4.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:39Z
Check the source to verify that this is the current version before use.

3.4.2 Marking.-

3.4.2.1 General.- Marking shall conform to Specification MIL-M-13231. (See 4.4.) Front panel marking shall be group I as described in that specification.

3.4.2.2 Visibility.- Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.4.2.3 Serial numbers.- Transmitter, Radar, T-749( )/FPN-40 and Power Supply PP-2489( )/FPN-40 shall be serial numbered.

3.5 Preconditioning.- The equipment shall be capable of meeting the requirements herein, without subsequent processing, after subjection to the bounce preconditioning of 4.6. (Also see 4.5.)

3.6 Service conditions.- The equipment shall meet the following service conditions-- where a test is referenced, meeting the test shall be considered as compliance with the requirement:

3.6.1 Operation.- Continuous use for a period of one year, under the worldwide environmental conditions specified in 3.5.2 through 3.5.9, with a duty cycle of 23 hours on and one hour off and with no more than normal maintenance and replacement of parts. Where the contractor is required to make a selection of parts, materials, processes, construction methods, etc, he shall be guided by this requirement. Approval of the preproduction sample (see 3.3) shall be considered as compliance with this requirement.

3.6.2 Temperature. (See 4.7.1.).-

(a) Operating: Ambient temperature in the range of + 150°F to -65°F; exposure at the high temperature extreme not to exceed four hours, and at the low temperature extreme not to exceed 72 hours, at any one time.

(b) Nonoperating: Exposure in the range of + 160°F to -80°F; exposure at the high temperature extreme not to exceed four hours, and at the low temperature extreme not to exceed 24 hours, at any one time.

3.6.3 Relative humidity.- Exposure to 97 percent relative humidity for 20 hours and 100 percent relative humidity (with condensation) for four hours for each 24 hour period over the period of years stated in 3.6.1. Meeting the tests of 4.7.2 shall be considered compliance with this requirement.

3.6.4 Elevation. (See 4.7.3.).-

(a) Operating: Up to 10,000 feet above sea level.

(b) Nonoperating: Up to 50,000 feet above sea level.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

3.6.5 Orientation: Operating. (See 4.7.4.)- Any orientation up to 20 degrees from normal operating position (that is: forward, backward, left, or right).

3.6.6 Vibration, internal.- The amplitude of vibration of any parts, subassembly, or structural member of the equipment shall not exceed twice the amplitude of the vibration applied to the equipment at any frequency between 10 and 55 cycles per second. (See 4.7.5.)

3.6.7 Bounce.- The equipment shall show no physical damage after subjection to the bounce test of 4.7.6.

3.6.8 Shock; ballistic.- The equipment shall show no physical damage and shall pass the test of 4.7.4 after subjection to the ballistic shock conditions of 4.7.7.

3.6.9 Shock, bench-handling. (See 4.7.8.).- The equipment shall show no physical damage except surface abrasion and shall pass the test of 4.7.4 after subjection to shocks simulating those normally occuring during servicing.

3.7 Electrical requirements.-

3.7.1 Power Supply PP-2489( )/FPN-40.-

3.7.1.1 High voltage delay. (See 4.8.1.2.).- Protective circuits in the power supply shall operate as follows:

(a) Start of operation - filament power on; plate primary power off.

(b) After delay of from 270 to 330 seconds - plate power at lowest level on.

(c) After an additional two to four seconds - plate power equivalent to setting of POWER SELECT WIDE PULSE switch on.

3.7.1.2 Power select switch control relay. (See 4.8.1.3.).- It shall be possible to change the high voltage appearing at jack J2302 from the value selected on POWER SELECT WIDE PULSE switch S2 to that selected on POWER SELECT SHORT PULSE switch S1 by energizing pulse width selector relay from an external source.

3.7.1.3 Power input. (See 4.8.1.4.).- The power supply shall be capable of delivery the voltages and currents specified in 3.7.1.4 when connected to power sources as indicated in table I.

Table I. - Power supply input power

Voltage	Frequency
115 volts ± 10% 28 volts ± 10%	47.5 cps to 63 cps dc

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

3.7.1.4 High voltage output. (See 4.8.1.4).- The high-voltage output of the power supply in kilovolts (kv) at the indicated loads in milliamperes (ma) shall be as shown in table II. (See 4.8.1.3.)

Table II.- High voltage range

POWER SELECT SIDE PULSE and SHORT PULSE	Load	High-voltage output
1	130 ma	2.75 to 3.25 kv
2	135 ma	2.89 to 3.43 kv
3	140 ma	3.03 to 3.60 kv
4	145 ma	3.18 to 3.78 kv
5	150 ma	3.34 to 3.98 kv
6	155 ma	3.47 to 4.13 kv
7	160 ma	3.7 to 4.4 kv
8	165 ma	3.78 to 4.5 kv
9	170 ma	3.93 to 4.65 kv
9	0 ma	greater than 5.0 kv but less than 6.0 kv

3.7.1.5 Overload current relay. (See 4.8.1.5).- The overload current relay shall be energized when a load of 180 to 260 ma is applied to the high voltage output at jack J2302.

3.7.1.6 High voltage reset control. (See 4.8.1.6.)- It shall be possible to reapply primary plate power by applying 28 volts dc from an external source.

3.7.1.7 Panel meter. (See 4.8.1.7).- The panel meter shall indicate the voltage supplied at jack J2302 within ± 0.3 kv.

3.7.1.8 Ripple voltage. (See 4.8.1.8.)- Ripple voltage as measured at jack J2302 shall not exceed 30 v ac, peak-to-peak with a 130 ma load, and shall be no greater than 45 v ac with a 170 ma load.

3.7.1.9 Local HV OFF and HV RESET switches. (See 4.8.1.9).- High voltage shall disappear from the high voltage output jack J2302 when the HV OFF switch is momentarily pressed and shall reappear after the HV RESET switch is momentarily pressed.

3.7.2 Transmitter, Radar, T-749( )/FPN-40.-

3.7.2.1 Power input. (See 4.8.2.1).- The transmitter shall be capable of operation when connected to the power supply and power sources as indicated in table III.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:39Z
Check the source to verify that this is the current version before use.

Table III.- Transmitter input power

Voltage	Frequency
115 volts ± 10%	4.75 cps to 63 cps
28 volts ± 10%	DC
+300 volts ± 1%	DC
-210 volts ± 1%	DC

3.7.2.2 Filament supplies. (See 4.8.2.2 through 4.8.2.4.)- Filament and blower supply voltage shall be supplied from the transmitter main chassis to the following units through control circuit breakers:

Circuit breaker	Unit
No. 1	Damping diode filament
No. 2	Thyratron modulator and magnetron oscillator filaments, magnetron blower
No. 3	Trigger shape filaments

3.7.2.3 Magnetron filament voltmeter accuracy. (See 4.8.2.3).- The magnetron filament voltmeter shall have an accuracy of ± one volt.

3.7.2.4 Magnetron filament adjust. (See 4.8.2.4.)- The MAGNETRON FILAMENT ADJ potentiometer shall be capable of adjusting the magnetron filament voltage only when the transmitter is in the short-pulse mode of operation and short-pulse relay K3 is energized. The potentiometer shall have sufficient range to limit the magnetron output voltage, as measured at the MAGNETRON PULSE test point, to 90 volts peak.

3.7.2.5 Short pulse and wide pulse operation. (See 4.8.2.5)- It shall be possible to select either short-pulse or wide-pulse operation of the transmitter through the application of + 28 volts dc to the TAXI PULSE WIDTH terminal No. 8. With voltage applied, the transmitter shall operate in the short pulse mode. During the transfer period, when the rotary solenoid is in operation a blanking circuit shall interrup transmitter output. In the short-pulse mode, output pulses shall be 0.1 to 0.15 usec long, as measured at 0.707 of peak amplitude. In the wide-pulse mode output pulses shall be 0.5 to 0.7 usec long, as measured at 0.707 of peak amplitude.

3.7.2.6 Pulse delay. (See 4.8.2.6.)- The transmitter, shall delay the input pulse over a range of 15 to 30 usec. This delay shall take place within the trigger shaper assembly.

3.7.2.7 Carrier frequency. (See 4.8.2.7.)- The transmitter magnetron shall be adjustable to permit an operating frequency range from 9000 to 9160 mc.

3.7.2.8 Output power. (See 4.8.2.7.)- The transmitter shall provide a minimum peak power output of 180 kw over the frequency range specified in 3.7.2.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:39Z
Check the source to verify that this is the current version before use.

3.7.2.9 Transmitter spectrum.-

3.7.2.9.1 Side lobes. (See 4.8.2.8.)- Minor modes of oscillation shall be at least 5 db down from the major mode.

3.7.2.9.2 Frequency modulation. (See 4.8.2.8.)- Frequency modulation shall not be discernible in the magnetron output pulse.

3.7.3 Trigger shaper.-

3.7.3.1 Pulse characteristics. (See 4.8.3.2)- The trigger shaper assembly shall produce an output pulse with the characteristics specified in table IV when a pulse with a prf of 1500 per second, an amplitude of + 20 volts peak minimum and a duration of one to three microseconds is applied to input connector P6802.

Table IV.- Trigger shaper output characteristics.

Voltage (peak)	Rise time	Width at 50% amplitude
300-500 (350 nominal)	0.6 usec maximum	2.0 usec minimum (3.0 usec nominal)

3.7.3.2 Pulse delay. (See 4.8.3.3.)- The trigger shaper assembly shall delay the input pulse over a range of 15 to 30 usec.

3.7.3.3 Blanking control. (See 4.8.3.4.)- The trigger shaper shall interrup the amplification of control input pulses when UNBLANKING GATE terminal No. 3 of plug P6801 is ungrounded.

3.7.4 Radio interference suppression.- The equipment shall conform to Specification MIL-I-11748 and Classes I and III limits specified therein. (See 4.8.4.)

3.8 Interchangeability.- Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable, without modification of such items or of the equipment. (See 4.9.) Individual items shall not be hand-picked for fit or performance. However, matched pairs or sets when permitted, may be interchangeable as such. Reliance shall not be placed on any unspecified dimension, rating, characteristic, etc.

3.9 Final operation.- Just prior to packaging, the equipment shall be examined visually and electrically as specified in 4.10.

3.10 Technical literature, tools, and running spare parts.- Technical literature, tools, and running spare parts shall be furnished if specified in the contract. Running spare parts shall be identical to corresponding parts in the equipment furnished on the order. (See 6.2.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the currentversion before use.

3.11 Workmanship.-The equipment shall be manufactured and assembled in accordance with the applicable portions of the following paragraphs:

In Specification MIL-P-11268:

Plastic material and parts	Wiring and cabling
Cleaning	Cable clamps
Marking of items	Controls
Riveting	Fasteners for access devices
Securing of parts	Terminals, fixed
Soldering and brazing	Tube clamps
Welding	Tube shields

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection.- Inspection shall be classified as follows:

(a) Preproduction inspection (does not include preparation for delivery. (See 4.3.)

(b) Inspection covered by subsidiary documents. (See 4.4.)

(c) Quality conformance inspection.

(1) Quality conformance inspection of equipment before preparation for delivery. (See 4.4 and 4.5.)

(2) Quality conformance inspection of preparation for delivery. (See 4.12.)

4.3 Preproduction inspection.- This inspection will be performed by the Government unless otherwise specified in the contract. It shall consist of the preproduction inspection specified in table V, the inspection specified in the subsidiary documents covering the items listed in 4.4, and the inspection specified for group A, group B and group C (see table VI, 4.5.2 and 4.5.3 respectively). The preproduction inspection will normally be performed in this order: (1) vibration, (2) bounce, (3) shock, bench-handling, and (4) shock, ballistic; other preproduction inspection may precede, follow, or be interspersed between the foregoing.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

Table V.- Preproduction inspection.

Inspection (For additional preproduction inspection see 4.3.)	Req para.	Insp para.
Temperature	3.6.2	4.7.1
Moisture-resistance	3.6.3	4.7.2
Elevation	3.6.4	4.7.3
Orientation	3.6.5	4.7.4
Vibration, internal	3.6.6	4.7.5
Bounce	3.6.7	4.7.6
Shock, ballistic	3.6.8	4.7.7
Bench-handling	3.6.9	4.7.8
Radio interference suppression	3.7.4	4.8.4

4.4 Acceptance inspection covered by subsidiary documents.- The following shall be inspected under the applicable subsidiary documents as part of the acceptance inspection before preparation for delivery:

Item	Where required
Finish	3.4.1
Marking	3.4.2

4.5 Acceptance inspection of equipment before preparation for delivery.- The contractor, to demonstrate compliance with specified requirements, shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.4. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government, at its discretion, may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements. Test equipment for Government verification inspection shall be made available by the contractor. Each unit which will be subjected to group A or group B inspection shall be preconditioned after final assembly. (See 3.5.)

4.5.1 Group A inspection.- This inspection, including sampling, shall conform to table VI and the ordinary inspection procedures of Standard MIL-STD-105. Group A inspection shall be performed in any order which is satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

Table VI.- Group A inspection

Inspection	Req para.	Insp para.	AQL Major●	AQL Minor
Visual and mechanical				
Power Supply PP-2489( )/FPN-40	3.11	4.11	1.5	6.5 dphu ●●
Transmitter T-749( )/FPN-40	3.11	4.11	2.5	10.0 dphu
Trigger shaper	3.11	4.11	1.0	4.0 dphu
Electrical ●				
Power Supply PP-2489( )/FPN-40	3.7.1	4.8.1		
High voltage delay	3.7.1.1	4.8.1.2		
Power select switch control	3.7.1.2	4.8.1.3		
Power input	3.7.1.3	4.8.1.4	1.0dphu	
High voltage output	3.7.1.4	4.8.1.4	for	
Overload current relay	3.7.1.5	4.8.1.5	group	
High voltage reset control	3.7.1.6	4.8.1.6	combined	
Panel meter	3.7.1.7	4.8.1.7		
Ripple voltage	3.7.1.8	4.8.1.8		
Local HV Off and HV Reser	3.7.1.9	4.8.1.9		
Transmitter T-749( )/FPN-40	3.7.2	4.8.2		
Power input	3.7.2.1	4.8.2.7		
Filament supplies	3.7.2.2	4.8.2.2		
Magnetron filament voltmeter accuracy	3.7.2.3	4.8.2.3		
Magnetron filament adjust	3.7.2.4	4.8.2.4	1.5dphu	
Short pulse and wide pulse operation	3.7.2.5	4.8.2.5	for	
Pulse delay	3.7.2.6	4.8.2.6	group	
Carrier frequency range	3.7.2.7	4.8.2.7	combined	
Output power	3.7.2.8	4.8.2.7		
Transmitter spectrum	3.7.2.9	---		
Side lobes	3.7.2.9.1	4.8.2.8		
Frequency modulation	3.7.2.9.2	4.8.2.8		
Trigger shaper ●●●	3.7.3	4.8.3	1.0dphu	
Pulse characteristics	3.7.3.1	4.8.3.2	for	
Pulse delay	3.7.3.2	4.8.3.3	group	
Blanking control	3.7.3.3	4.8.3.4	combined	
Final operation	3.9	4.10	1%	

● All electrical defects are considered to be major.
●● dphu - defects per hundred units.
●●● This test performed only when the trigger shaper is procured separately.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:39Z
Check the source to verify that this is the current version before use.

4.5.2 Group B inspection.- This inspection shall consist of the inspection specified for interchangeability in 4.9 and shall conform to the special procedures for small sample inspection of Standard MIL-STD-105. The AQL shall be 6.5 percent defective and the inspection level shall be L-7 for normal and tightened inspection and L-5 for reduced inspection. The reduced inspection shall be R-1. Group B inspection shall normally be performed on inspection lots that have passed group A inspection and on samples selected from units that have been subjected to and met the group A inspection.

4.5.3 Group C inspection.- This inspection shall consist of the inspection specified for Moisture-Resistance in 4.7.2 and shall normally be performed on sample units that have been subjected to and met group A and group B inspection.

4.5.3.1 Sampling for inspection of equipment.- Two units from each 100 on order shall be selected for group C inspection, without regard to their quality, except that the units inspected at the start of the contract shall be selected from the first units produced.

4.5.3.2 Noncompliance.- If a sample unit fails group c inspection, the contractor shall immediately investigate the cause of failure and shall report to the Government inspector the results thereof and details of the corrective action taken on the process and all units of product which were manufactured with the same conditions, materials, processes, etc. If the Government inspector does not consider that the corrective action will enable the product to meet specified requirements, or if the contractor cannot determine the cause of failure, the matter shall be referred to the contracting officer. (See 6.5.)

4.5.4 Reinspection of conforming group B and group C sample units.- Unless otherwise specified, sample units which have been subjected to and passed group B or group C inspection, or both, may be accepted on contrac t, provided that they are resubjected to and pass group A inspection after repair of all visible damage.

4.6 Bounce preconditioning.- The unit shall be placed in its normal operation position on the table of the Package Tester, Type 1000-SC, as made by the L. A. B. Corporation, Skaneateles, New York, or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32-inch-thick strip of material under one corner or edge of the unit to a distance of three inches as the unit bounces. The unit shall be subjected to this preconditioning for one minute. After bounce preconditioning, the unit shall not be repaired, alined, cleaned, or otherwise changed prior to subjection of acceptance inspection.

4.7 Service conditions tests.-

4.7.1 Temperature test. (See 3.6.2.)- The equipment shall be subjected to the temperature cycle shown on Standard MIL-STD-169. Performance shall be as follows:

Step	Paragraph	Measurement	Performance
1, 3, 7, 10	4.8.1.4	High voltage output	Full specification performance
	4.8.2.7	Output power and carrier frequency range	Full specification performance
	4.8.3.3	Pulse characteristics	Full specification performance

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:39Z
Check the source to verify that this is the current version before use.

4.7.2 Moisture-resistance test. (See 3.6.3.)- The equipment shall be tested as follows:

4.7.2.1 Test conditions.-

(a) Do not move equipment from the humidity chamber for measurements.

(b) Start measurements not more than five minutes after power is applied to the equipment. Complete measurements as rapidly as possible. Do not leave power on after measurements have been completed.

4.7.2.2 Test method.-

(a) Dry at 130° ± 5°F for 24 hours.

(b) Condition at 77° ± 5°F and 40 to 50 percent relative humidity for 24 hours.

(c) Take measurements as specified in 4.7.2.3, and readjust or realine as necessary to meet full specification requirements.

(d) Subject to continuous cycling for five 48-hour cycles. Temperature, relative humidity, and period of time for each portion of the cycle shall conform to Standard MIL-STD-170. The measurements specified in 4.7.2.3 shall be made during the periods shown on the standard and shall comply with 4.7.2.3.

(e) After cycling has been completed, condition the equipment for 24 hours at 77° ± 5°F and 40 to 60 percent relative humidity. Then adjust for optimum performance using only those means provided by the equipment. No repair or replacement of parts shall be made. After adjustment, the equipment shall meet full specified performance for those measurements specified in 4.7.2.3.

4.7.2.3 Performance.- Measurements made during test and specified performance during cycling shall be as follows:

Paragraph	Measurement	Performance during cycling
4.8.1.4	High voltage output	Full specification performance
4.8.2.7	Output power and carrier frequency range	Full specification performance
4.8.3.3	Pulse characteristics	Full specification performance

4.7.2.4 Failure.- If any equipment fails to meet the performance specified in 4.7.2.3 during cycling, it shall be realined or readjusted once. If the equipment then fails to meet 4.7.2.3 or fails subsequently during cycling, it does not pass the test. In addition, if the equipment fails to meet full specification requirements after conditioning and adjustment, as specified in 4.7.2.2(e), it does not pass the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:39Z
Check the source to verify that this is the current version before use.

4.7.3 Elevation test. (See 3.6.4)- The equipment, placed in its normal operating position in an altitude chamber, shall be tested as follows: (Note: To check temperature stabilization, place a thermocouple on the largest internal mass centrally located within the equipment.)

(a) With the equipment placed in the chamber, operating and stabilized at room temperature, take the following measurements:

Paragraph	Measurement
4.8.1.4	High voltage output
4.8.2.7	Output power and carrier frequency range
4.8.3.3	Pulse characteristics

(b) Reduce the barometric pressure to 20.6 ± 0.1 inches of mercury (simulated 10,000 feet above sea level) and, after temperature and pressure stabilization, repeat the measurements specified in 4.7.3(a). The equipment shall meet specified performance for those measurements.

(c) Remove the power from the equipment and further reduce the barometric pressure to 3.4 ± 0.1 inches of mercury (simulated 50,000 feet above sea level). Maintain this condition for one hour.

(d) Return the chamber to ambient pressure. Apply power to the equipment and, after stabilization, repeat the measurements specified in 4.7.3(a). The equipment shall meet specified performance for these measurements.

4.7.4 Orientation test. (See 3.6.5.)- The equipment shall be inclined for a minimum of five minutes in each plane (forward, backward, left, and right) to an angle of $20 \pm \frac{3}{1}$ degrees. During inclination in each plane, the equipment shall meet specified performance for the following measurements:

Paragraph	Measurement
4.8.1.4	High voltage output
4.8.2.7	Output power and carrier frequency range
4.8.3.3	Pulse characteristics

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:39Z
Check the source to verify that this is the current version before use.

4.7.5 Test for internal vibration. - Internal vibration of the equipment shall be measured as follows, to determine conformance to 3.6.6:

(a) Secure the equipment directly to a vibration table that can be controlled within 10 percent of the specified amplitude. Mounting method shall be such that vibration within the equipment can be observed and measured. To facilitate this observation and measurement, subassemblies may be tested separately provided they are secured to the table in a manner similar to that used to mount them in the equipment.

(b) Vibrate the equipment successively in three mutually perpendicular directions over a frequency range of 10 to 55 cycles per second. The total excursion of the applied vibration shall be not less than 0.030 inch.

(c) In each of the three directions, change the frequency in steps of one cycle per second and maintain each frequency for at least 10 seconds.

(d) Measure vibration amplitudes by optical means, or by other means provided that vibration of the part is not affected by the measurement.

4.7.6 Bounce test. (See 3.6.7). - The equipment shall be tested on the Package Tester, Type 1000-SC, as made by the L. A. B. Corporation, Skaneateles, New York, or equal. Accessories shall be selected from those listed on Drawing SC-A-46439. The test shall be as follows:

(a) Cover the tester bed with a panel of 1/2-inch plywood, with the grain parallel to the drive chain. Space sixpenny nails, with the heads below the surface, at six inch intervals in a six inch square in the center.

(b) Place the equipment in its transit case, prepared for field transport, on the bed of the package tester. Limit the lateral motion, by wooden fences, to not more than three inches and not less than one inch. Additional barriers may be used to prevent tumbling, provided that the fore-and-aft motion of the equipment against the backstop is not restrained.

(c) Operate the package tester, shafts in phase, for a total of three hours at 284 ± 2 rpm. Turn the equipment at the end of each 30 minutes so it will rest on a new face.

4.7.7 Shock test, ballistic. - The test shall be conducted on the "Shock Testing Machine for Light Weight Equipment" shown in Specification MIL-S-901. The equipment shall be secured in its normal operating position to the steel test plate by means of the same fasteners used for vehicular installation of the equipment. The test shall consist of a total of nine blows: one each one-foot blow, three-foot blow, and five-foot blow on the back, side, and top of the test plate. As an alternative to reorienting the test plate for the blows on the side of the plate, equivalent rotation of the equipment under test is permissible.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T22:39Z
Check the source to verify that this is the current version before use.

4.7.8 Shock test; bench-handling.- The chassis-and-front-panel assembly shall be removed from its enclosure, as for servicing, and placed in a suitable position for servicing on a solid, two-inch fir bench top. The test shall be performed as follows, in a manner simulating shocks liable to occur during servicing:

(a) Tilt up the assembly through an angle of 30 degrees, using one edge of the assembly as an axis, and permit the assembly to drop back freely to the horizontal. Repeat, using other practicable edges of the same horizontal face as axes, for a total of four drops.

(b) Repeat "(a)", with the assembly resting on other faces, until it has been dropped for a total of four times on each face on which the assembly might practically be placed during servicing.

4.8 Electrical tests.-

4.8.1 Power Supply PP-2489( )/FPN-40.-

4.8.1.1 Test setup.- Set up the power supply for the tests specified in 4.8.1.2 through 4.8.1.9 as follows:

(a) Connect the power supply to test equipment and power source as indicated in Figure 1. Adjust the a-c source to 115 volts at 60 cps. Adjust the low voltage d-c source to 28 volts.

NOTE: Unless otherwise specified all power supply tests shall be performed with the power input voltage and frequency adjusted as in (a) above.

(b) Place all external switches in the off position. Place the plate and filament power circuit breaker switches in the off position. Place the HV RESET switc h to open and the HV OFF switch to closed.

(c) Set POWER SELECT WIDE PULSE switch to TWO and POWER SELECT SHORT PULSE switch to THREE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

4.8.1.2 High voltage delay. - Test the equipment for timed delays in the high voltage dc circuit to conform to 3.7.1 as follows:

(a) Close switch feeding 28 volts dc to HV Reset terminal No. 11. Observe external low voltage dc meter for zero volts.

(b) Close filament and plate power switches. At the same instant, start a stop watch. Observe the external low voltage dc meter and the power supply panel meter. Record time when they are activated. Record the panel meter reading.

(c) Continue to observe the panel meter and the ohmeter. Record the time when the ohmeter indicates an open circuit and the panel meter reading changes. Record the voltage.

(d) Repeat steps (a) through (d) with power inputs of 103.5v, 47.5 cps and 25.2 v dc.

(e) Repeat steps (a) through (c) with power inputs of 126.5v, 63 cps, and 30.8 v dc.

4.8.1.3 Power select switch control relay. - Close the external switch supplying 28 volts dc to terminal No. 10. Observe the panel meter for conformance to 3.7.1.2.

4.8.1.4 High voltage output. - The power supply shall be tested for conformance to 3.7.1.3 and 3.7.1.4 as follows:

(a) Adjust power input to power supply for 115 volts, 60 cps, and 28 v dc.

(b) Open switch feeding low voltage dc to terminal 10.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:39Z
Check the source to verify that this is the currentversion before use.

4.8.1.4 High voltage output. - (Cont'd)

(c) Set POWER SELECT WIDE PULSE switch to the No. 1 position.

(d) Adjust output load for 130 ma and record dc output voltage.

(e) Repeat for each of the following settings:

Switch position	Load (ma)
1	130
2	135
3	140
4	145
5	150
6	155
7	160
8	165
9	170
9	0

(f) Close switch feeding low voltage dc to terminal 10 and repeat steps (c) through (e) for each position of the POWER SELECT SHORT PULSE switch.

(g) Repeat steps (a) through (f) for power inputs of 103.5 volts at 47.5 cps, and 25.2 v dc.

(h) Repeat steps (a) through (f) for power inputs of 126.5 volts at 63 cps, and 30.8 v dc.

4.8.1.5 Overload current relay. - A gradually increasing load shall be applied to the high voltage output of jack J2302. The ammeter shall be observed for conformance to 3.7.1.5.

4.8.1.6 High voltage reset control. - The external switch supplying 28 volts dc to terminal No. 11 of jack J2301 shall be opened and then closed. The panel meter shall be observed for conformance to 3.7.1.6.

4.8.1.7 Panel meter. - With the load and power supply adjusted for an indication of 4.5 kv on the external voltmeter, the panel meter shall be observed for conformance to 3.7.1.7.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

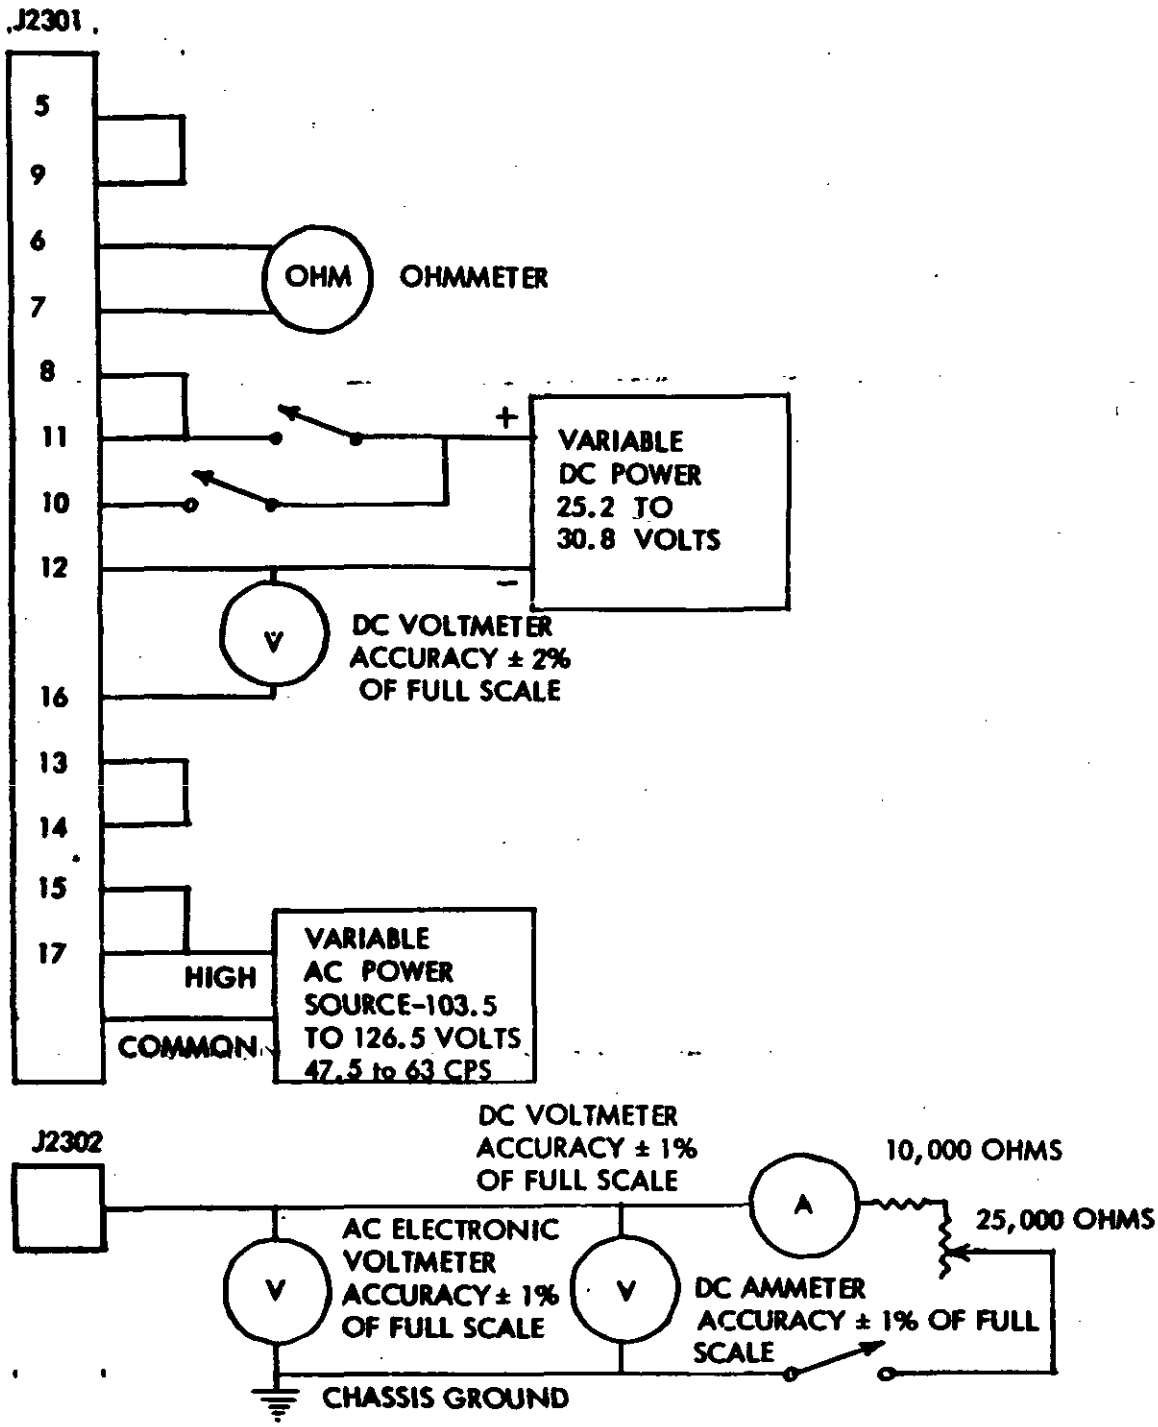


FIG. 1- Power Supply Test Setup

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

4.8.1.8 Ripple voltage test.- Set the POWER SELECT WIDE PULSE switch to the No. one position and adjust the output load for 130 ma. Measure the ac component of the output voltage. Repeat the test with the switch in the No. nine position and a 170 ma load. The results shall conform to 3.7.1.8.

4.8.1.9 HV OFF and HV RESET switches.- With the power supply energized and high voltage present at output jack J2302, the HV OFF switch shall be momentarily pressed and the external high voltage meter observed, for elimination of high voltage. The HV RESET switch shall be momentarily pressed and the meter observed for a reappearance of high voltage. The results shall conform to 3.7.1.9.

4.8.2 Transmitter, Radar T-749( )/FPN-40.-

4.8.2.1 Test setup.- Set up the transmitter for the tests specified in 4.8.2.2 through 4.8.2.8 as follows:

(a) Connect the transmitter to Power Supply PP-2489( )/FPN-40, external power sources, and test equipment as shown in Figure 2. Adjust the a-c source to 115 volts at 60 cps. Adjust the low voltage d-c source to 28 volts.

NOTE: Unless otherwise specified all transmitter tests shall be performed with the power input voltages and frequency adjusted as in (a) above.

(b) Energize the test equipment and adjust the pulse generator for a pulse repetition frequency (prf) of 1500 pulses per second, a pulse duration of one to three usec and an amplitude of 20 volts, peak minimum.

(c) Adjust the arm of the B TRIG DELAY ADJ potentiometer on the pulse generator (trigger shaper) chassis to its full clockwise(cw) position.

(d) Adjust the arm of the MAGNETRON FILAMENT ADJ potentiometer to its full counterclockwise (ccw) position.

(e) Close all external power source switches except the switch feeding +28 volts dc to terminal No. 8 of J6501 (WIDE PULSE WIDTH). Close the switch between terminals 5 and 9 of J6501.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

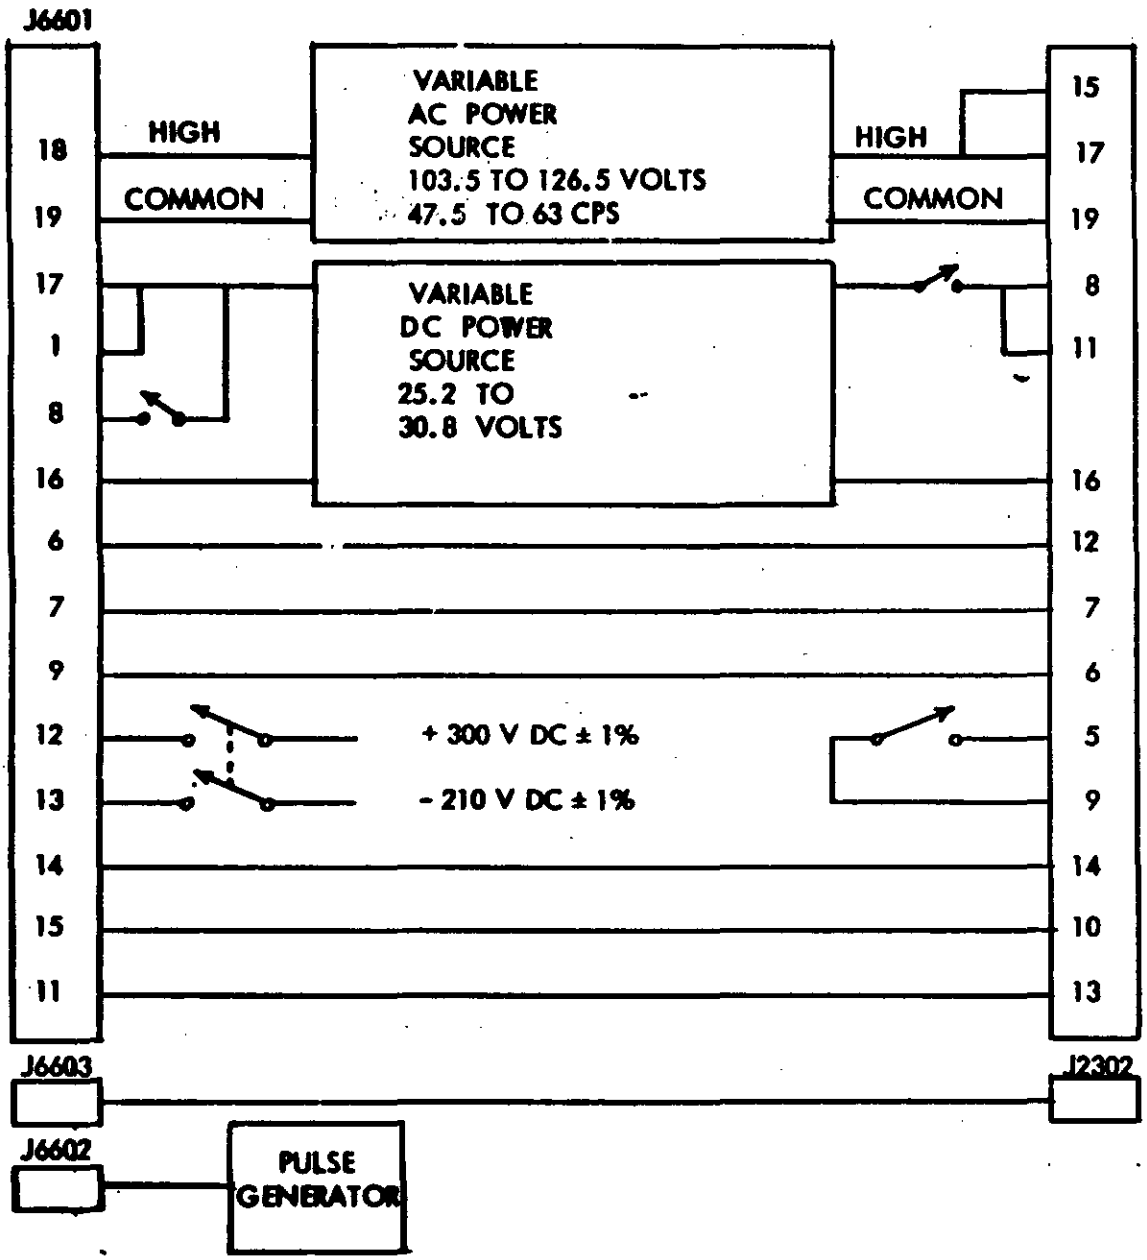


Figure 2. Transmitter Test Setup.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:39Z
Check the source to verify that this is the currentversion before use.

4.8.2.2 Filament supplies. - Test the filament supply circuits for conformance to 3.7.2.2 as follows:

(a) Close circuit breaker No. 3 in the transmitter. Observe the trigger-shaper vacuum-tube filaments.

(b) Close circuit breaker No. 1 in the transmitter. Observe the damping-diode filament.

(c) Close circuit breaker No. 2 in the transmitter. Observe the keyer vacuum-tube filament and the blower.

4.8.2.3 Magnetron filament voltmeter accuracy. - Test the magnetron filament voltmeter for conformance to 3.7.2.3 as follows:

(a) Connect an external electronic a-c voltmeter having an accuracy of ± 2 percent of indicated voltage across the magnetron filament voltmeter.

(b) Close circuit breaker No. 2 and record the voltages indicated on both the test meter and the magnetron filament voltmeter.

4.8.2.4 Magnetron filament adjust. - Test MAGNETRON FILAMENT ADJ potentiometer for conformance to 3.7.2.4 as follows:

(a) Close the switch feeding + 28 volts dc to terminal No. 8 (TAXI PULSE WIDTH) of jack J6601 to energize short pulse relay K3.

(b) Close the plate and filament circuit breakers in the power supply and the filament circuit breakers in the transmitter. Allow the time-delay circuit to operate and the units to warm up.

(c) Rotate the arm of MAGNETRON FILAMENT ADJ potentiometer from full ccw to full cw and back to full ccw. Observe the output of MAGNETRON CURRENT PULSE test point TP6601.

(d) Open the switch feeding + 28 volts to terminal No. 8 and adjust the potentiometer arm. Observe the magnetron filament voltmeter.

(e) Close the switch, adjust the potentiometer to the value specified on the transmitter front panel chart, as indicated on the magnetron filament voltmeter.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

4.8.2.5 Short pulse and wide pulse operation. - Test the transmitter for short pulse and wide pulse operation in conformance with 3.7.2.5 as follows:

(a) Connect a synchroscope to the magnetron output at test point TP6601.

(b) Close all external switches indicated in Figure 2 except the switch feeding + 28 volts dc to terminal No. 8. (TAXI PULSE WIDTH) of jack J6601. Close the filament and plate circuit breakers in the transmitter and power supply.

(c) Observe magnetron output pulse width. Measure and record the pulse data (width and height).

(d) Close the switch feeding + 28 volts to terminal No. 8. At the same time observe the rotary solenoid switch and the magnetron output pulse.

NOTE: When the solenoid switch is energized the pulse will not appear at the output. When the switch stops rotating, the wide pulse will be replaced by a short pulse.

(e) Observe the magnetron output pulse width. Measure and record the data (width and height). Rotate the arm of the MAGNETRON FILAMENT ADJ potentiometer and observe the pulse peak amplitude.

4.8.2.6 Pulse delay. - Test the pulse delay circuit for conformance to 3.7.2.6 as follows:

(a) Connect the vertical signal input of a synchroscope to test point TP6805. Connect the sync input of the synchroscope to test point TP6801.

(b) Synchronize the synchroscope to the input signal fed from the external pulse generator.

(c) Adjust the B TRIG DELAY ADJ potentiometer in the pulse generator (trigger shaper) from full clockwise to full counter clockwise and back to full clockwise. Record the time delay indications observed on the synchroscope (two extremes of the trigger delay pip).

(d) Adjust the B TRIG DELAY ADJ potentiometer until the pip is set at the midpoint of the two extremes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:39Z
Check the source to verify that this is the current version before use.

4.8.2.7 Output power and carrier frequency range. - Test the transmitter for conformance to 3.7.2.1, 3.7.2.7 and 3.7.2.8 as follows:

(a) Connect magnetron oscillator rf output to test equipment as shown in Figure 3. Adjust input voltages to the power supply as follows: 115 volts, 60 cps and 28 v dc. Mechanically adjust thermistor bridge needle for zero dbm (center scale).

(b) Turn on the test equipment and allow it to warm up.

(c) Detune frequency meter to a position off resonance.

(d) Adjust thermistor bridge balance control to provide a meter needle deflection to the balance point.

(e) Turn on the transmitter and power supply under test. Adjust for wide pulse operation. Adjust POWER SELECT WIDE PULSE switch for a voltage at the MAGNETRON CURRENT PULSE test point of as close to 90 volts peak as possible, without exceeding 90 volts. Check magnetron filament voltage and adjust if necessary.

(f) Establish a 1 mw reading on the thermistor bridge by adjusting the attenuator.

(g) Tune frequency meter for minimum meter reading. Determine operating frequency and readjust magnetron if necessary for a frequency output of 9160 mc. Record the frequency.

(h) Detune frequency meter to a position off resonance. Re-establish a 1 mw reading on the frequency meter if necessary, and calculate the input power using the formula:

Peak Power (in dbm) = Coupling loss (db)
+ Cable losses (db) + attenuator reading (db)
+ Duty cycle (db).

Convert to watts and record the determined peak power output of the magnetron.

(i) Repeat steps (e) through (h) at magnetron frequency settings of 9080 and 9000 mc.

(j) Repeat steps (e) through (i) with the transmitter in the short pulse mode of operation, using the POWER SELECT SHORT PULSE switch to adjust output.

(k) Repeat steps (e) through (j) for power inputs of 103.5 volts at 47.5 cps and 25.2 v dc.

(l) Repeat steps (e) through (j) for power input of 126.5 volts at 63 cps and 30.8 v dc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:39Z
Check the source to verify that this is the current version before use.

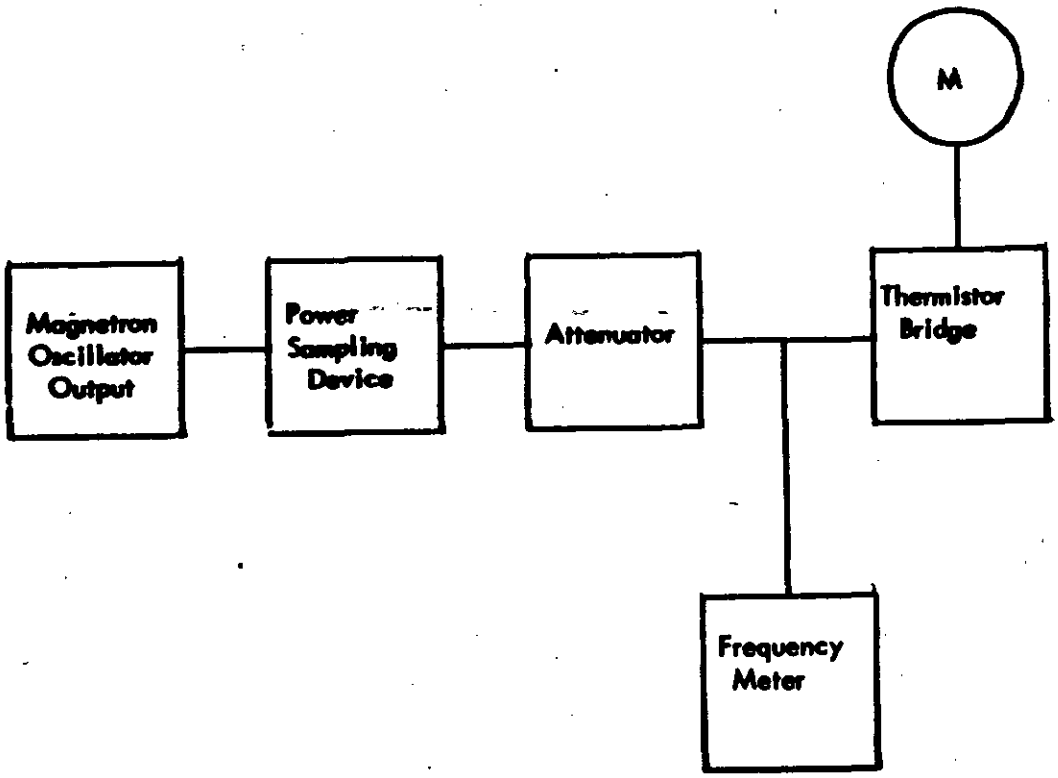


Figure 3. Transmitter power and frequency test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

4.8.2.8 Transmitter spectrum. Test the transmitter for conformance to 3.7.2.9 as follows:

(a) Connect a spectrum analyzer to the magnetron oscillator output by means of a directional coupler and attenuator. Turn on the test set, transmitter, and power supply, and allow them to warm up.

(b) Obtain an optimum spectrum pattern on the analyzer cathode ray tube.

(c) Measure the amplitude of the main lobe and the side lobes, and convert to db. The results shall conform to 3.7.2.9.1.

(d) Observe the spectrum pattern for any signs of frequency modulation, (Loss of zero points, double moding, etc.) The results shall conform to 3.7.2.9.2.

4.8.3 Trigger shaper. - (Note: The tests in 4.8.3.2 through 4.8.3.4 shall be performed only when the trigger-shaper assembly is procured as a separate unit.)

4.8.3.1 Test setup. - Set up the trigger shaper assembly for the tests specified in 4.8.3.2 through 4.8.3.4 as follows:

(a) Connect the trigger shaper assembly to external power sources and test equipment as shown in Figure 4.

(b) Close the switch grounding UNBLANKING GATE terminal No. 3.

(c) Energize the test equipment and adjust the pulse generator frequency of 1500 pulses per second, a pulse duration of one to three usec, and an amplitude of 20 volts peak minimum.

4.8.3.2 Pulse characteristics. - The synchroscope shall be adjusted and the output pulse shall be measured for peak voltage, rise time, and pulse width at 50 percent amplitude. The results shall conform to 3.7.3.1.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

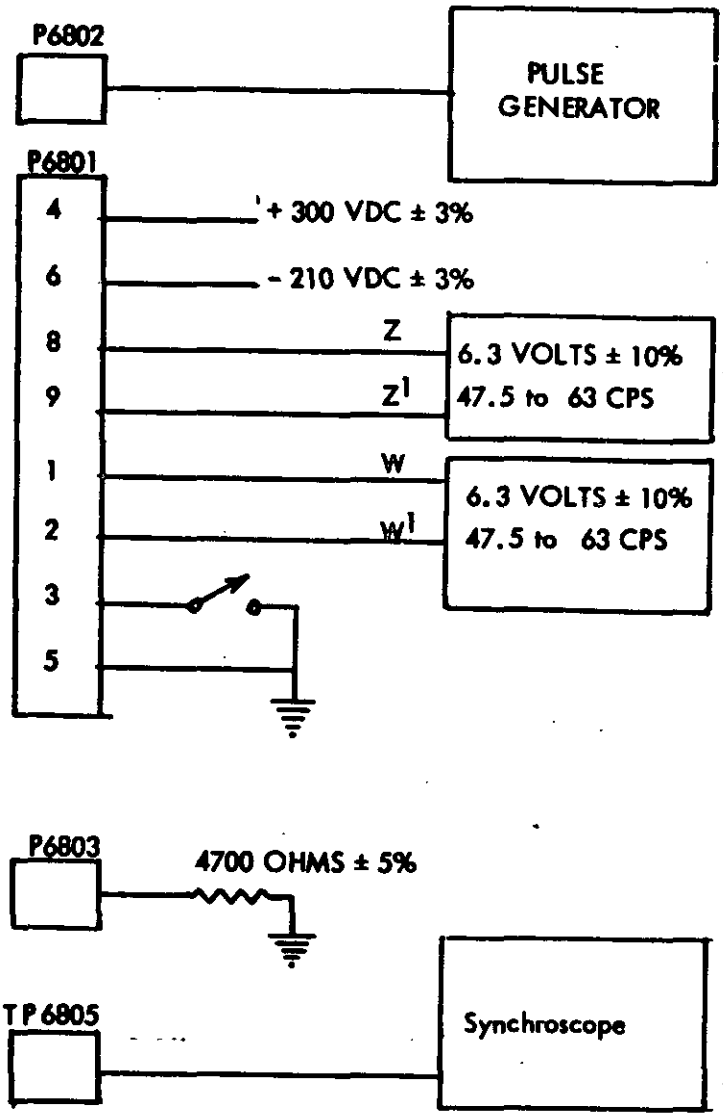


Figure 4. Trigger Shaper Test Setup.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

4.8.3.3 Pulse delay. - The trigger shaper shall be tested as specified in 4.8.2.6. The results shall conform to 3.7.3.2.

4.8.3.4 Blanking control. - The trigger shaper shall be tested with UNBLANKING GATE terminal No. 3 grounded. The output pulse shall be observed. The dwitch grounding terminal No. 3 shall be opened and the synchroscope observed. The results shall conform to 3.7.3.3.

4.8.4 Radio interference suppression. - The equipment shall be tested for unwanted rf radiation in accordance with Specification MIL-I-11748. (See 3.7.4.)

4.9 Inspection for interchangeability. - The dimensions listed below shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.8. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

(a) External and internal dimensions of cases, covers, and insertable assemblies, when such dimensions affect mating of parts.

(b) Dimensions of cavities, when such dimensions affect insertion of items.

(c) Location of hinges and fasteners on separable parts or assemblies which must mate, such as case, covers, and mountings.

(d) Location of connectors, locking pins, fasteners, slides, and mountings which receive mating parts of plug-in assemblies, and major units; and location of the mating parts on the plug-in assembly or major unit.

(e) Size and form of special threads.

4.10 Final operation. - Prior to packaging, the equipment shall be visually examined for damaged parts, loose parts, and completeness. Also, the High voltage output test (4.8.1.4) for the power supply, and the Output power test (4.8.2.7) for the transmitter, shall be met. (See 3.9).

4.11 Visual and mechanical inspection. - Equipment shall be examined for defects listed in Standard MIL-STD-252 and table VII.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:39Z
Check the source to verify that this is the currentversion before use.

Table VII. - Classification of visual and mechanical defects.

Classification	Defects
Major	Stay chain missing or broken. Carrying handle, hinge, or lid fastener attached to wrong side of case. Cover missing or inoperative. Control inoperative.
Minor	Cover reinforcement missing or improperly assembled. Control: Difficulty in getting good contact, or in making accurate setting due to play or backlash. Does not operate smoothly and freely.
Control	Carrying handle or cover difficult to operate.

4.12 Quality conformance inspection of preparation for delivery. - Preparation for delivery shall be inspected in accordance with Specification MIL-P-116 to determine conformance to the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and Packaging. -

5.1.1 Level A. - Each Transmitter T-749( )/FPS-40 and Power Supply PP-2489( )/FPN-40 shall be preserved and packaged in accordance with the procedures specified for the designated methods as prescribed in MIL-P-116 and described in the following paragraphs.

5.1.1.1 Each Transmitter T-749( )/FPN-40 and each Power Supply PP-2489( )/FPN-40 shall be packaged individually Method IC-5 as follows: Cushion each transmitter and each power supply individually on all surfaces with cells or pads or both, fabricated of fiberboard, conforming to Specification PPP-F-320, Type CF, Grade W5, Variety S.W. Place the cushion item within a close-fitting fiberboard box conforming to Specification PPP-B-636, Type I, Class 2, Grade W5, regular slotted style. Box closure shall be in accordance with the appendix of the box specification. In addition, all box seams and joints shall be sealed with water-resistant, pressure-sensitive tape, conforming to Specification PPP-T-76.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:39Z
Check the source to verify that this is the current version before use.

5.1.2 Level C.- Each transmitter T-749( )/FPN-40 and Power Supply PP-2489( )/FPN-40 shall be preserved and packaged individually in accordance with commercial practice and in a manner that will afford protection against, deterioration and physical damage during direct shipment to the first receiving activity.

5.1.3 Package performance.- Package testing shall be performed in accordance with the requirements of Specification MIL-P-116. The rough handling and functional tests will be required only when invoked in the bid request or contract (see 6.2).

5.2 Packing.-

5.2.1 Level A.- Transmitter T-749( )/FPN-40 or Power Supply PP-2489( )/FPN-40 shall be packed within a nailed wood box conforming to Specification PPP-B-621, Style 4, Class 2 or cleated-plywood box conforming to Specification PPP-B-601, Type III, Class 2, Style A. Fabricate the box to fit the contents snugly. Box closure shall be in accordance with the appendix of the box specification.

5.2.1.1 Metal strapping.- Metal strapping conforming to QQ-S-781, Type I, Class A, Grade 2, shall be applied to the shipping container in accordance with the requirements of the applicable box specification and appendix thereto.

5.2.2 Level B.- Each Transmitter T-749( )/FPN-40 or Power Supply PP-2489( )/FPN-40 shall be packed as specified in 5.2.1 except that the nailed wood box shall conform to Specification PPP-B-621, Class 1 and the cleated-plywood box, Specification PPP-B-601, Type IV, Class 1, Style A.

5.2.3 Level C.- Each Transmitter T-749( )/FPN-40 or Power Supply PP-2489( )/FPN-40 shall be packed in shipping containers of the type, size and kind commonly used for the purpose in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the rules or regulation of the common carrier applicable to the mode of transportation.

5.3 Marking.- Interior packages and exterior shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

6. NOTES

6.1 Intended use.- Transmitter, Radar T-749( )/FPN-40 shall be used to increase the transmitter power of Radar Set AN/FPN-33 or AN/FPN-40. Power Supply PP-2489( )/FPN-40 shall supply the high voltage required by thyratron stage of Transmitter, Radar, T-749( )/FPN-40.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this document and any amendment thereto.

(b) Level of packaging and level of packing required for shipment. Level A, level B or level C.)

(c) Preproduction inspection:

Preproduction pack(s) as follows:

Makeup of pack(s).
Number of each kind to be submitted.
Inspection to be performed thereon.

(d) Marking and shipping of samples.

(e) Technical literature required. (See 3.10.)

(f) Quantity of tools and running spare parts required. (See 3.10.)

6.3 Nomenclature. - The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: T-749W/FPN-40. The contractor should apply for nomenclature in accordance with the applicable clause in the contract. (See 1.1.)

6.4 Verification inspection. - Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

6.5 Group C inspection. - Approval to ship may be withheld, at the discretion of the Government, pending a decision from the contracting officer on the adequacy of the corrective action. (See 4.5.3.2.)

Project No. 5840-A014

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:39Z
Check the source to verify that this is the current version before use.