MILITARY SPECIFICATION

CIRCUIT, BAROSWITCH, GATING AND MONITORING, T-2034

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of baroswitch circuit entitled Circuit, Baroswitch, Gating and Monitoring, T-2034 which is used in the Nike Hercules warhead section.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-1169	- Packaging, Packing and Marking for Shipment of Inert Ammunition Components.
MIL-STD-1460	- Soldering of Electrical Connections and Printed Wiring Assemblies, Procedure For.

DRAWINGS

ORDNANCE CORPS

8785795	- Circuit Baroswitch, Gating and Monitoring, T-2034.
8805826	- Component Board.
EL-8816847	- Equipment List.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC: 1190

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The T-2034 circuit shall comply with all requirements specified on the drawing (dwg) 8785795, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. The contractor shall assign serial numbers as required by drawings. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated.

3.5 Continuity and function. The T-2034 circuit shall exhibit continuity and shall operate in accordance with the applicable drawings (see 4.4.1).

3.6 Environmental testing (see 4.4.2).

3.6.1 Vibration. The T-2034 circuit shall show no evidence of damage such as cracking, splitting, etc., or fail to meet the requirements of 3.5 after subjection to vibration in any direction from 10 to 55 Hertz (Hz) at 0.064-inch double amplitude (see 4.4.2.1), and during subjection to vibration in any direction from 10 to 55 Hz at 0.032-inch double amplitude (see 4.4.2.2).

3.6.2 Handling shock. The T-2034 circuit shall show no evidence of damage or fail to give the performance required after subjection to four shocks of 15 ± 1 gravity units (g) and one shock of 30 g ± 2 g. Each shock shall have a pulse time of 11 ± 1 milliseconds and shall reach its maximum amplitude in 5-1/2 milliseconds (see 4.4.2.3).

3.6.3 High temperature. The T-2034 circuit shall exhibit continuity and shall operate after exposure to a temperature of 165 ± 5°F (see 4.4.2.4), and during exposure to a temperature of 130° ± 5°F (see 4.4.2.5).

3.6.4 Low temperature. The T-2034 circuit shall exhibit continuity and shall operate after exposure to a temperature of -65° ± 5°F (see 4.4.2.6), and during exposure to a temperature of 0° ± 5°F (see 4.4.2.7).

3.6.5 Humidity. The T-2034 circuit shall show no evidence of damage nor fail to meet the requirements of 3.5 when subjected to relative humidities of 90 to 98 percent during temperatures ranging from 68° ± 5°F to 149° ± 5°F when tested as specified in 4.4.2.8.

3.7 Soldering. All soldering shall comply with requirements specified in MIL-STD-1460 (MU).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

3.8 Workmanship.

3.8.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.8.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.8.3 Burrs. Parts shall be free from burrs.

3.8.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.8.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

3.8.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 3 complete assemblies (see dwg 8785795) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table I. Tests shall be conducted in order specified in Table I.

Table I
First article inspection and tests

Inspection or Test	Dest	Non-Dest
1. Classification of characteristics (see 4.3.2.1)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

2.	Continuity and function (see 3.5)		X
3.	Vibration (see 3.6.1)	X	
4.	Handling shock (see 3.6.2)	X	
5.	High temperature (see 3.6.3)		X
6.	Low temperature (see 3.6.4)		X
7.	Himidity (see 3.6.5)	X	

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Lot formation.

4.3.1.1 Production lot. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision.

4.3.1.2 Inspection lot. A lot or batch and its formation, size, and presentation is described in MIL-STD-105, Section 5. Accordingly, a lot shall mean an inspection lot and a batch shall mean an inspection batch for the purpose of this specification. The manner in which each inspection lot or batch is to be presented and identified by the contractor, shall be designated or approved by the Government representative.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table II and Table III), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

Table II
Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	190	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

Table III
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Circuit, baroswitch, gating and monitoring, T-2034 prior to assembling cover (see dwg 8805826).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Incorrect or illegible markings	Visual
	102. Damaged conducting paths (printed circuit)	Visual
	103. Foreign matter (not removable)	Visual
	104. Incorrect protective finish (cracked, scratched, or insufficient)	Visual
	105. Improper soldered joints (see 3.7)	Visual
	106. Loose or missing hardware	Visual/Manual
	107. Cracked, damaged or missing components	Visual/Manual
Minor:		
	201. Evidence of poor workmanship (see 3.8)	Visual

4.3.2.1.2 Circuit, baroswitch, gating and monitoring, T-2034 (see dwg 8785795).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

Major:

101.	Mounting holes missing	Visual
102.	Bent or damaged pins on connector	Visual
103.	Cracked connector insert	Visual
104.	Incorrect or illegible markings	Visual
105.	Incorrect protective finish (cracked, scratched, or insufficient)	Visual
106.	Loose or missing hardware	Visual/Manual
107.	Loose or improperly mounted connector and fittings	Visual/Manual
108.	*Height of pin(s) (pins of the same diameter must all appear to be within 1/16 inch in height relative to the adjacent pins)	Visual
109.	Serialization missing or improper (see 3.4)	Visual
110.	Objective evidence relative to material missing or improper (see 3.1)	Visual

Minor:

201.	Evidence of poor workmanship (see 3.8)	Visual

*In the event pin(s) do not appear to be within 1/16 inch in height relative to the adjacent pins, Gage (see 4.3.4) shall be used to determine the variation from the normal height. Reject any pin that varies by more than 0.063 inch max. from the normal pin height of the individual connector. The normal height of the individual connector pins shall be determined by calculating the average height from measurements taken of pins adjacent to the pin that appears to be defective. The forward metal edge of the connector shall be utilized as the reference surface of all measurements of pin heights.

4.3.2.1.3 Preparation for delivery (see 5).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Preservation, packaging and packing not in accordance with MIL-STD-1169 (MU)	Visual
102.	Marking not in accordance with MIL-STD-1169 (MU)	Visual
Minor:		
201.	Evidence of poor workmanship (see 3.8)	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

	Test	Tests Classification
a.	Continuity and function	Major
b.	Vibration II (see 4.4.2.2)	Major
c.	High temperature (see 4.4.2.5)	Major
d.	Low temperature (see 4.4.2.7)	Major
e.	Humidity	Major

Of these tests, d and e are considered destructive and samples so tested shall not be returned to the lot. Destructive samples are over and above the deliverable quantity of items required by the contract.

4.3.3.1 Continuity and function. Each T-2034 circuit shall be tested in accordance with 4.4.1. If any item fails to comply with 3.5, the item shall be rejected and removed from the lot.

4.3.3.2 Vibration II, high temperature II, low temperature II, humidity. Three sample T-2034 circuits shall be selected at random from each lot of up to 300 and subjected to the tests in accordance with (4.4.2.2, 4.4.2.5, 4.4.2.7 and 4.4.2.8). For lots of 301 and over, use MIL-STD-105 with an AQL of 0.25 percent. If any T-2034 circuit fails to comply with 3.6.1, 3.6.3, 3.6.4 and 3.6.5, the lot shall be rejected.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-8816847). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3).
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

4.4.1 Continuity and function. The T-2034 circuit shall be tested for continuity of wiring (see Figure 1) and for proper function of all circuits (see Figure 2) as follows:

4.4.1.1 K1 circuit check. Ground pin 19. Connect a 28 ± 1 volt direct current (dc) power source in series through a limiting resistor to pin 36 in such manner as to limit the current to 40 ± 5 milliamperes (ma). The dc voltage drop across pins 19 and 36 shall be measured and shall not exceed 8 volts. Ground pin 36. Connect a 28 ± 1 volt dc to pin 19. The current shall be measured and shall be 40 ± 7 ma.

4.4.1.2 K2 circuit check. Ground pin 19. Connect a 28 ± 1 volt dc power source in series through a limiting resistor to pin 1 in such manner as to limit the current to 40 ± 5 ma. The dc voltage drop across pins 19 and 1 shall be measured and shall not exceed 8 volts. Ground pin 1. Connect a 28 ± 1 volt dc to pin 19. The current shall be measured and shall be 40 ± 7 ma.

4.4.1.3 K3 circuit check. Ground pin 17. Connect a 28 ± 1 volt dc power source in series through a limiting resistor to pin 16 in such manner as to limit the current to 40 ± 5 ma. The dc voltage drop across pins 16 and 17 shall be measured and shall not exceed 8 volts. Ground pin 16. Connect a 28 ± 1 volt dc to pin 17. The current shall be measured and shall be 40 ± 7 ma.

4.4.1.4 K4 circuit check. Ground pin 19. Connect a 28 ± 1 volt dc power source in series through a limiting resistor to pin 8 in such manner as to limit the current to 40 ± 5 ma. The dc voltage drop across pins 8 and 19 shall be measured and shall not exceed 8 volts. Ground pin 8. Connect a 28 ± 1 volt dc to pin 19. The current shall be measured and shall be 40 ± 7 ma.

4.4.1.5 K5 and K6 circuit check. Ground pin 26. Connect a 28 ± 1 volt dc to pin 2 and momentarily to pin 10. Measure voltage across pins 34 and 26, and across pins 3 and 26. No voltage drop shall be detected across pins 34 and 26; 28 ± 2 volts dc shall be observed across pins 3 and 26. Ground pin 26. Connect 28 ± 2 volts dc to pin 18 momentarily to pin 10. Measure voltage across pins 3 and 26 and across pins 34 and 26. No voltage drop shall be detected across pins 3 and 26; 28 ± 2 volts dc shall be observed across pins 34 and 26.

4.4.1.6 Functional check. Prior to performing tests, make the following connections:

(a) Connect a single pole single throw (spst) switch A between ground and pin 36.
(b) Connect a (spst) switch B between pins 16 and 22.
(c) Connect a (spst) switch C between pins 23 and 35.
(d) Connect a (spst) switch D between pins 4 and 20.
(e) Connect a (spst) switch E between pins 1 and 5.
(f) Connect a (spst) switch F between ground and pin 8.
(g) Connect a green lamp between 28 volts dc and pin 9.
(h) Connect a red lamp between ground and pin 29.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

(i) Connect pin 26 to ground.
(j) Connect a (spst) switch G between 28 volts dc and pin 18.
(k) Connect a (spst) switch H between 28 volts dc and pin 2.

Perform the following steps sequentially:
(a) Close switch G.
(b) Close switch B momentarily. Red lamp only lights momentarily.
(c) Close switch C momentarily. Red lamp only lights momentarily.
(d) Close switch D momentarily. Red lamp only lights momentarily.
(e) Close switch E momentarily. Red lamp only lights momentarily.
(f) Close switch F momentarily. Red lamp only lights momentarily.
(g) Return switch G to OFF position.
(h) Close switch H.
(i) Close switch A.
(j) Close switches B and C. No lamp shall have lighted.
(k) Open switch C and close Switch E. No lamp shall have lighted.
(l) Open switch B and Close Switch D. No lamp shall have lighted.
(m) Close switches B and C. No lamp shall have lighted.
(n) Close switch F. Green lamp remains lighted. Red lamp does not light.

4.4.2 Environmental testing (see 3.6).

4.4.2.1 Vibration I. The T-2034 circuit with mating connector inserted shall be secured to a vibration table and vibrated for 45 minutes in each of three mutually perpendicular axes through a frequency range of 10 to 55 Hz, at a double amplitude of 0.064 inch. The frequency shall be varied uniformly from 10 to 55 to 10 Hz, making approximately one cycle per minute. Upon completion of this test, the T-2034 circuit shall be visually inspected for mechanical failures or damage and shall be tested as specified in 4.4.1.

4.4.2.2 Vibration II. The T-2034 circuit with mating connector inserted shall be secured to a vibration table and vibrated for 45 minutes in each of three mutually perpendicular axes through a frequency range of 10 to 55 Hz at a double amplitude of 0.032 inch. The frequency shall be varied uniformly from 10 to 55 to 10 Hz, making approximately one cycle per minute. The T-2034 circuit shall be tested as specified in 4.4.1 during vibration in each of the three axes.

4.4.2.3 Handling shock. The T-2034 circuit with mating connector inserted shall receive one shock of 15 $\pm$ 1 (g) on each of its four sides and one shock of 30 $\pm$ 2 g on both the top and bottom (with connector protected).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

Each shock impluse shall reach its maximum in 5-1/2 milliseconds and shall have a pulse time of 11 + 1 milliseconds. Upon completion of this test, the T-2034 circuit shall be visually inspected for failure and shall be tested as specified in 4.4.1.

4.4.2.4 High temperature I. The T-2034 circuit with mating connector inserted shall be placed in a test chamber and then stabilized (see 6.4) at a temperature of 165° + 5°F. with a maximum relative humidity of 15 percent for ten hours minimum. It shall then be reduced to ambient room temperature (75° + 10°F.) and tested as specified in 4.4.1.

4.4.2.5 High temperature II. The T-2034 circuit with mating connector inserted shall be placed in a test chamber and the temperature of the T-2034 circuit raised, stabilized, and maintained at 130° + 5°F. with a maximum relative humidity of 20 percent for ten hours minimum. While at this temperature the T-2034 circuit shall be as specified in 4.4.1

4.4.2.6 Low temperature I. The T-2034 circuit with mating connector inserted shall be placed in a test chamber and the chamber temperature reduced and stabilized (see 6.4) at -65° + 5°F. The chamber temperature shall be held for a minimum of two hours. The T-2034 circuit shall then be raised to ambient room temperature (75° + 10°F) without the use of any forced means, and after stabilization, it shall be tested as specified in 4.4.1. Visual inspection shall reveal no damage which might ultimately result in malfunction.

4.4.2.7 Low temperature II. The T-2034 circuit with mating connector inserted shall be placed in a test chamber and the temperature of the T-2034 circuit reduced, stabilized, and maintained at 0° + 5°F for a minimum of 2 hours with a relative humidity that will produce frozen condensate. While at this temperature, the T-2034 circuit shall be tested as specified in 4.4.1.

4.4.2.8 Humidity. The T-2034 circuit with mating connector inserted shall be placed in a suitable humidity chamber and the humidity shall be maintained at 90 to 98 percent relative humidity throughout the following cycle:

(a) The temperature shall be raised to 149°F within four hours and maintained at this point for eight hours.

(b) The temperature shall then be reduced to 86°F within four hours and maintained at this point for 21 hours.

(c) The temperature shall then be reduced to 68°F within one hour and maintained at this point for four hours.

(d) The temperature shall then be raised to 86°F within one hour and maintained at this point for five hours. During this segment or cycle the T-2034 circuit shall be tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The T-2034 circuit shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169.

5.1.2 Level C. The T-2034 circuit shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169.

5.2 Packing.

5.2.1 Levels A and C. The T-2034 circuit shall be packed in accordance with the applicable instructions contained in MIL-STD-1169.

5.3 Marking. Marking shall be in accordance with MIL-STD-1169.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.

b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1 and 5.4). Data specified in 4.3.4.1 and 5.4 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-N-I.

6.4 Temperature stabilization. The temperature is considered stabilized when the greatest peaks (both highest and lowest) continually observed over 5 minutes min. do not exceed the nominal temperature plus tolerance specified.


6.5 Supersession data. This specification supersedes the requirements of Purchase Description PA-PD-1177 (Revision 1) dated 21 October 1964.

Custodian:
Army - PA

Preparing activity:
Army - PA

Project No.1190-A085

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

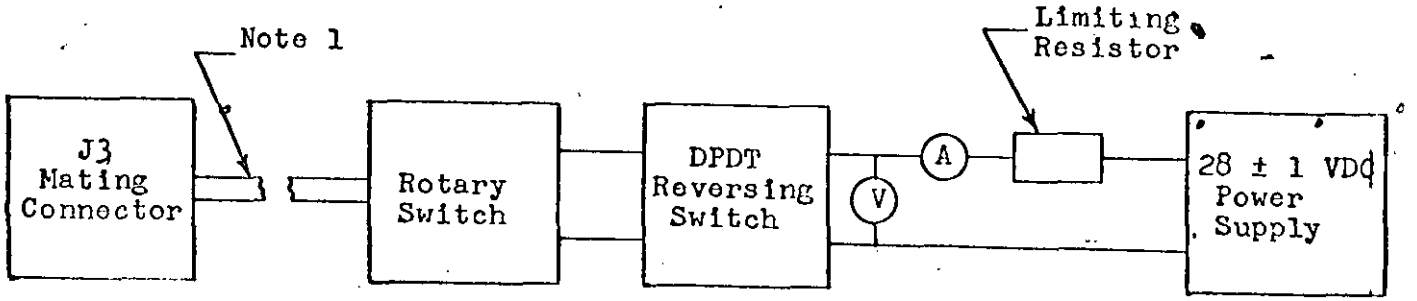

Note:

1. Cable connecting all pins under test to rotary switch.

Figure 1. Acceptable Relay Circuit Check Test Circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

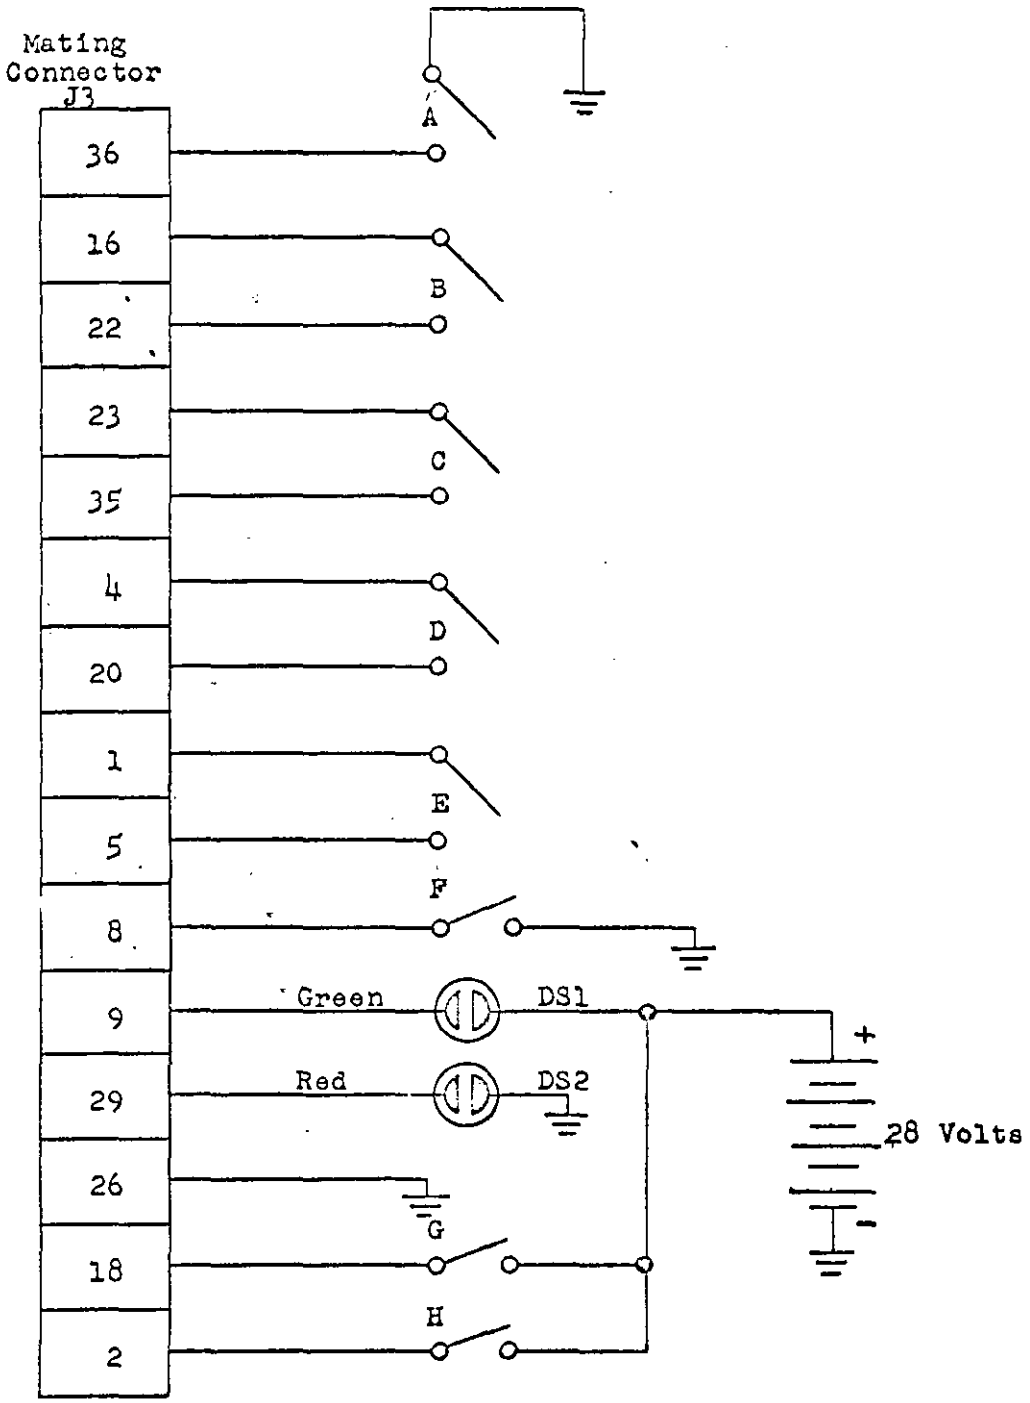


Figure 2. Acceptable Functional Check Test Circuit

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-N-Q
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.