MILITARY SPECIFICATION

TEST SET, SUBASSEMBLY MX-8046/TPM-22

(RECEIVER/TRANSMITTER TESTER)

1. SCOPE

1.1 This specification covers Test Set, Subassembly MK-8046/TPM-22 hereinafter referred to as receiver/transmitter tester, a part of the Radar Test Set AN/TPM-22. The receiver/transmitter tester makes receiver measurements and provides power and control voltages to test some of the subassemblies in Unit 2 of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extend specified herein:

FSC 4931

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel; Packaging and Packing of
MIL-I-45607	Inspection Equipment, Supply and Maintenance of
MIL-C-46357	Computer, Gun Direction; M18 Manufacturing Process and Inspection of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Method

DRAWINGS

U.S. Army, Frankford Arsenal

10554525	Test Set, Subassembly MX-8046/ TPM-22

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

PACKAGING DATA SHEET

10554525 Packaging of Test Set Sub-assembly MX-8046/TPM-22

(Copies of specification, standards, drawings and packaging data sheets required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication. - The receiver/transmitter tester shall be manufactured in accordance with Drawing 10554525 and drawings pertaining thereto.

3.2 General specification. - Where applicable, the receiver/transmitter tester shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.2.1 MIL-F-13926

a. Order of precedence

b. Dimensions and tolerances

c. Inorganic protective surface finishings

d. Part identification and marking

e. Workmanship

f. Soldering electrical connections

3.2.2 MIL-C-46357

a. Etched circuit assemblies

b. Wiring

c. Threaded fasteners

d. Marking

e. Finishes

3.3 Environmental service conditions.

3.3.1 Vibration. - The receiver/transmitter tester shall be mounted on the vibration table in normal service position. The receiver/transmitter tester shall meet the requirements of 3.4 and 3.5 after being subject to continuous vibration for two hours along each of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

three mutually perpendicular axes within the frequency range and amplitude as follows:

Frequency Range	Double Amplitude
5 to 15	0.06 inch
15 to 25	0.04 inch
25 to 55	0.02 inch

The rate of change of frequency at each frequency range shall not exceed one cycle-per-second (1 cps/sec). Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock. - The receiver/transmitter tester shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The G shock impulses shall have an acceleration of 15 gravity units (G's) and a pulse duration of 11 ± 1 milliseconds. The G value of each impulse shall be within ± 10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5-1/2 milliseconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.3.3 Altitude.

3.3.3.1 Operating. - The receiver/transmitter tester shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

3.3.3.2 Nonoperating. - The receiver/transmitter tester shall meet the requirements of 3.4 and 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 inches Hg).

3.3.4 Temperature.

3.3.4.1 Operating. - The receiver/transmitter tester shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between +32°F and +131°F.

3.3.4.2 Nonoperating (storage). - The receiver/transmitter tester shall not suffer permanent damage when subjected to the temperature extremes of -80° F and +185° F, and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.3.5 Humidity-nonoperating. - The receiver/transmitter tester shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. - Each conductor shall be electrically continuous as specified on the schematic diagram.

3.5 Performance.

3.5.1 POWER switch S4.

3.5.1.1 OFF. - When 24 Vdc ± 5% is applied to J13-V(+)* and J13-S(Ret) and S4 is in normally closed position, OFF legend of S4 shall be illuminated.

*The information is parenthesis refers to the polarity applied to this terminal. This notation shall be used throughout this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.5.1.2 ON. - When 24 Vdc ±5% is applied to J13-V(+), J13-R(+) and J13-S(Ret) and S4 is in normally open position, ON legend of S4 shall be illuminated and the following conditions exist:

(a) 24 Vdc ±5% is present between J13-W(+) and J13-S(Ret).

(b) 24 Vdc ±5% is present between J4-G(+) and J4-F (Ret).

(c) Continuity shall exist between:

(1) J13-C and J5-1

(2) J13-C and J7-2

(3) J13-T and J4-S

(4) J13-T and J7-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.5.2 OPERATE/STANDBY switch S2. - The legends of S1, S2 and S5 shall not be illuminated when S2 is in normally closed position. With conditions stated in 3.5.1.2 and S2 in normally open position, STANDBY legend of S2 shall be illuminated for 2 minutes ±12 seconds after which OPERATE legend shall be illuminated and STANDBY legend shall be extinguished. (The legend change verifies operation of time delay relay K1.)

3.5.3 NOISE FIGURE READY switch S5. - The legend of S5 shall not be illuminated when S5 is in normally closed position. When S2 OPERATE legend is illuminated and S5 is in normally open position, the NOISE FIGURE READY legend of S5 shall be illuminated, S1 RADIATE legend shall not be illuminated and 0 Vdc is present between J13-R and J4-F.

3.5.4 RADIATE switch S1. - The legend of S1 shall not be illuminated when S1 is in normally closed position or when NOISE FIGURE READY legend is illuminated. RADIATE legend of S1 shall be illuminated and 24 VDC ±5% shall be present between J13-R(+) and J4-F(Ret) under the following conditions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

(a) POWER switch ON legend illuminated as given in 3.5.1.2.

(b) OPERATE legend of S2 illuminated.

(c) NOISE FIGURE READY legend of S5 illuminated.

(d) RADIATE switch S1 in normally open position.

3.5.5 NOISE TUBE LEVEL meter M1. - Noise tube current, indicated by meter M1 shall be variable between 0 mA and 80 mA by operation of NOISE TUBE ADJ control R1 under the following conditions:

(a) ON legend of POWER switch illuminated as stated in 3.5.1.2.

(b) OPERATE legend of S2 illuminated.

(c) NOISE FIGURE READY legend of S5 illuminated.

(d) 115V ±10V, 400 Hz applied between J13-J and -K.

(e) Circuit breaker CB1 closed (white band not visible).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.5.6 Circuit breaker (CB1). - Circuit breaker CB1 shall be closed when reset button is depressed so white band is not exposed. The circuit breaker shall be open when reset button is pulled out to expose white band.

3.5.7 Noise generator V1 and PS1. - The noise generator shall produce a noise ratio of 17.5 ± 5 db at 9.2 ± .05 GHz at the output jack J3 under the following conditions:

(a) As stated in 3.5.5.

(b) Meter M1 indication of 80 mA (set by position of NOISE TUBE ADJ R1).

(c) ATTENUATION (DB) set to 0 by position of NOISE LEVEL ADJ control.

3.5.8 Attenuator AT1. - Attenuator AT1 shall provide a continuously variable attenuation of the noise present at output jack J3. The amount of attenuation shall be controlled by NOISE LEVEL ADJ control and indicated on ATTENUATION (DB) scale ±2% between 0.5 and 60 dB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.5.8 Attenuator AT1. - Attenuator AT1 shall provide a continuously variable attenuation of the noise present at output jack J3. The amount of attenuation shall be controlled by NOISE LEVEL ADJ control and indicated on ATTENUATION (DB) scale ±2% between 0.5 and 60 dB.

3.5.9 AGC ADJ R10. - Voltage between J2-E(+) and J4-K(Ret) shall be 0 to 6 Vdc (minimum), variable by operation of AGC ADJ control R10 with conditions stated in 3.5.1.2 and 15 Vdc ± 0.5 V applied between J13-E(+) and J13-F (Ret).

3.5.10 Amplifier AR1. - Gain of amplifier AR1 shall be not less than 60 db under the following conditions.

(a) As stated in 3.5.1.2.

(b) 15 Vdc ± 0.5V applied between J13-E(+) and J13-F (Ret).

(c) 60 ± MHz applied between J2-D (center contact) and shield.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions. - The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be listed in MIL-STD-109.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.2 First article (initial production) approval. - The requirement for first article approval and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of one receiver/transmitter tester manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. - When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing. - When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product. - Unless otherwise specified by the Contracting Officer, inspection lot size, lot information, and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests. - Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables I and II herein. Examinations and test for Packaging, Packing and Marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS

100% INSPECTION

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
101. Electrical	3.4	4.6.2
102. POWER switch S4	3.5.1	4.6.3.1
103. OPERATE/STANDBY switch S2	3.5.2	4.6.3.2
104. NOISE FIGURE READY switch 5	3.5.3	4.6.3.3
105. RADIATE switch S1	3.5.4	4.6.3.4
106. NOISE TUBE LEVEL meter M1	3.5.5	4.6.3.5
107. Circuit breaker CB1	3.5.6	4.6.3.6
108. Noise generator (V1 and PS1)	3.5.7	4.6.3.7
109. Attenuator AT1	3.5.8	4.6.3.8
110. AGC ADJ R10	3.5.9	4.6.3.9
111. Amplifier AR1	3.5.10	4.6.3.10

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.3.3 Acceptance and rejection. - Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling. - One receiver/transmitter tester out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests in Table I and shall then meet the requirements and tests in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE II.- SPECIAL SAMPLING

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301.	Fabrication	3.1	Applicable dwg. visual
302.	General specification	3.2	MIL-F-13926 visual
303.	Vibration	3.3.1	4.6.1.1
304.	Shock	3.3.2	4.6.1.2
305.	Altitude - operating	3.3.3.1	4.6.1.3
306.	Altitude - nonoperating	3.3.3.2	4.6.1.3
307.	Temperature	3.3.4	4.6.1.4
308.	Humidity - nonoperating	3.3.5	4.6.1.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.4.1 Failure of sample. - Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved (see 4.3.3).

4.5 Inspection equipment. - Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government-furnished inspection equipment. - Where the contract provides for Government-furnished test equipment, supply and maintenace of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.5.2 Contractor-furnished inspection equipment.

4.5.2.1 Contractor design. - The contractor shall design and supply inspection equipment compatible with "Test Methods and Procedures" specified in 4.6 of this specification and with the "Component Inspection" procedures specified in "Examination" and "Test Facilities"

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

requirements of MIL-F-13926. Since tolerance of test equipment is considered normally to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in design of test equipment shall be so selected and controlled as to ensure that the test equipment will indicate reliable acceptability of a product that does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of the test equipment.

4.5.2.2 Test equipment. - In conjunction with 4.5.2.1, the following test equipment shall be used in the performance of the applicable test as specified in 4.6:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

Item Number	Description
1. Standard Measuring Equipment (SME) or Ohmmeter	To measure continuity
2. Power Supply	24 Vdc ±5%, 3 amperes
3. Voltage Measuring Device	Range 0-30 Vdc 0-130 Vac Accuracy of ±3% on dc ±3% on ac Sensitivity 20K Ω/Vdc 5K Ω/Vac
4. Timer (Stop Watch)	To measure 120 seconds ± 5
5. Power Supply	115V ±10V, 400 Hz 300 mA

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6.	Power Supply	15 Vdc ±0.5V at 0.2 amperes
7.	Signal Generator	60 MHz CW
8.	Attenuator	Coax, Variable 0-90 dB
9.	R.F. Millivoltmeter	Capable of greater than 60 dB measurement at 60 MHz, signal level less than 0.5 VRMS
10.	Switch	Single pole, double throw

4.6 Test methods and procedures.

4.6.1 Environmental. - Environmental test shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.1.1 Vibration. - The test shall be performed as specified in Method 514, Procedure IX, Part I, of MIL-STD-810 except that Failure Criteria of 4.9.1.3 does not apply. After vibration, the receiver/transmitter tester shall be tested as given in the sub-paragraphs of 4.6.2 and 4.6.3 for compliance with 3.3.1.

4.6.1.2 Shock. - This test shall be performed as specified in Procedure I of Method 516 of MIL-STD-810 except that shock pulses shall be 11.0 ms and 15 g's. After the shock impulses, the receiver/transmitter tester shall be tested as specified in 4.6.2 and 4.6.3 for compliance with 3.3.2.

4.6.1.3 Altitude - non-operating and operating. - This test shall be performed as specified in Procedure I, Method 500 of MIL-STD-810 except that in Step 2 the altitude shall be limited to 40,000 ft. (5.5 in Hg). Operation of Step 3 shall be the performance tests of 4.6.3.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and non-operating). - This test shall be performed as specified in Procedure I, Method

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

501, of MIL-STD-810. The temperature of Step 2 shall be +185°F. The temperature of Step 4 shall be +130°F. In Step 5 the receiver/transmitter tester shall be tested in accordance with 4.6.2 and 4.6.3.

4.6.1.4.2 Low (operating and non-operating). - This test shall be performed as specified in Procedure I, Method 502 of MIL-STD-810. The temperature of Step 2 shall be -85°F maintained for 24 hours. The temperature of Step 4 shall be +32°F. In Steps 5 and 7, the receiver/transmitter tester shall be tested in accordance with 4.6.2 and 4.6.3.

4.6.1.5 Humidity-nonoperating. - This test shall be performed in accordance with Procedure I, Method 507 of MIL-STD-810 except that in Step 4, the relative humidity shall be maintained at 95%.

4.6.2 Electrical. - Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4 using item 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.3 Performance.

4.6.3.1 POWER switch S4. - Apply 24 Vdc ±5%, item 2, between J13-V(+), J13-R(+) and J13-S(Ret). Verify that OFF or ON legend of POWER switch is illuminated. Depress and release S4 three times. Verify that OFF and ON legends of POWER switch are illuminated alternately with operation of S4. Using item 1 and item 3 for continuity and voltage respectively, verify that the following exists when ON legend of POWER switch is illuminated:

(a) 24 Vdc ±8% between J13-W(+) and J13-S(Ret).

(b) 24 Vdc ±8% between J4-G(+) and J-4-F(Ret).

(c) Continuity between:

(1) J13-C and J5-1

(2) J13-C and J7-2

(3) J13-T and J4-S

(4) J13-T and J7-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.3.2 OPERATE/STANDBY switch S2. - Set up conditions stated in 3.5.1.2 (ON legend of POWER switch illuminated). Operate (depress and release) S2 three times. STANDBY legend of S2 shall be illuminated and extinguished alternately with operation of S2. Allow S2 to remain in normally open position (STANDBY legend extinguished). Operate S2 to illuminate STANDBY legend and simultaneously start timer, item 4. After 2 minutes ±12 seconds, STANDBY legend shall be extinguished and OPERATE legend shall be illuminated.

4.6.3.3 NOISE FIGURE READY switch S5. - Set up conditions stated in 3.5.1.2 and 3.5.3. (ON legend of S4 and OPERATE legend of S2 illuminated.) Depress and release S5 three times. NOISE FIGURE READY legend of S5 shall be illuminated and extinguished alternately with operation of S5. Verify with NOISE FIGURE READY illuminated 0 Vdc is present between J13-R and J4-F (use item 3) and RADIATE legend of S1 cannot be illuminated by operation of S1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.3.4 RADIATE switch S1. - Set up conditions stated in 3.5.1.2 and 3.5.2 (ON legend of S4 and OPERATE legend of S2 illuminated). Operate S5 to illuminate NOISE FIGURE READY. Verify using item 3, that 0 volts are present between J13-R and J4-F and RADIATE legend cannot be illuminated by operation of S1. Operate S5 to extinguish NOISE FIGURE READY legend. Depress and release S1 three times. Verify that RADIATE legend of S1 is illuminated and extinguish alternately with operation of S1. With RADIATE Legend illuminated, verify that 24 Vdc ±8% is present between J13-R(+) and J4-F(Ret) using item 3.

4.6.3.5 NOISE TUBE LEVEL meter M1. - Close circuit breaker CB1. Apply 115 Vac ±10 Vac, 400 Hz, item 5 to J13-J and J13-K(Ret). Set up conditions stated in 3.5.1.2 and 3.5.2 (ON legend of S4 and OPERATE legend of S2 illuminated). Operate S5 to illuminate NOISE FIGURE READY. Rotate NOISE TUBE ADJ control R1 from fully counter-clockwise to clockwise position. Verify that NOISE TUBE LEVEL meter M1 indicates 0 with R1 fully CCW and varies continuously to greater than 80 mA with operation of R1 to its fully clockwise position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.3.6 Circuit breaker CB1. - Close circuit breaker CB1 by depressing reset pushbutton so white band is not exposed. Apply power to J13 and set up conditions as stated in 4.6.3.5. Adjust NOISE TUBE ADJ control R1 to obtain 80 mA indication on meter M1. Open circuit breaker CB1 by pulling out reset pushbutton so white band is exposed. Verify that meter indication drops to 0. Turn off ac power, item 5, reset circuit breaker and turn on ac power. Verify that meter M1 indicates presence of noise tube current and returns to 80 mA after sufficient filament warm-up time.

4.6.3.7 Noise generator (V1 and PS1). - Set up conditions stated in 3.5.5. Use item 2 to provide 24 Vdc and item 5 to provide 115 Vac, 400 Hz. Verify that noise generator is operating by adjusting NOISE TUBE ADJ R1 for an indication of 80 mA on meter M1.

4.6.3.8 Attenuator AT1. - Rotate NOISE LEVEL ADJ control and verify that ATTENUATION (DB) scale is variable over the full range of 0 to 60 dB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.3.9 AGC ADJ R10. - Apply voltages and set up conditions stated in 3.5.1.2 using item 2 to supply 24 Vdc. Apply 15 Vdc ±0.5V using item 6 between J13-E(+) and J13-F (Ret). Rotate AGC ADJ control R10 from fully counterclockwise to fully clockwise and verify, using item 3, voltage between J2-E(+) and J4-K(Ret) varies from 0 to 6 Vdc minimum.

4.6.3.10 Amplifier AR1. - Set up conditions stated in 3.5.1.2 using item 2 for 24 Vdc. Apply 15 Vdc ±0.5V using item 6 between J13-E(+) and J13-F(Ret). Refer to Figure 1 and perform the following steps:

(a) Connect signal generator item 7, attenuator item 8, SPDT switch item 10 and R.F. Meter item 9 as shown in Figure 1.


(b) Set switch to position B.

(c) Set attenuator to obtain a reference level of approximately 0 dB on the meter.

(d) Record attenuator setting.

(e) Set switch to position A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

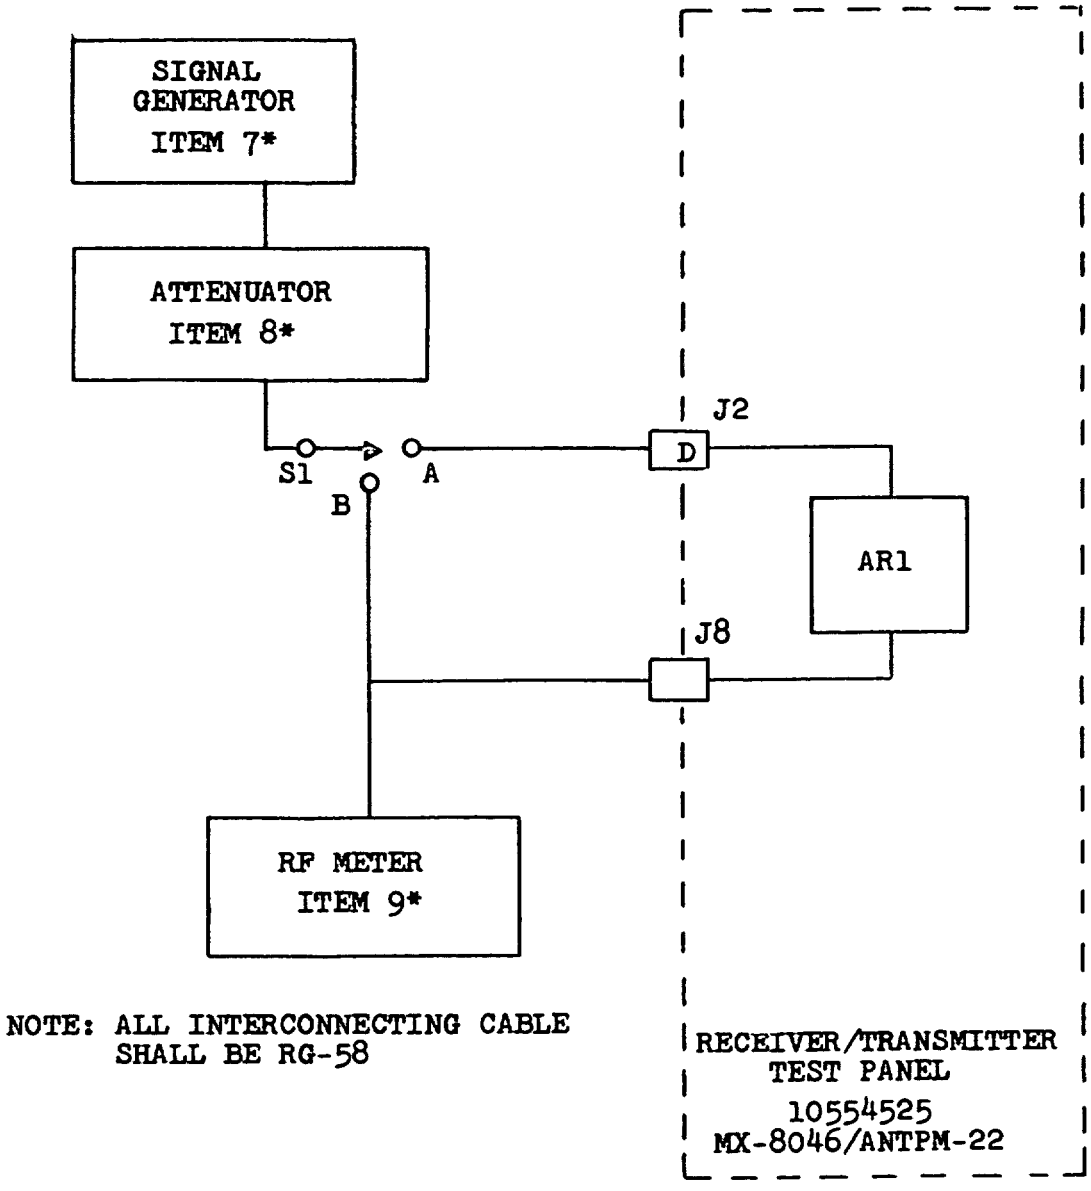

NOTE: ALL INTERCONNECTING CABLE SHALL BE RG-58

*REFER TO 4.6.3.10

FIGURE 1. AMPLIFIER TEST SETUP

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

(f) Adjust attenuator to obtain same reference level as in step (d) above.

(g) Record attenuator setting.

(h) Subtract reading in (g) from (d).

Figure obtained in step (h) shall verify gain of AR1 is not less than 60 dB.

5. PREPARATION FOR DELIVERY

5.1 Packaging. - Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 10554525. The level of protection shall be as specified in the contract.

6. NOTES

6.1 Intended use. - The receiver/transmitter tester is used for testing, aligning and troubleshooting the Receiver/Transmitter, Unit 2 of Radar Set AN/VPS-2 and some of its repairable assemblies and subassemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Applicable packaging data sheet (see 5.1).

(c) Selection of applicable level of preservation packaging and packing.

(d) Level of protection required.

(e) Applicable stock number.

(f) Block of serial numbers to identify each

Custodian:
Army - MU

Preparing Activity:
Army - MU
Project No. 4931-A017

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

[ ] YES [ ] NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.