MILITARY SPECIFICATION

GATE, MULTIPLE, CIRCUITS: 9342754

This specification is approved for use by the US Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers Multiple Gate Circuits assembly used in Radar Receiver R-1475/VPS-2, part of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel; Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-C-46357	Computer, Gun Direction; M18 Manufacturing Processes and Inspection of
MIL-A-55339/17	Adapter, Connector

FSC: 1285

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn. DRSMC-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-454	General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods

2.1.2 Other government documents, drawings, and publications. The following other government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.4)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER (ARDC)

9342754	Muliple Gate Circuits
9342755	Runs List, Wire, Multiple Gate Circuit
9342756	Schematic, Multiple Gate Circuit
10548179	Divider, 4 Way
10548183	Hybrid Junction
10549074	Connector P/N 10549074-2

PACKAGING DATA SHEET

9342754	Packaging of Multiple Gate Circuits

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

(Copies of specifications, standards, drawings, and packaging data sheets required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication. The Mulitple Gate Circuits shall be manufactured in accordance with Drawing 9342754 and drawings pertaining thereto.

3.2 General specifications. Where applicable, the Multiple Gate Circuits shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

Source: https://assist.dla.mil -- Downloaded: 20260-22T20:33Z
Check the source to verify that this is the current version before use.

3.2.1 MIL-F-13926.

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishings
d. Part identification and marking
e. Workmanship
f. Soldering electrical connections

3.2.2 MIL-C-46357.

a. Etched circuit assemblies
b. Wiring
c. Threaded fasteners
d. Marking
e. Finishes

3.3 Environmental service conditions.

3.3.1 Vibration. The Mulitple Gate Circuits shall be mounted on the vibration table in normal service position. The Mulitple Gate Circuits shall meet the requirements of 3.4 and 3.5 after being subject to continuous vibration for 2 hours along each of three mutually perpendicular axes within the frequency range of 10 to 55 hertz (Hz) and a half amplitude excursion of 1/64 inch. The rate of change of frequency at each frequency range shall not exceed 1 Hz per second. Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock. The Mulitple Gate Circuits shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The shock impulses shall have an acceleration of 15 gravity units (g) and a pulse duration of 11 $\pm$ 1 millisecond (ms). The G value of each impulse shall be within $\pm$ 10 percent when measured with a 0.2 to 250 Hz filter and the maximum g shall occur at approximately 5.5 ms.

3.3.3 Altitude.

3.3.3.1 Operating. The Mulitple Gate Circuits shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

3.3.3.2 Nonoperating. The Mulitple Gate Circuits shall meet the requirements of 3.4 and 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 inches Hg).

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:33Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The Mulitple Gate Circuits shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40°F and +155°F.

3.3.4.2 Nonoperating (storage). The Mulitple Gate Circuits shall not suffer permanent damage when subjected to not less than 4 hours at each temperature extreme of -65°F and +160°F, and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (nonoperating). The Mulitple Gate Circuits shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity of 95 ±5 percent for a period of not less than 10 days.

3.4 Electrical.

3.4.1 Continuity. The circuitry shall be in accordance with electrical schematic Drawing 9342756 and wireruns list 9342755. The wiring runs list shall take precedence over the schematic. The symbols referenced in subsequent paragraphs pertain to this schematic and are used herein.

3.5 Performance.

3.5.1 Inputs. Connect the multiple gate (Unit 3A5) with the test facilities as shown in Figure 1. Apply the inputs to the related terminals-

+15.0 ±0.1Vdc to J11-1, Ret. to J11-3.
-15.0 ±0.1Vdc to J11-5, Ret. to J11-3.
20KHZ ±1% pulse repetition frequency, 2.5 ±0.1Vdc amplitude, 2.00 ±0.01 microseconds (us) pulse width at J1.

3.5.2 Outputs.

3.5.2.1 Gate offsets. With range gate input (J1) on unit under test open circuited.

3.5.2.1.1 Sum gate. Adjust R39 on the unit under test to produce a voltage at Terminal 4 of T2 that is identical within (±10mV) to the voltage at Terminal 5 of T2 but opposite in polarity.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the currentversion before use.

3.5.2.1.2 Late gate. Adjust R57 on the unit under test to produce a voltage at Terminal 4 of T3 that is identical within (±10mV) to the voltage at Terminal 5 of T3 but opposite in polarity.

3.5.2.1.3 Early gate. Adjust R70 on the unit under test to produce a voltage at Terminal 4 of T4 that is identical within (±10mV) to the voltage at Terminal 5 of T4 but opposite in polarity.

3.5.2.2 Early/late gate tuning. With the multiple gate connected with the test set up as shown in Figure 2, a 60 ±1% MHZ signal and a monitored 2.8V P-P signal per gate applied to J5, J7, and J10 of the unit under test, the total BURST width shall be 750 ± 50 nanoseconds with the notch at the 90% point not more than 80 nanoseconds. The peak to peak output, as monitored at J3 of the Hybrid Junction, Item 7, shall be not less that 1.5V. There shall be no dead time between gates at room ambient. The base line between the early/late gate shall not exceed 0.02 microseconds over temperature range without readjustment from ambient setting.

3.5.2.3 Gate burst.

3.5.2.3.1 Sum gate. With the multiple gate connected with the test set up as shown in Figure 1, a 60 ±1% MHZ signal and a monitored 2.8V P-P signal per gate applied to J5, J7, and J10 of the unit under test, the gated burst at J4, SUM GATE, shall be:

Peak to Peak Amplitude	2.2V minimum
Width	.75 ± .05us
Rise Time	Less than .05us
Fall Time	Less than .05us
Tilt	Less than or equal to 0.1V
Isolation	$\frac{E_{on}}{E_{off}}$ Greater than 79.4 ratio

3.5.2.3.2 Late gate. The gated burst output at J6, Late Gate, shall be per 3.5.2.3.1 except the pulse width shall be 370 ± 25 nanoseconds and the tilt not more than 0.05V.

3.5.2.3.3 Early gate. The gated burst output at J8, Early Gate, shall be per 3.5.2.3.2.

3.6 First article inspection. This specification makes provisions for first article inspection. Requirements for the submission of First Article Samples by the contractor shall be as specified in the contract.

3.7 Workmanship. The requirements of MIL-STD-454 and other applicable specifications shall apply.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:33Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be listed in MIL-STD-109.

4.2 First article (initial production) submission. The requirement for first article approval and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three Multiple Gate Circuits manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product. Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the technical data package (TDP). In the absence of SQAP's, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in 4.3.2.3 and 4.4 herein. Examination and test for packaging and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in 4.3.2.3 and 4.4 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.3.2.3 Functional tests. The requirements and tests in Table I shall be inspected on a 100 percent basis. All examinations and tests shall be conducted at the standard ambient temperature (60°F and 90°F).

TABLE I. Classification of defects
(100 percent inspection)

Characteristic	Requirements	Test Procedures
Critical: None		
Major:		
101. Electrical	3.4	4.6.2
102. Performance	3.5	4.6.3
Minor: None		

4.3.3 Rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling. One Multiple Gate Circuit shall be selected at random by a Government representative as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table II. Three Mulitple Gate Circuits shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control samples shall meet the requirements and tests in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

TABLE II. Special sampling

Control test	Requirement	Test procedures
301. Fabrication	3.1	Applicable drawings-Visual
302. General specifications	3.2	MIL-F-13926 & MIL-C-46357-Visual

TABLE III. Special sampling, environmental

Characteristic	Requirement	Test procedure
303. Vibration	3.3.1	4.6.1.1
304. Shock	3.3.2	4.6.1.2
305. Altitude	3.3.3	4.6.1.3
306. Temperature	3.3.4	4.6.1.4
307. Humidity (nonoperating)	3.3.5	4.6.1.5

4.4.1 Failure of sample. Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved (see 4.3.3).

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.5.2 Contractor-furnished inspection equipment.

4.5.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.5.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of inspection" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Test equipment. In conjunction with 4.5.2.2, the standard test equipment listed in Table IV shall be utilized in performing the applicable test of 4.6.

TABLE IV. Test equipment list

Item number		Description
1.	Phase shifter	Model PS-3-60, Merrimac or equal.
2.	Signal generator	60 MHz with variable output from 100 mV to 1.5 V. (HP 606 or equal).
3.	Pulse generator	PRF: 20 kHz. Amplitude: 2.5 V. Pulse width: 2.0 us. Synchronizing output capable of being advanced from 0 to 2.0 us ahead of output pulse. (Data Pulse 101 or equal).
4.	Oscilloscope	Bandwidth: 0 to 60 MHz. Sensitivity: 5 mV/cm to 0.5 V/cm. Time base: 0.1 us to 1.0 us/cm with external synchronization. (Tektronix 454 or equal).
5.	Power supply	+15.0 Vdc and -15.0 Vdc power source 200 mA. Line/load regulation less than 0.1%. Ripple: less than 1 mV. (Trygon DL 40-1, Dual or equal).

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:33Z
Check the source to verify that this is the current version before use.

TABLE IV. Cont'd

Item number		Description
6.	Test harness	See Figures 1 and 2. With exception of wires connecting power supplies and unit under test, all cables shall be radio frequency type RG-58/U with connectors compatible with mating connectors on test equipment and unit under test (MIL-A-55339/17).
7.	Hybrid junction	P/N 10548183 (1)
8.	Switch	DPST, Cutler hammer P/N 8370R8 or equal
9.	Divider 4 way	10548179
10.	Digital voltmeter	Fluke 8600 or 8100A or equal
11.	Connector (P1)	10549074-2
12.	Connector (TPS-"T")	Automatic metals G4768-000-000 or equal
13.	Connector (BNC-"T")	M55339/17-00174(2)
14.	Termination, 50 OHM	Texscan TF 50 or equal(4)
15.	Adapter	BNC female to TPS male(2)

4.6 Methods of inspection.

4.6.1 Environmental. Environmental tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

4.6.1.1 Vibration. The test shall be performed as specified in Method 514, Procedure VIII of MIL-STD-810 as modified by 3.3.1 herein. After vibration, the Multiple Gate Circuits shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.1.

4.6.1.2 Shock. This test shall be performed as specified in Procedure I, Method 516 of MIL-STD-810 except that shock pulses shall be 11.0 ms and 15 g. After the shock impulses, the Multiple Gate Circuit shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.6.1.3 Altitude (nonoperating and operating). This test shall be performed as specified in Procedure I, Method 500 of MIL-STD-810 except that in Step 2 the altitude shall be limited to 40,000 feet (5.5 in Hg). Operation of Step 3 shall be the performance tests specified in 4.6.3.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 501 of MIL-STD-810. The temperature of Step 2 shall be +160°F. The temperature of Step 3 shall be maintained for not less than 4 hours. The temperature of Step 4 shall be +155°F. In Step 5, the temperature shall be maintained for 4 hours and the Multiple Gate Circuit shall be tested in accordance with 4.6.2 and 4.6.3 during this time.

4.6.1.4.2 Low (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 502 of MIL-STD-810. The temperature of Step 2 shall be -65°F maintained for not less than 4 hours. The temperature of Step 4 shall be -40°F. In Steps 5 and 7, the Multiple Gate Circuits shall be tested in accordance with 4.6.2 and 4.6.3.

4.6.1.5 Humidity (nonoperating). This test shall be performed in accordance with Procedure II, Method 507 of MIL-STD-810. The Multiple Gate Circuit shall be tested in accordance with 4.6.3.

4.6.2 Electrical tests.

4.6.2.1 Continuity. A continuity test shall be performed to verify conformance of 3.4.1.

4.6.3 Performance tests.

4.6.3.1 Conditions of operation. The test equipment shall be setup as per Figure 1. With switch S1, Item 8, Off, adjust the +15V Power Supply, Item 5, for +15.0 ±0.1 VDC and the -15V Power Supply, Item 5, for -15.0 ±0.1 VDC using the digital volmeter, Item 10. Remove the RF Generator Cable.

Turn S1 of the test setup to ON and recheck the ±15V settings. Connect a cable from the TPS "T" on the input to J1 of the unit under test to the oscilloscope, Item 4, input. Disconnect the 50 Ohm termination, Item 14 from the oscilloscope, and adjust the pulse generator, Item 3, for the following PRF 20 ±1% KHZ, +2.5 ±0.1V amplitude and a width of 2.0 ±0.01 microseconds.

Disconnect the oscilloscope lead from the TPS "T" at J1.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:33Z
Check the source to verify that this is the current version before use.

4.6.3.2 Gate offset. Disconnect lead from pulse generator, Item 3 to J1 of the unit under test.

4.6.3.2.1 Sum gate. Using the digital voltmeter, Item 10, measure the voltage present on Terminal 5 of T2 of the Unit under test. Adjust R39 to produce an opposite polarity identical within (±10mV) voltage on Terminal 4 of T2.

4.6.3.2.2 Late gate. Using the digital voltmeter, Item 10, measure the voltage present on Terminal 5 of T3 in unit under test. Adjust R57 to produce an opposite polarity identical within (±10mV) voltage on Terminal 4 of T3.

4.6.3.2.3 Early gate. Using the digital voltmeter present on Terminal 5 of T4 in unit under test, adjust R70 to produce an opposite polarity identical within (±10mV) voltage on Terminal 4 of T4.

4.6.3.3 Early/late gate adjustment.

4.6.3.3.1 Connect the unit under test to the test set up per Figure 2, except terminate J3 and J4 of the 4 way divider, Item 9, with 50 OHM terminations, Item 14, and connect J5 of the 4 way divider to the BNC "T" on channel 1 of the oscilloscope. Adjust RF generator to 60 ± 1% MHZ, and for 2.8V P-P on channels 1 and 2 of the oscilloscope.

4.6.3.3.2 Connect the unit under test to the test set up per Figure 2. Turn switch S1 to on. Adjust the phase shifter, Item 1, for minimum distrubance thru gate and time and adjust RF generator to maintain 2.8V P-P. The total burst as seen on channel 1 of the oscilloscope, Item 4, shall be as specified in paragraph 3.5.2.2. See Figure 3. If required adjust U5 on unit under test to meet specifications. Turn switch S1 to off.

4.6.3.4 Gate burst.

4.6.3.4.1 Sum gate. Connect the unit under test to the test set up per Figure 1. Recheck four way splitter Item 9, J2 setting. Turn switch S1 to ON and recheck the + 15V setting. Connect the oscilloscope lead to J4 (Sum Gate output). The 60 MHZ gated burst shall be per 3.5.2.3.1. See Figure 4.

4.6.3.4.2 Late gate. Connect the oscilloscope lead to J6 (Late Gate output) on the unit under test. Connect the 50 Ohm termination to J4. The 60 MHZ gated burst shall be per 3.5.2.3.2. See Figure 4.

4.6.3.4.3 Early gate. Connect the oscilloscope lead to J8 (Early Gate output) on the unit under test. Connect the 50 Ohm termination to J6. The 60 MHZ gated burst shall be per 3.5.2.3.3. See Figure 4. Turn switch S1 to OFF.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

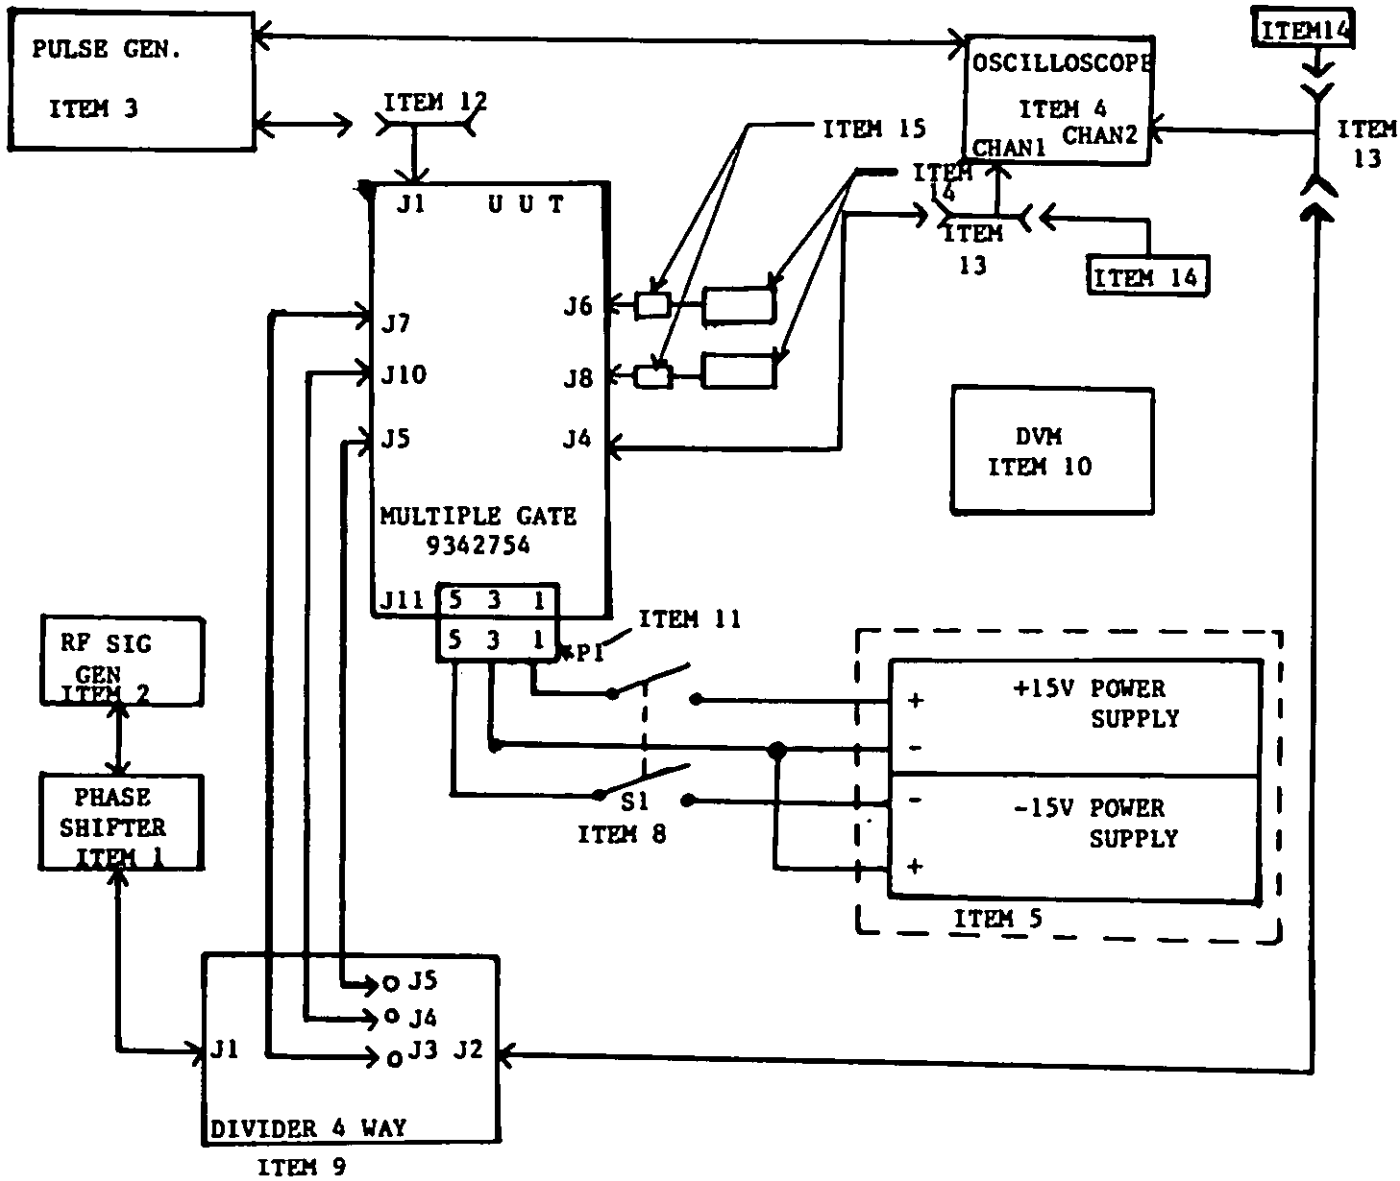


FIGURE 1. Multiple gate circuit test setup

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

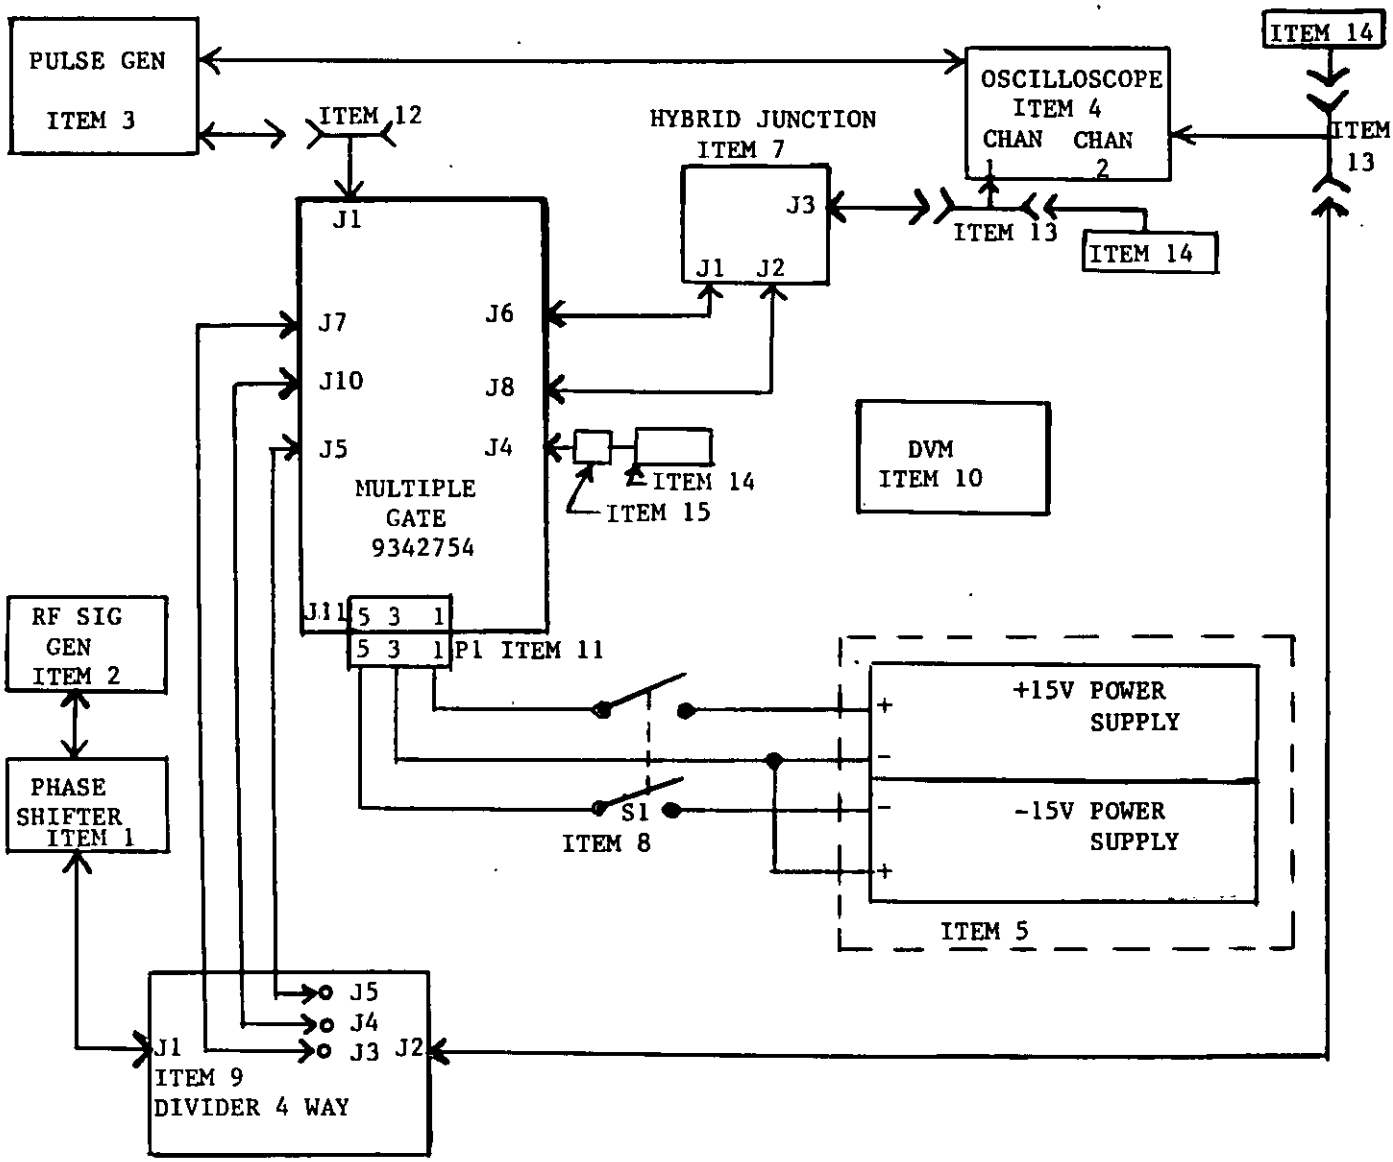


FIGURE 2. Multiple gate circuit test setup

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:33Z
Check the source to verify that this is the currentversion before use.

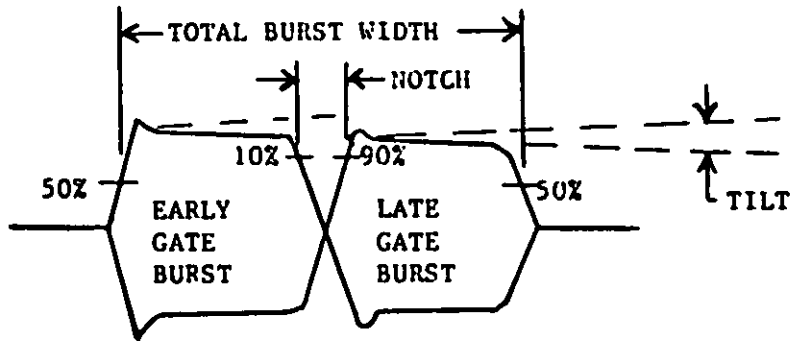


FIGURE 3. Gate outputs

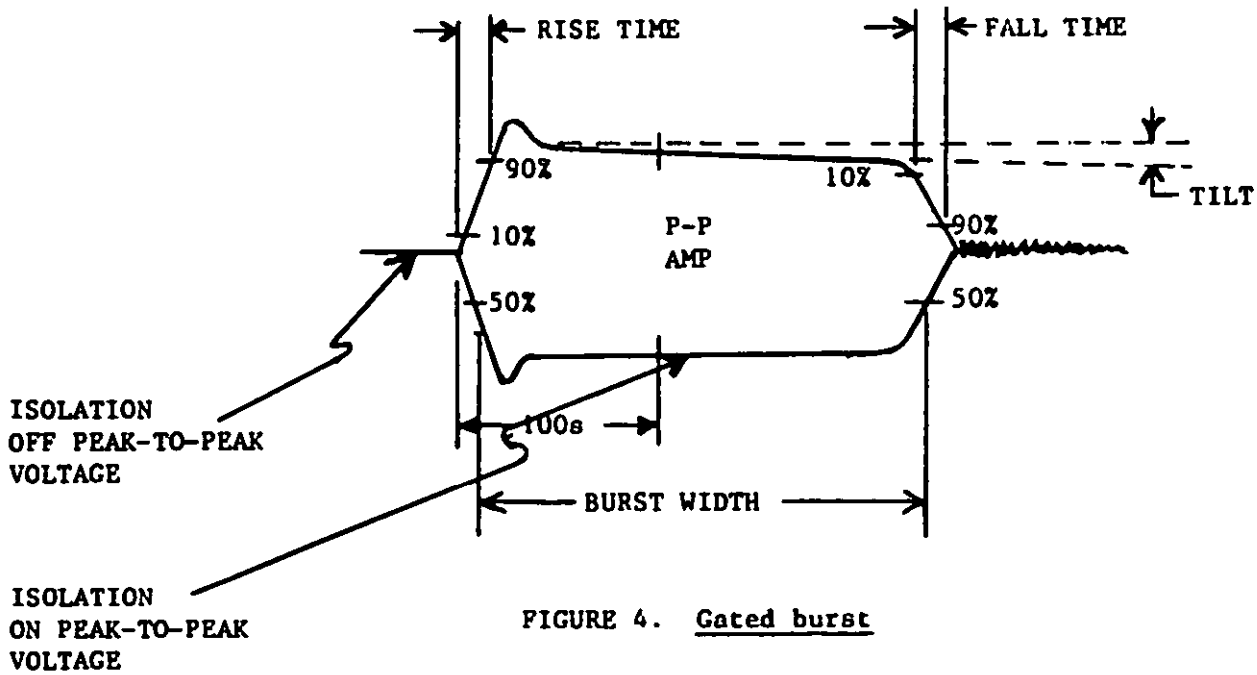


FIGURE 4. Gated burst

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging, packing, and marking. Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 9342754. The level of protection will be as specified in the procurement document.

6. NOTES

6.1 Intended use. The Multiple Gate Circuits assembly is used to provide gated burst of local oscillator signal which is used for summing and providing early and late gating of target video to aid in range finding in Radar Receiver R-1475/VPS-2 part of Radar Set AN/VPS-2.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Applicable packaging data sheet number (see 5.1).

c. Selection of applicable level of preservation packaging and packing.

d. Level of protection required.

e. Applicable stock number.

f. Requirement for first article submission.

6.3 Submission of designs for approval. Contractor designs shall be approved by the Government prior to fabricating or procuring of the equipment. Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract. Submit designs as required to: Commander, US Army Armament Research and Development Center, ATTN: DRSMC-QAF-I(D), Dover, NJ 07801.

When the contractor submits inspection equipment designs to the Government for approval, he shall give the following information in his letter of transmittal:

a. The contract number.

b. The contract item (name, model number, etc.).

c. The designs remaining to be submitted and the expected date of transmittal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Center (ARDC) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, ARRADCOM, or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDC.

6.5 Changes to previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project (1285-A561)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-G-50678B	GATE, MULTIPLE, CIRCUITS: 9342754

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:33Z
Check the source to verify that this is the current version before use.