INCH-POUND

MIL-D-70704B (AR)
3 July 1992
SUPERSEDING
MIL-D-70704A (AR)
27 January 1988

MILITARY SPECIFICATION

DISTRIBUTION BOX: 9397370

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements and tests for the distribution box, a part of Radar Set AN/VPS-2A (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1285
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-109	-	Quality Assurance Terms and Definitions
MIL-STD-810	-	Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

9397370	-	Distribution Box
9397547	-	Schematic, Distribution Box
12950877	-	Requirements for Soldered Electrical and Electronic Assemblies

SPECIAL PACKAGING INSTRUCTION

PS 9397370	-	Packaging of Distribution Box

(Copies of drawings, publications and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 9397370, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the distribution box shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.

b. Inorganic protective surface finishings.

c. Part identification and marking.

d. Workmanship.

3.3 Environmental service conditions.

3.3.1 Vibration. The distribution box shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds ± 10%.

3.3.2 Shock. The distribution box shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, duration 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The distribution box shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.3.3.2 Nonoperating. The distribution box shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The distribution box shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40°F and +155°F.

3.3.4.2 Nonoperating (storage). The distribution box shall not suffer permanent damage when subjected to the constant temperature extremes of -65°F for a period of 24 hours and +160°F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (nonoperating). The distribution box shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram 9397547 of the distribution box.

3.5 Performance.

3.5.1 DC input voltages isolation. With the Distribution Box Mode switch (S1) set to NORMAL and the Maintenance switch (S4) set to ON, the ratio of forward and reverse bias requirements between pins J3-c and J3-V, and J3-p and J3-V shall be 200 or greater.

3.5.2 Normal mode. When +24.0 ± 0.3 Vdc is applied to connector pins J3-p, 24 V RETURN on pin J3-t, and Mode switch (S1) set to NORMAL and the Maintenance switch (S4) set to OFF, the following voltage will be present at the prescribed connector pins of the distribution box:

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

MEASUREMENT		
+24 ± 0.3 Vdc (+)	24 V RETURN (-)	FUNCTION
J4-n	J4-a	Traverse Brake Control
J5-n	J5-a	Elevation Brake Control
J3-H	J5-a	Traverse Servo Control
J3-V	J5-a	Elevation Servo Control

NO VOLTAGE	REFERENCE	FUNCTION
J3-d	J5-a	Stow Right
J3-U	J5-a	Stow Up

There shall be no continuity between connector pins J3-G (NORM/STOW SELECT) and J3-t of the distribution box.

3.5.3 Maintenance mode. When +24.0 ± 0.3 Vdc is applied to connector pin J3-c, 24 V RETURN to pin J3-t, and the Mode switch (S1) is set to NORMAL, maintenance switch (S4) is set to ON, the following voltage will be present at the prescribed connector pins of the distribution box:

MEASUREMENT		
+24 ± 0.3 Vdc (+)	24 V RETURN (-)	FUNCTION
J4-n	J4-a	Traverse Brake Control
J5-n	J5-a	Elevation Brake Control
J3-H	J5-a	Traverse Servo Control
J3-V	J5-a	Elevation Servo Control

NO VOLTAGE	REFERENCE	FUNCTION
J3-d	J5-a	Stow Right
J3-U	J5-a	Stow Up

3.5.4 Stow mode. When +24.0 ± 0.3 Vdc is applied to connector pin J3-c, 24 V RETURN to pin J3-t, and the Mode switch (S1) set to STOW, Maintenance switch (S4) set to ON, the following voltage will be present at the prescribed connector pins of the distribution box for the specified switch positions:

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

SWITCH	POSITION	+24 ± 0.3 Vdc	24 V RETURN (-)
TRAVERSE STOW (S2)	RIGHT	J3-H	J3-G
TRAVERSE STOW (S2)	RIGHT	J3-H	J3-d
TRAVERSE STOW (S2)	LEFT	J3-H	J3-G
ELEVATION STOW (S3)	UP	J3-V	J3-G
ELEVATION STOW (S3)	UP	J3-V	J3-U
ELEVATION STOW (S3)	DOWN	J3-V	J3-G

SWITCH	POSITION	NO VOLTAGE	REFERENCE
TRAVERSE STOW (S2)	LEFT	J3-H	J3-d
ELEVATION STOW (S3)	DOWN	J3-V	J3-U

3.6 First article. When specified in the contract or purchase order, sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the requirements of Note 2 of Drawing 12950877.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The inspections set forth in this specification shall become part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+60°F to +90°F (+16°C to +32°C)
b.	Relative humidity	90% RH max.
c.	Pressure	28 to 32 inches of Hg (700 to 815 mmHg)

4.3 First article inspection.

4.3.1 Sample. The contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the assemblies, components and test specimens listed below in the quantities indicated.

Name	Drawing	Quantity
Distribution Box	9397370	3

4.3.2 Inspections to be performed. As determined by the Government, the first article assemblies, components and test specimens may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.3.3 Rejection. If any assembly, component, or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of any assembly, component or test specimen to comply with any of the requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies.

a. The contractor's quality program or detailed inspection plan shall provide assurance of compliance of all characteristics with the applicable drawings and specifications utilizing as a minimum the conformance criteria specified in this document and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

b. Alternative inspection procedures, methods or equipment, such as statistical process control, tool control, other types of sampling procedures, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the procuring contracting officer for evaluation and approval by the Government. When required, the contractor shall demonstrate that the effectiveness of the proposed alternative(s) is equal to

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the currentversion before use.

or better than the specified quality assurance provisions herein. In cases of dispute as to whether the contractor's proposed alternative(s) provide equal assurance, the provisions of this specification shall apply. All approved alternative inspection provisions shall be specifically incorporated into the contractor's quality program plan or detailed inspection system, as applicable.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table I shall be performed on a 100% basis.

TABLE I. Functional tests (100 percent inspection).

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:	None	N/A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

4.5 Special sampling. One distribution box out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table I and shall then meet the tests in Table II. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE II. Special sampling.

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity	3.3.5	4.7.1.5
Minor:	None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table III (Test equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE III. Test equipment list.

ITEM NUMBER		DESCRIPTION
1.	Power supply	+24.0 ± 0.3 Vdc, 0.500 milliamps
2.	Digital voltmeter (DVM)	Range: 0-30 Vdc. Accuracy: ± 0.1% of input ± 1 Digit of range. Input impedance: 10 megohms.
3.	Ohmmeter (VOM)	Triplett Model 630 PL or equivalent.
4.	Adapter cable (3 each)	Banana plug to #16 socket contact, MS3192-16A.
5.	Adapter cable (2 each)	Banana plug to #20 PIN contact, MS3192-20A.
6.	Adapter cable (2 each)	Banana plug to #20 socket contact, MS3192-20A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The distribution box shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the distribution box shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the distribution box shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and nonoperating). This test shall be performed as specified in Procedures II and III, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and nonoperating). This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and nonoperating). This test shall be performed as specified in Procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (nonoperating). This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

4.7.3 Performance. The selected distribution box shall be tested as follows:

4.7.3.1 DC input voltage isolation. Set the Mode switch (S1) to NORMAL and Maintenance switch (S4) to ON. Connect the positive lead of the ohmmeter (item 3, Table III) to pin J3-p and the negative lead to pin J3-V. Set the ohmmeter to the X 100 K scale. Note the ohmmeter reading. Connect the positive lead to pin J3-c and note the ohmmeter reading. Reverse the meter leads, positive lead on pin J3-V and negative lead on pin J3-c. The ohmmeter shall have a reading 200 times greater than the first reading (front to back ratio > 200). Connect the negative lead to pin J3-p. The ohmmeter shall have a reading 200 times greater than the first reading.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

4.7.3.2 Normal mode. Adjust the power supply (item 1, Table III) for +24.0 ± 0.3 Vdc and connect the positive (+) terminal to J3-p, negative (-) terminal to J3-t (refer to Figure 1). Set the Mode switch (S1) to "Normal" and the Maintenance switch (S4) to OFF. Connect the DVM (item 2, Table III) to the following points and measure the indicated voltage:

DVM Positive (+)	DVM Negative (-)	Voltage	Function
J4-n	J4-a	+24 V ± 0.3 Vdc	Traverse Brake Control
J5-n	J5-a	+24 V ± 0.3 Vdc	Elevation Brake Control
J3-H	J5-a	+24 V ± 0.3 Vdc	Traverse Servo Control
J3-V	J5-a	+24 V ± 0.3 Vdc	Elevation Servo Control
J3-d	J5-a	0 V	Stow Right
J3-U	J5-a	0 V	Stow Up

Using the VOM, measure for no continuity between pins J3-G and J3-t of the distribution box.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

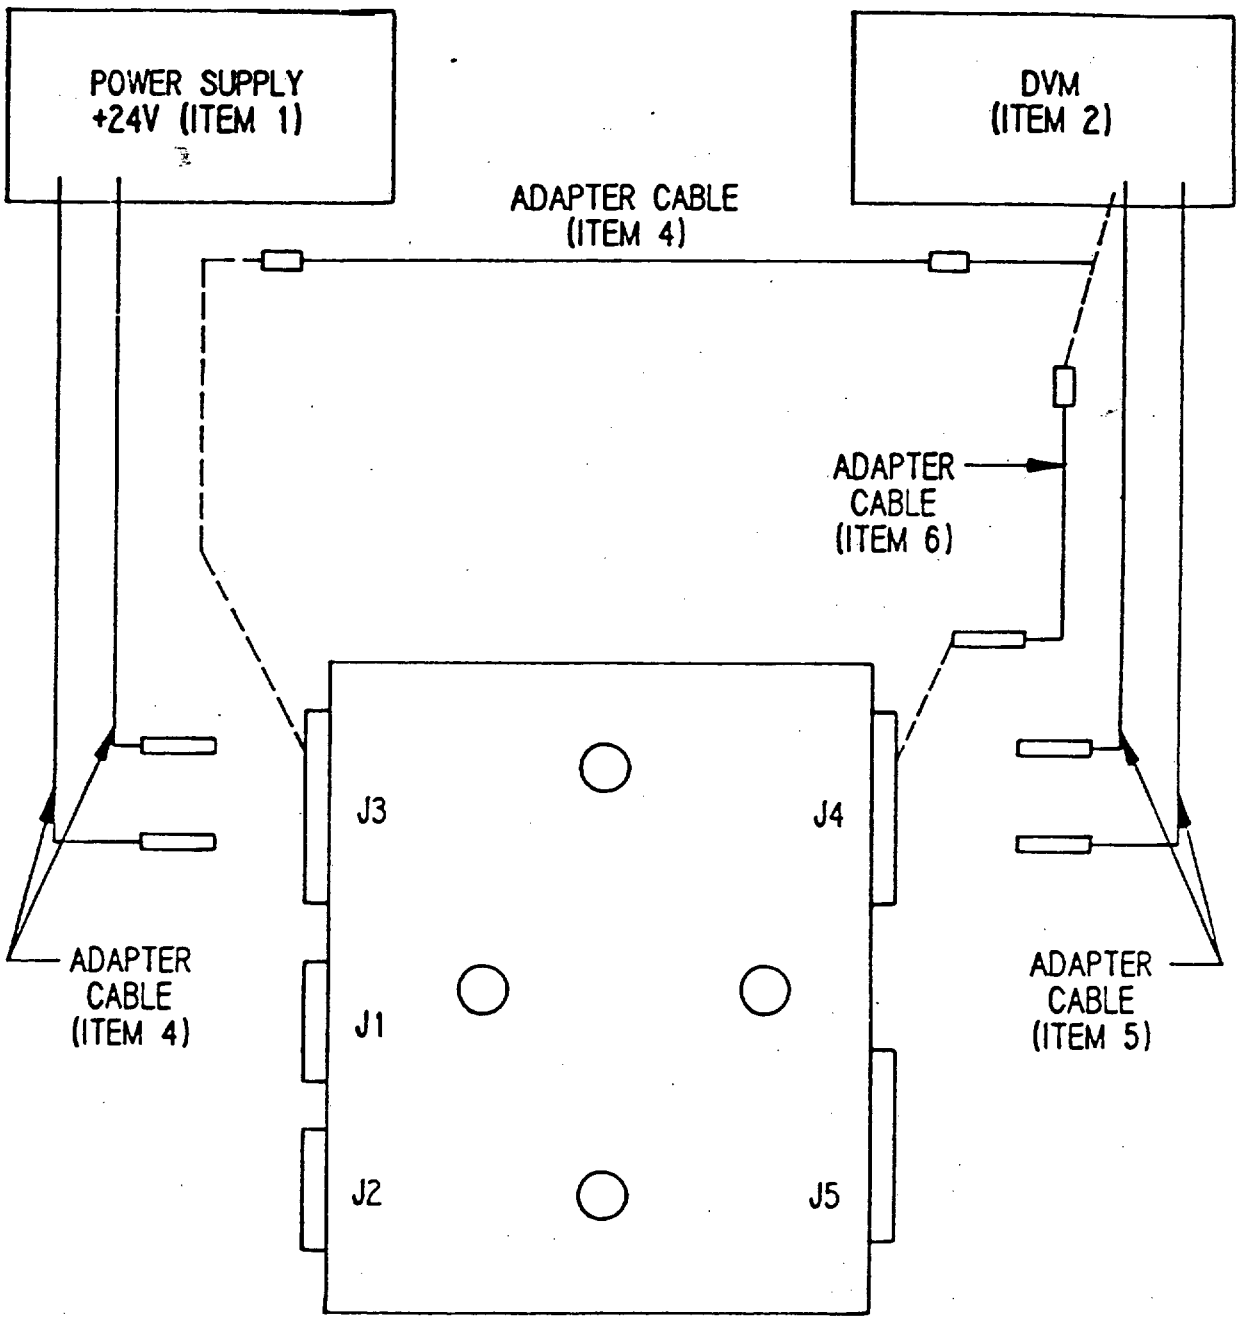


FIGURE 1. Distribution box test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

4.7.3.3 Maintenance mode. Connect the power supply positive (+) terminal to J3-c and negative (-) terminal to J3-t. Set the Maintenance switch (S4) to ON. Connect the DVM to the following points and measure the indicated voltage:

Positive (+)	Negative (-)	Voltage	Function
J4-n	J4-a	+24 ± 0.3 Vdc	Traverse Brake Control
J5-n	J5-a	+24 ± 0.3 Vdc	Elevation Brake Control
J3-H	J5-a	+24 ± 0.3 Vdc	Traverse Servo Control
J3-V	J5-a	+24 ± 0.3 Vdc	Elevation Servo Control
J3-d	J5-a	0 Vdc	Stow Right
J3-U	J5-a	0 Vdc	Stow Up

4.7.3.4 Stow mode. With the power supply connected as in 4.7.3.3 and adjusted for +24 ± 0.3 Vdc, set Mode switch (S1) to STOW. Connect the DVM to the following points and measure the indicated voltage only when the indicated switch is depressed.

(NOTE: Traverse Stow and Elevation Stow switches (S2 and S3) are spring loaded center-off type.)

DVM Positive (+)	DVM Negative (-)	Switch	Position	Voltage
J3-H	J3-d	Traverse Stow	Right	+24 ± 0.3 Vdc
J3-H	J3-d	Traverse Stow	Left	0 Vdc
J3-H	J3-G	Traverse Stow	Right	+24 ± 0.3 Vdc
J3-H	J3-G	Traverse Stow	Left	+24 ± 0.3 Vdc

DVM Positive (+)	DVM Negative (-)	Switch	Position	Voltage
J3-V	J3-U	Elevation Stow	Up	+24 ± 0.3 Vdc
J3-V	J3-U	Elevation Stow	Down	0 Vdc
J3-V	J3-G	Elevation Stow	Up	+24 ± 0.3 Vdc
J3-V	J3-G	Elevation Stow	Down	+24 ± 0.3 Vdc

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of Note 2 of drawing 12950877 as specified in paragraph 3.7.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Special Packaging Instruction 9397370. The level of protection shall be as specified in the procurement documents.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The distribution box provides a point to interface the Power Supply PP-4812/VPS-2A, Antenna AS-2049A/VPS-2A and Fire Control Processor into the antenna servo loop configuration. Motor and control voltages from the power supply are routed through the distribution box to the traverse and elevation drive assemblies of the antenna. Feedback information to the power supply and positioning information to the fire control processor from the antenna are also routed through the distribution box. In addition, the distribution box provides four switches which are used to position the antenna during maintenance and stow operations.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Applicable stock number.

c. First article sample requirements.

d. Packaging requirements, if other than specified in Section 5.

e. Serialization requirements, if applicable.

f. Certification of conformance for each lot of shipment of product.

g. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army ARDEC, Attn: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (key word) listing.

Antenna Assembly AS-2049A/VPS-2A
Fire Control Processor
Fire Control System
Power Supply PP-4812/VPS-2A
Vulcan Air Defense System (VADS)
Radar Set AN/VPS-2A

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A753)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-D-70704B(AR)	03 JULY 1992

3. DOCUMENT TITLE
DISTRIBUTION BOX: 9397370

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial 201-724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMACA-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.