INCH-POUND
MIL-L-70848 (AR)
18 June 1991

MILITARY SPECIFICATION

LASER TUBE/ PRINTED WIRING BOARD ASSEMBLY, 152MM MAIN GUN AND SHILLELAGH MISSILE, SPECIFICATION FOR

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for manufacture, inspection, packaging and acceptance of the Laser Tube/Printed Wiring Board Assembly (PWBA), 152mm, part number 11749645.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1265

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel Manufacture and Inspection of, General Specification for
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-W-63150 - Weapons and Support Materiel, Standard Quality Assurance Provisions for

STANDARDS

MILITARY

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-454 - Standard General Requirements for Electronic Equipment
MIL-STD-810 - Environmental Test Methods
MIL-STD-1686 - Electrostatic Discharge Control Program for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding electrically initiated explosive devices)
MIL-STD-1695 - Environments, Working, Minimum Standards for
MIL-STD-2000 - Standard Requirements for Soldered Electrical and Electronic Assemblies
MIL-STD-45662- Calibration System's Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

HANDBOOK

MILITARY

DoD-HBK-263 - Electrostatic Discharge Control Handbook for Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding electrically initiated explosive devices) METRIC

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER.

PRODUCT DRAWINGS (CAGE CODE 19200)

11749190	-	Printed Wiring Board Assy, 152mm
PL11749190	-	Printed Wiring Board Assy, 152mm
11749309	-	Schematic Diagram, 152mm WFS Transmitter
11749048	-	Laser Tube Assy
11749205	-	Schematic Diagram, Laser
11749645	-	Laser Tube/PWB Assy, 152mm

INSPECTION EQUIPMENT (CAGE CODE 19200)

11748854	-	Detector Module, Si-PN
11749020	-	Printed Wiring Board Assy, Helmet (MWLD)

PACKAGING DATA SHEET (CAGE CODE 19200)

SPI-P11749645	-	Laser Tube/PWB Assy 152mm

(Copies of other Government documents, drawings and publications required by the contractor in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the currentversion before use.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item description. This assembly includes a printed wiring board and two laser tubes. The printed wiring board contains the custom laser driver integrated circuit (IC) chip, a custom semiconductor controlled rectifier (SCR) driver chip, switch transistors, modulator transformer, temperature compensation network components (RT1 and RT 2, and R3-R7) and current sense resistors (R8 and R9).

The board receives load and fire pulses from remotely located CMOS circuitry. The load pulses turn on the proper switch transistor which is then turned off as the result of a comparison of the voltage drop across the current sense resistor with the internal reference within the laser driver chip.

At turnoff the stored energy in the transformer is transferred to the energy storage capacitor located in the laser tube assembly.

The subsequent fire pulse is fed to the gate of the SCR also located in the laser tube assembly. This causes the energy storage capacitor to discharge through the laser diode generating an optical pulse of controlled energy by virtue of the control of energy storage in the transformer provided by the current limit comparison described above.

The printed wiring board controls the two laser tube assemblies, one of which represents the Shillelagh missile while the second simulates the 152mm main gun. There is a single energy storage capacitor associated with the shillelagh laser diode assembly which is shared by the separate 152mm main gun laser diode assembly.

The decision as to which of the two laser fires is controlled by which of two possible fire signals is fed to the board. One fire signal feeds the gate of the SCR in the shillelagh simulator while the second feeds the gate of the SCR in the 152mm simulator.

The Shillelagh Missile and 152mm Main Gun are configured with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

152mm printed wiring board assembly (PWBA) 11749190 per Table I.

TABLE I. Laser Tube/PWBA Configurations.

System	PWBA	Laser Tube
152mm Main Gun	11749190	11749048-10
152mm Shillelagh Missile	11749190	11749048-13

3.1.1 Matched assemblies. The laser tubes and the 152mm PWBAs are matched in the above configuration (see Table I) by selecting R8 and R9 per Table II.

TABLE II. Resistor Selection.

System	R8 (ohms)	R9 (ohms)	Irradiance Energy	Maximum Output Energy
152mm Main Gun	2.21 - 8.25	0.511- 2.00	Figure 1	5.2 ergs
152mm Shillelagh Missile	2.21- 8.25	0.511- 2.00	Figure 2	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

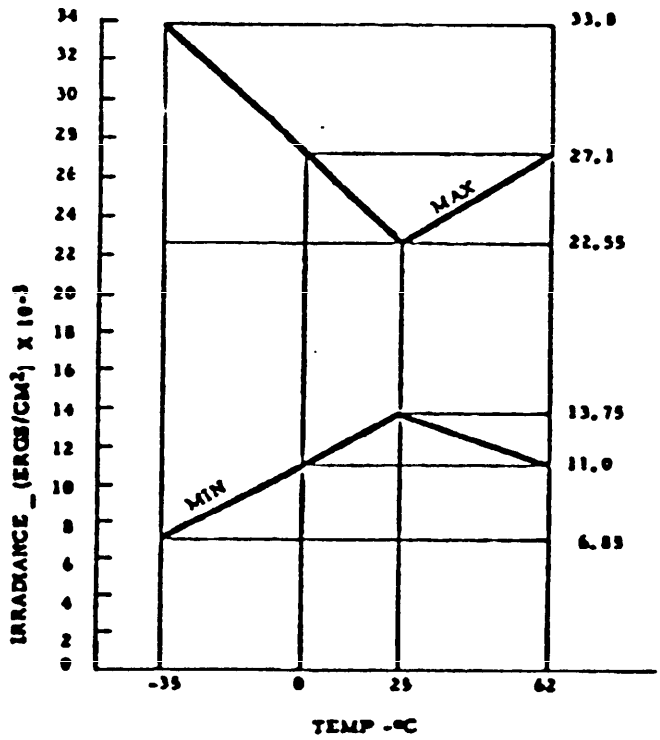


FIGURE 1. 50 Meter Beam Center Irradiance (152mm Main Gun).

3.2 First article. When specified (see 6.4), a sample shall be subjected to first article inspection in accordance with 4.4.

3.3 Environmental stress screen (ESS). All assemblies shall be subjected to an environmental stress screen prior to conformal coating consisting of temperature cycling and soaking between the temperatures -35°C and +62.8°C. After exposure to ESS, the characteristics of 3.4 shall not be degraded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

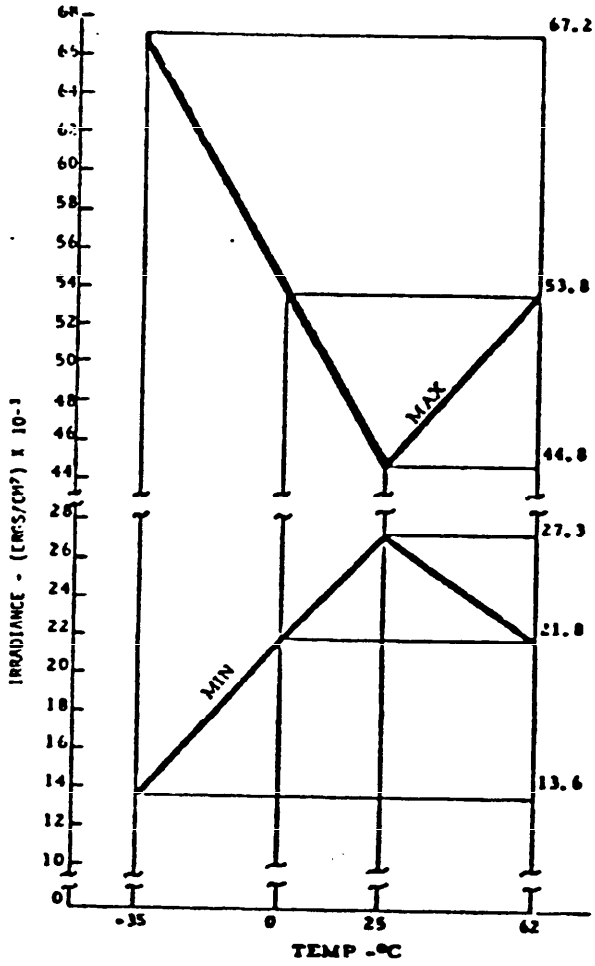


FIGURE 2. 50 Meter Beam Center Irradiance (152mm Shillelagh Missile).

3.4 Characteristics.

3.4.1 Operating conditions. The operating conditions shall be in accordance with Table III, measured under quiescent conditions. For terminal and component designations called out in this specification, see drawing 11749309, Schematic Diagram, 152mm WFS Transmitter and drawing 11749205, Schematic Diagram, Laser.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE III. Operating Conditions.

Parameter	Terminal	Minimum	Nominal	Maximum	Unit
Ambient Temperature		-32	25	63	°C
Input (+) Power	3,4	7.3	9.0	12.0	Vdc
Return (-) Power	9,10,11,14, 16,17,18				
Input Current	3,4		2.0	3.5 1/	mA

NOTE:
1/ Quiescent condition.

3.4.2 Performance. Unless otherwise specified, the PWBA shall meet the requirements of this specification under the following conditions:

a.	Temperature	25°±10°C (77°±18°F)
b.	Relative humidity	50±30 %
c.	Barometric pressure	725+50, -75mm Hg (28.5+2.0, -3.0 inches Hg)
d.	Input power and loads	See Figure 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

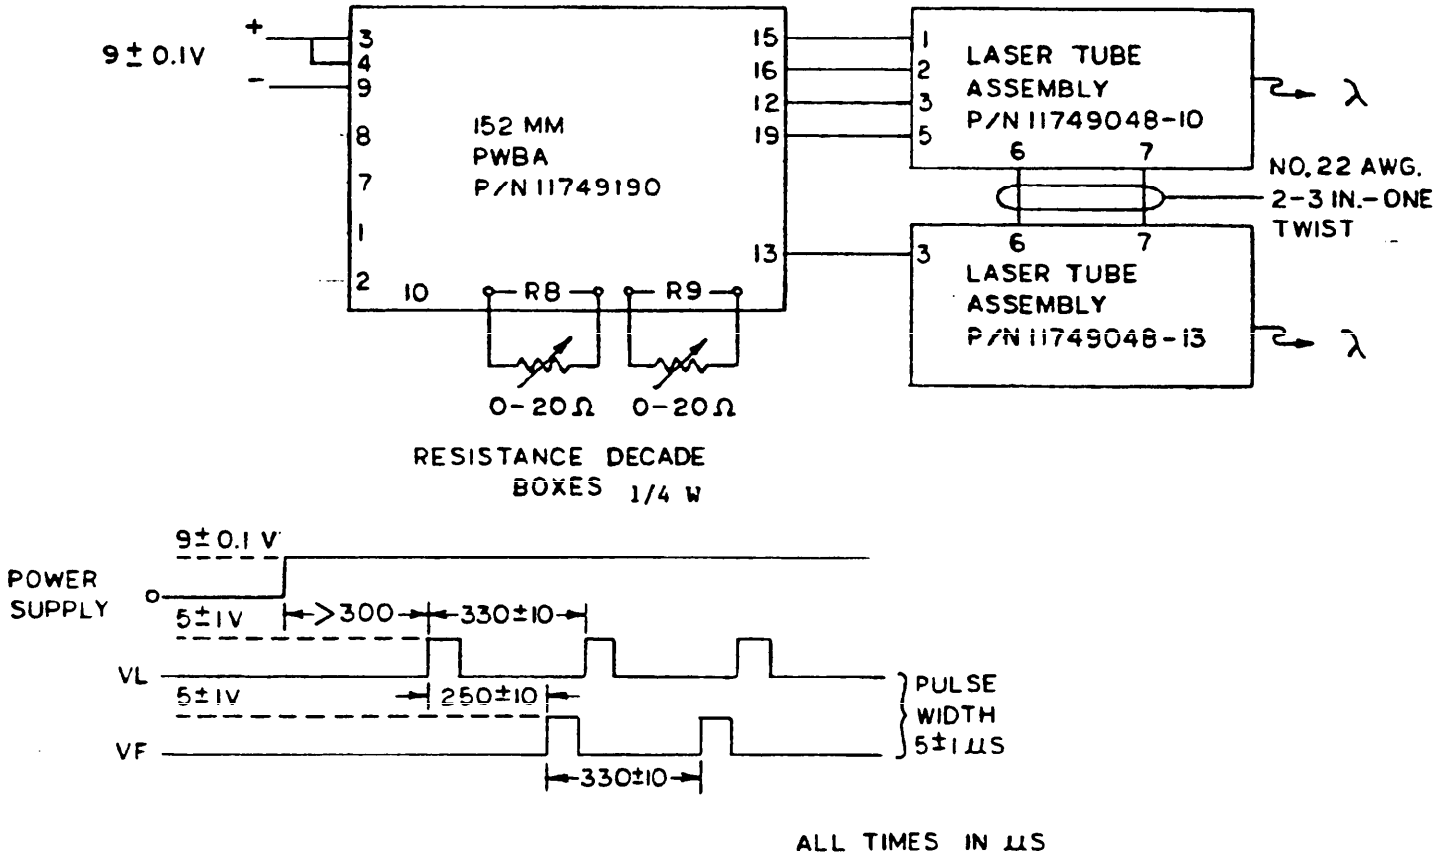


FIGURE 3. 152mm Laser Tube/PWBA Power Source and Loads.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

3.4.2.1 Current drain. Following application of power by applying 9± 0.1v to terminals 3 and 4 of the PWBA the quiescent current drain shall be no more than 3.5 mA.

3.4.2.2 152mm main gun laser irradiation. With power applied to the PWBA, V_L connected to terminal 7, V_F connected to terminal 2, and terminals 8 and 1 connected to 10, the 152mm main gun laser irradiation shall be within the room temperature limits of Figure 1.

3.4.2.3 Shillelagh laser irradiation. With power applied to the PWBA, V_L connected to terminal 8, V_F connected to terminal 1, and terminals 7 and 2 connected to 10, the Shillelagh laser irradiation shall be within the room temperature limits of Figure 2.

3.4.2.4 Laser energy (152mm main gun). With power applied to the PWBA, V_L connected to terminal 8, V_F connected to terminal 2, and terminals 7 and 1 connected to 10, the maximum energy emitted from the 152mm main gun shall be 5.2 ergs.

3.4.2.5 Laser pulses. With power applied, V_L connected to terminal 8 (Shillelagh) or 7 (152mm), V_F connected to terminal 1 (Shillelagh) or 2 (152mm), and terminals 7 and 2 connected to 10 (Shillelagh) or terminals 1 and 8 connected to 10 (152mm), the laser tubes shall then output pulses that correspond to the V_F pulses in frequency, width and timing.

3.4.3 Environmental requirements. Unless otherwise specified the assembly shall be subjected to the following environmental conditions and meet the stated requirements.

3.4.3.1 High temperature. The assembly shall not be damaged and shall meet the performance requirements of 3.4.2. when exposed to and after the following.

3.4.3.1.1 Operating temperature. The assembly shall operate up to a temperature of +63°C (+145°F) after 4 hours of exposure at 63°C.

3.4.3.2 Low temperature. The assembly shall not be damaged and shall meet the performance requirements of 3.4.2 when exposed to and after the following.

3.4.3.2.1 Operating temperature. The assembly shall operate down to a temperature of -31.7°C (-25°F) after exposure at -31.7°C for 4 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.4.3.2.2 Storage temperature. The assembly shall operate after exposure to a temperature of -34.4°C (-30°F) for a period of 24 hours.

3.4.3.3 Shock. The assembly shall meet the performance requirements of 3.4.2 after shocks with a nominal level of 40 g's terminal peak and nominal duration of 11 milliseconds as shown in Figure 4. Apply three shocks (18 total) in each direction of the three mutually perpendicular axes.

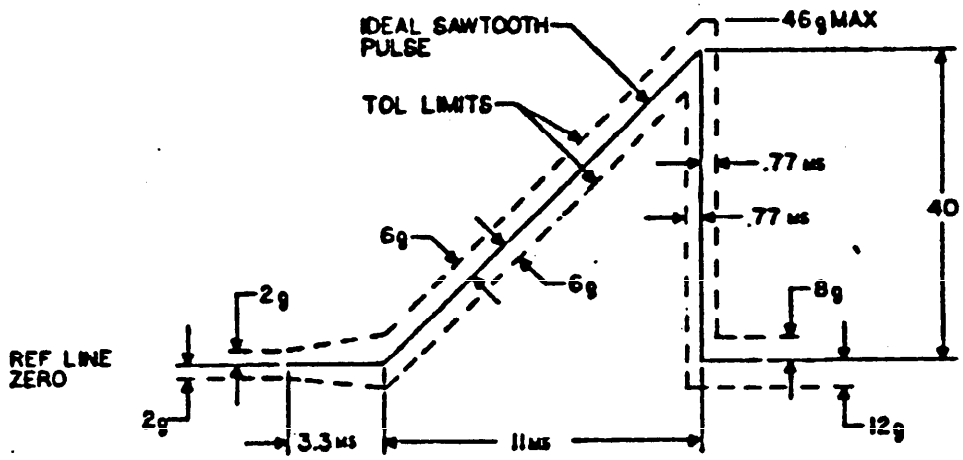


FIGURE 4. Shock Pulse.

3.4.3.4 Vibration. The assembly shall meet the performance requirements of 3.4.2 after sinusoidal vibrations of frequency and amplitude given below and in Figure 5 on three mutually perpendicular axes. Total duration shall be 60 minutes per axis.

Frequency	Amplitude	Sweep rate
7-30 Hz	±1.5 g	7-500-7 Hz
30-50 Hz	0.033" DA	in 15 minutes
50-500 Hz	±4.2 g	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

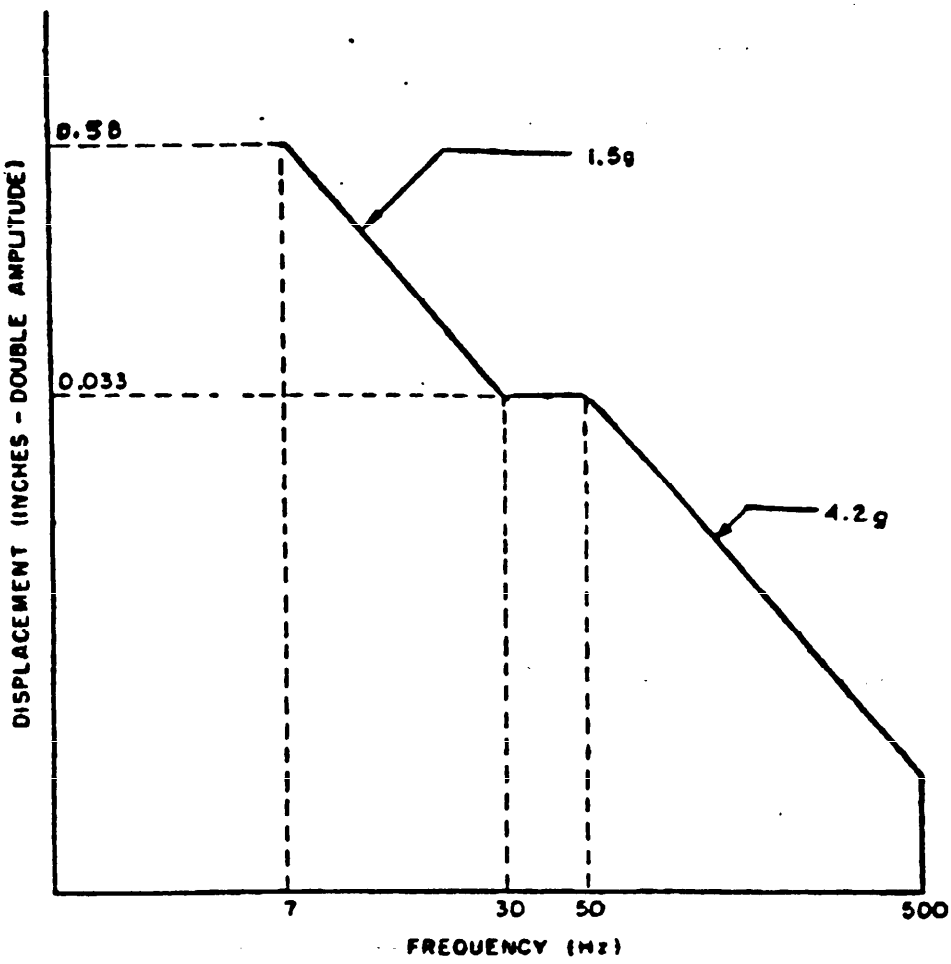


FIGURE 5. Vibration Test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.5 Design and construction. The laser tube/PWBA shall be fabricated and assembled in accordance with drawings, parts lists, and other documents specified on drawings 11749190 and 11749048. The laser tube/PWBA shall be manufactured and tested in a working environment in accordance with Table I, work area 5 of MIL-STD-1695.

3.5.1 Standards of manufacture. Handling of Electrostatic Sensitive Parts. This equipment contains semiconductor devices such as CMOS, mosfets, and microelectronic devices which may be degraded or damaged by an inadvertent discharge of static electricity. To prevent damage to these components, the supplier shall provide for adequate handling procedures and equipment in accordance with MIL-STD-1686 and DoD-HBK-263.

3.5.2 Soldering. Soldering shall be in accordance with the general requirements of section 4 of MIL-STD-2000.

3.5.3 Workmanship. General workmanship shall be in accordance with requirement 9 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Environmental stress screen (see 4.5).

c. Quality conformance inspection (see 4.6).

d. Packaging inspection (see 4.6.4).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the working environment specified in 3.5 and at standard ambient conditions defined in 3.4.2 using the methods of 4.8 and 4.9.

4.4 First article inspection.

4.4.1 Sample. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.4.2. The first article sample shall consist of three printed wiring board assemblies.

4.4.2 Inspections to be performed. First article inspections are listed in Tables IV and V. Each first article sample unit shall be inspected in accordance with the Table IV before being subjected to the environmental tests in Table V in the sequence listed. As determined by the Government, the first article assemblies may be subjected to any or all of the examinations and tests specified in this detail specification and be inspected for compliance with any or all requirements of the applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE IV. Examinations and Performance Tests. 1/ 2/

Class	Characteristics	Requirements Paragraph	Test/ inspection Method	First Article Sample Size	Quality 3/ Conformance Inspection Sample Size/ Acceptance Criteria
101	Current Drain	3.4.2.1	4.8.2.1	3	32/Acc-0,Rej-1
102	152mm Laser Irradiation	3.4.2.2	4.8.2.2	3	32/Acc-0,Rej-1
103	Shillelagh Laser Irradiation	3.4.2.3	4.8.2.3	3	32/Acc-0,Rej-1
104	Laser Energy (152mm)	3.4.2.4	4.8.2.4	3	32/Acc-0,Rej-1
105	Laser Pulses	3.4.2.5	4.8.2.5	3	32/Acc-0,Rej-1
201	Workmanship	3.5.3	Visual	3	125/Acc-0,Rej-1
202	Soldering 4/	3.5.2	Visual	3	125/Acc-0,Rej-1
203	Conformal Coating	3.5	Visual	3	125/Acc-0,Rej-1
204	Dim Characteristics	3.5	SME 5/	3	125/Acc-0,Rej-1
205	Comp Orientation	3.5	Visual	3	125/Acc-0,Rej-1
206	Comp and Board Identification	3.5	Visual	3	125/Acc-0,Rej-1

NOTES:
1/ ESS testing per 4.5 is required for all deliverable units.
2/ 200 class (minor charactristics) examinations required prior to 100 class (major characteristics) performance tests.
3/ For lot sizes less than 32 or 125 as listed, 100% inspection is required (see 4.6.5).
4/ Check before conformal coating is applied.
5/ Standard Measuring Equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE V. Environmental Tests.

Class	Characteristic	Requirements Paragraph	Test Paragraph	First Article Sample Size	Quality Conformance Inspection Sample Size/ Acceptance Criteria
106	High Temp	3.4.3.1	4.9.1	3	1/Acc-0, Rej-1
107	Low Temp	3.4.3.2	4.9.2	3	1/Acc-0, Rej-1
108	Shock	3.4.3.3	4.9.3	3	1/
109	Vibration	3.4.3.4	4.9.4	3	1/

NOTE:
1/ Not required for quality conformance inspection.

4.4.3 Rejection. If any assembly fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure of any assembly to comply with any of the requirements.

4.5 Environmental stress screen. An environmental stress screening program shall be established. All units shall be subjected to a thermal stress screen in accordance with Table VI and the procedure below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE VI. ESS Temperature Cycling Requirements.

Low Temp	High Temp	Rate Change	Power	Monitor	Cycles/ Group A Test
-35°C	+63°C	15°C/minute	Off	No	20/Failure Free or Additional Cycle

4.5.1 Conformal coating. Thermal stress screen be performed prior to conformal coating unless another method is approved by the Government.

4.5.2 Chamber temperature. Chamber temperature cycling shall be from -34.4°C (-30°F) to +63°C (+145°F) and the duration of one cycle to be 8 minutes up and 8 minutes down plus 4 minutes dwell at high temperature and 4 minutes at low temperature for a total cycle duration of 24 minutes. The units shall begin and end the cycles at ambient temperature (see Figure 6).

4.5.3 Cycle frequency. A total of twenty temperature cycles are to be imposed on each unit.

4.5.4 Thermal cycles. Thermal cycling of all units shall be nonoperating and without power (static).

4.5.5 Test requirements. After the thermal stress screen, the units shall meet the Group A tests (4.6.2). If a unit is rejected, the unit shall be repaired (if possible) and be put through one additional cycle of ESS. The unit shall then undergo and pass Group A tests.

4.6 Quality conformance inspection. Quality conformance inspection requirements are defined in 4.6.2 and 4.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

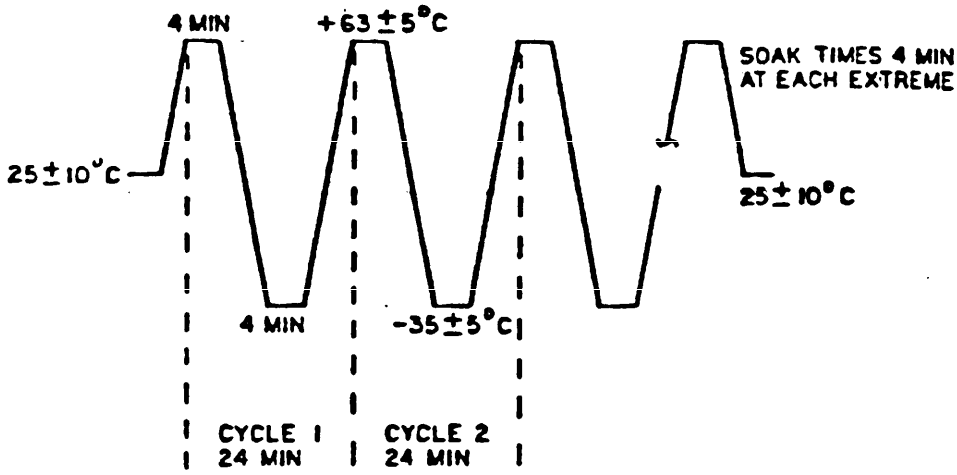


FIGURE 6. Environmental Stress Screen Temperature Profile.

4.6.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn of which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior of subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.6.2 Group A tests. Group A tests consist of examinations and performance tests listed in Table IV in the quantities specified.

4.6.3 Group B tests. Group B tests shall consist of the tests indicated in Table V and shall be conducted on one sample unit per inspection lot which has been subjected to, and passed, Group A tests (see 4.6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.6.4 Inspection of packaging. The sampling and inspection of the preservation, packing, and container marking shall verify that the units are packaged in accordance with the requirements of 5.1. During the period of first article inspection, one additional unit, packaged in accordance with 5.1, shall be examined to the requirements for quality conformance inspection listed below. Failure of packaging shall be cause for rejection of packaging. Two units per lot shall be examined for the following:

a. Verify that the outside bag is marked in accordance with MIL-STD-129 and is properly closed.

b. Verify that sleeve is around box and that foam properly surrounds inner bag.

c. Verify that the inner bag is properly sealed.

d. Verify that the unit is not damaged after the removal of all packaging materials.

4.6.5 Failure of sample. Should any one sample fail to meet any of the specified examinations and test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract (see 6.7).

4.7 Inspection equipment.

4.7.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607 and MIL-W-63150.

4.7.2 Contractor-furnished inspection equipment.

4.7.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAP/QARs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs (see 6.3).

4.7.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the Methods of Inspection specified in 4.8 and 4.9 of this specification and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

with the component inspection procedures specified in Examination and Test Facilities requirements of MIL-F-13926, whenever Government designs are not specified (see 4.7.2.1). Since tolerance of test equipment is normally considered to be within ten percent of product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. When specified in contract or purchase order, the contractor shall submit inspection equipment designs for government review and evaluation (see 6.3).

4.7.2.3 Test equipment. In conjunction with 4.7.2.1 and 4.7.2.2, the test equipment listed in Table VII (Test equipment list) shall be used in the performance of the applicable test methods and procedures as specified in 4.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

TABLE VII. Test Equipment List.1/

Power Supplies (DC)	Standard - capable of providing levels and limits stated in 4.8.2.
Ammeter/Multimeter	Standard - capable of measuring currents stated in 4.8.2.
Resistance Decade Boxes	Standard - capable of providing ohmage stated in 4.8.2.
Pulse Generator	Standard - capable of providing pulses stated in 4.8.2.
Laser Energy Meter and Pulse Integrator	Equivalent to EG&G Model 460-1A and 460-3 - capable of measuring laser energy specified in 4.8.2.
Laser Detector Head	Equivalent to EG&G Model 460-2 - capable of detecting light specified in 4.8.2.
Radiometer/Photometer and Pulse Indicator	Equivalent to EG&G 550-1 and 550-3 - capable of measuring irradiance laser energy specified in 4.8.1 and 4.8.2.
Silicon Multiprobe	Equivalent to EG&G 550-2 - capable of detecting laser energy specified in 4.8.1 and 4.8.2.
Si-PN Detector Module	P/N 11748854 - used in 4.8.2.5
Helmet (MWLD) PWBA	P/N 11749020 - used in 4.8.2.5
Dual Channel Oscilloscope	Standard - Capable of measuring pulses in 4.8.2.5.

NOTE:
1/ Must be calibrated to the requirements of MIL-STD-45662 prior to use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.8 Methods of innspection. Unless otherwise specified in the contract, the following procedures shall be utilized to conduct specified tests. If the contractor chooses to use alternate test procedures, a detailed description of the set-up and procedure shall be submitted to the Government procuring agency for approval prior to use (see 4.7.2.2).

4.8.1 Matched assemblies. To obtain the matched assemblies, connect the laser tube/PWB assembly into the circuit of Figure 7 for the purpose of identifying resistor values R8 and R9 of the assembly. In order to meet the requirements of 3.1.1, apply power by turning ON S1 and leaving all other switches as shown, unless otherwise specified. Set the pulse generator to provide the pulses V_L and V_F of Figure 1. Turn on the radiometer, set the radiometer and multiprobe to microJoules/cm^2 and turn on the radiometer's autorange switch. Align the multiprobe to the laser before proceeding.

4.8.1.1 Setting R8. To set R8, set R9 to a nominal value from the range given in 3.1.1, set S2 to position 1, set S3 to position 1, turn ON S4 and adjust R8 so that the appropriate Shillelagh irradiance energy of 3.1.1 is indicated on the radiometer. Replace R8 with a fixed resistor nearest in value from PL11749190.

4.8.1.2 Setting R9. To set R9, set S2 to position 2, set S3 to position 2, turn ON S4 and adjust R9 so that the appropriate 152mm irradiance energy of 3.1.1 is indicated on the radiometer. Replace R9 with a fixed resistor nearest in value from PL11749190.

4.8.2 Performance tests. After R8 and R9 have been fixed, the following tests and examinations shall be performed to demonstrate compliance with 3.4.2. The laser tube/PWBA shall be connected to the circuit specified in Figure 7. Apply power by turning ON S1 and leaving on until all tests have been completed. All other switches shall be OFF unless otherwise specified in 4.8.2.1 through 4.8.2.5. Set the pulse generator to provide the pulses shown in Figure 3. Turn on the laser power meter, set the detector head and power meter to 904nm, and set the decade range on the integrator module to 10^{-6}. Turn on the radiometer/ photometer, turn on the autorange, set the unit selector thumbwheel and the multiprobe switch to micro Joules/cm^2 (note that 1 erg = 10^{-7} Joule) and set the decade range on the integrator module to 10^{-3}.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the currentversion before use.

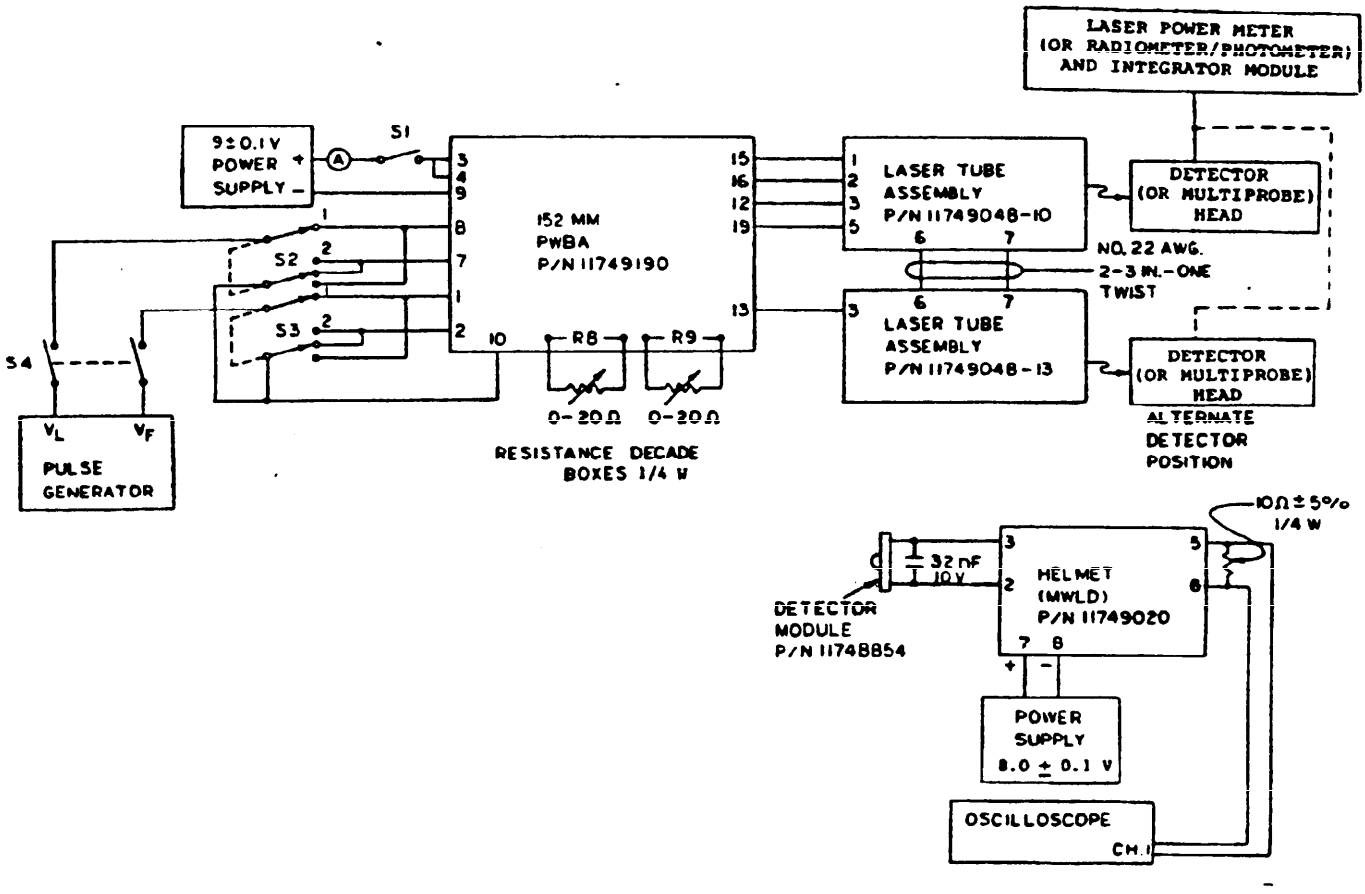


FIGURE 7. Test Circuit for 152mm.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.

4.8.2.1 Current drain. Apply input power and verify the quiescent current meets the requirements of 3.4.2.1.

4.8.2.2 152mm main gun laser irradiation. To verify the 152mm laser irradiation requirements of 3.4.2.2, proceed as follows: set S2 to position 2, set S3 to position 2, turn ON S4, align the multiprobe with the laser and verify that the irradiation requirements of 3.4.2.2 are met on the radiometer.

4.8.2.3 Shillelagh laser irradiation. To verify the Shillelagh laser irradiation requirements of 3.4.2.3, proceed as follows: set S2 to position 1, set S3 to position 1, turn ON S4, align the multiprobe with the laser and verify that the irradiation requirements of 3.4.2.3 are met on the radiometer.

4.8.2.4 Laser energy (152mm main gun). To verify the requirements of 3.4.2.4, proceed as follows: set S2 to position 1, set S3 to position 2, turn ON S4, align the detector with the laser and verify the maximum energy requirements of the 152mm main gun are met on the power meter.

4.8.2.5 Laser pulses. Test the laser pulses by replacing the radiometer and power meter with the detector module and helmet (MWLD) PWBA, 11749020, combination. Power the helmet (MWLD) and the oscilloscope, set S2 to position 1, set S3 to position 1, turn ON S4 and verify the requirements of 3.4.2.5 are met for the Shillelagh by making measurements with the oscilloscope. Next turn OFF S4, set S2 to position 2, set S3 to position 2, turn ON S4 and verify the requirement of 3.4.2.5 are met for the 152mm by making measurements with the oscilloscope.

4.9 Environmental tests.

a. Unless otherwise specified, environmental tests shall be conducted in accordance with the test conditions and general test performance guidance of MIL-STD-810. Test facilities, chambers and apparatus used in conducting the tests required by this specification shall be capable of meeting the conditions specified.

b. Where necessary in the following tests, it shall be permissible to temporarily open chamber doors to permit access to and manipulation of test equipment and sample.

4.9.1 High temperature. This satisfies the storage and operating conditions of high temperature requirements as

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

specified in 3.4.3.

4.9.1.1 Storage and operating. The assembly shall be tested in accordance with MIL-STD-810, Method 501 using the following procedures:

a. Step 1 - Place the test item, configured for high temperature test, into the temperature chamber.

b. Step 2 - Raise the internal temperature to 63°C (145°F).

c. Step 3 - Maintain the internal chamber temperature for a period of 4 hours while insuring the relative humidity is not in excess of 15 percent.

d. Step 4 - Operate the test item until the item is stabilized and perform the tests required in 4.8.2.

e. Step 5 - Return the test item, nonoperating, to standard ambient condition and stabilize.

f. Step 6 - Visually inspect for physical damage and in the absence of physical damage, perform the tests required in 4.8.2.

4.9.2 Low temperature. This satisfies the storage and operating conditions of low temperature requirements as specified in 3.4.3.

4.9.2.1 Storage and operating. The assembly shall be tested in accordance with MIL-STD-810, Method 502 using the following procedure:

a. Step 1 - Place the test item, configured for low temperature test, into the temperature chamber.

b. Step 2 - Lower the internal chamber temperature to -34.4°C (-30°F) and maintain for a period of 24 hours after stabilization.

c. Step 3 - Adjust the internal chamber temperature to -31.7°C (-25°F) and maintain the temperature for a period of 4 hours.

d. Step 4 - Operate the test item until the item is stabilized and perform the tests required in 4.8.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

e. Step 5 - Return the test item, nonoperating, to standard ambient conditions and stabilize.

f. Step 6 - Visually inspect for physical damage and in the absence of physical damage, perform the tests required in 4.8.2.

4.9.3 Shock. The assembly, when mounted on a fixture that simulates its next higher assembly (see Figure 8), shall be tested in accordance with MIL-STD-810, Method 516.3, Section II, Procedure I, with the following modifications:

a. Step 3 - the assembly shall be in a non-operational mode.

b. The step 3 test transient shall be in accordance with 3.4.3.3.

c. Step 5 - the assembly inspection and functional verifications shall not be conducted until shock has been completed in all three axes.

d. After shock testing the assembly shall not be damaged and shall be subjected to the performance tests specified in 4.8.2.

4.9.4 Vibration. The assembly, when mounted on a fixture that simulates its next higher assembly (See Figure 8), shall be tested in accordance with MIL-STD-810, Method 514.3, Section II, Procedure I, for a duration of 60 minutes with the following modifications:

a. Step 4 - mount the test item on vibration equipment.

b. Step 5 - expose the assembly to test level and durations as specified in 3.4.3.4.

c. Step 6 - does not apply.

d. Step 7 - the assembly inspection and functional verification shall not be conducted until vibration has been completed in all three axes.

e. After vibration testing the assembly shall not be damaged and shall be subjected to the performance tests specified in 4.8.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

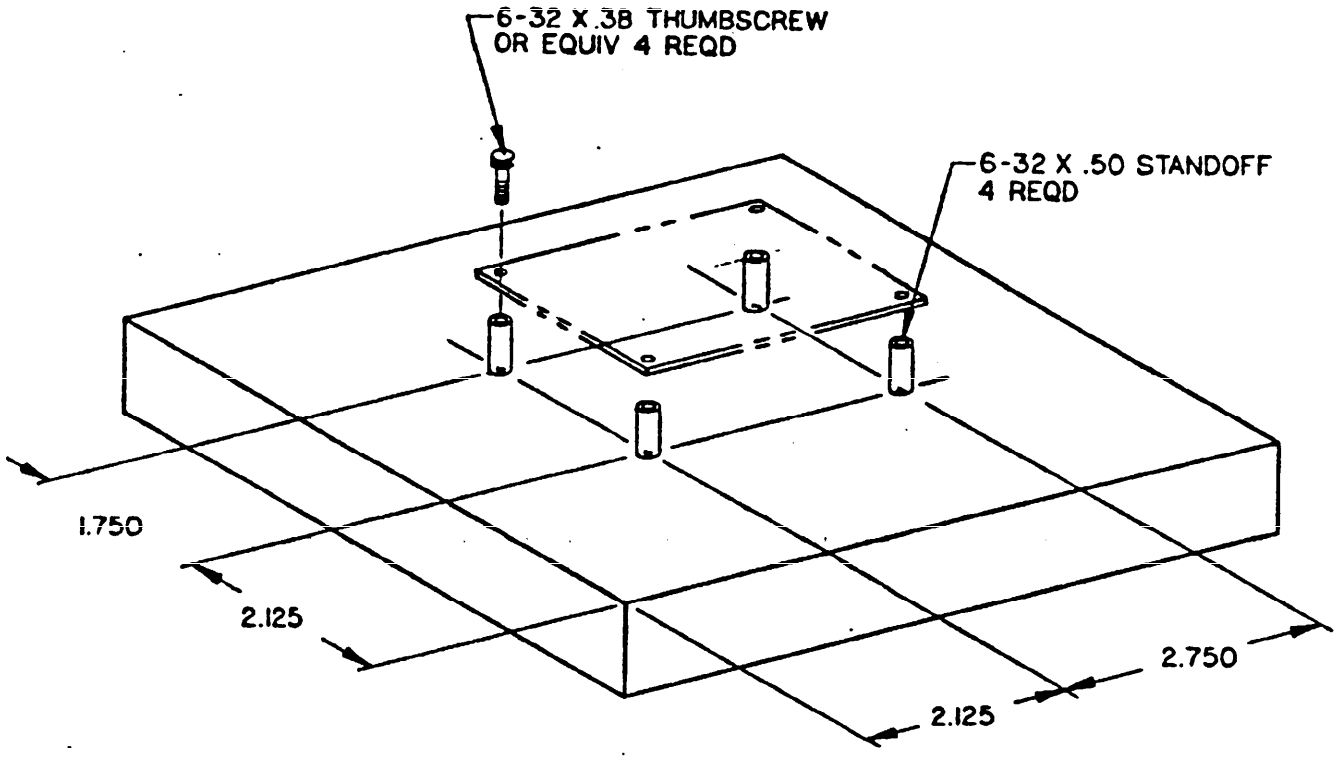


FIGURE 8. Mounting Configuration.

4.10 Certifications. Certification shall be provided that all units have been produced in accordance with the requirements of 3.5 and packaged in accordance with the requirements of 5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with SPI-P11749645. The level of protection shall be A, B, or C, as defined by the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The 152mm Laser Tube/PWB assembly and 152mm Shillelagh Missile Laser Tube/PWB Assembly are part of the Multiple Integrated Laser Engagement System.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

a. Title, number and date of this specification (see page 1).

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

c. Special tests and examinations required (see 4.2); the type of inspection required; and the activity responsible for testing, and its facility (see 4.1).

d. Whether a first article sample is required (see 3.2), and if so, pertinent details (see 4.4) including disposition of the first article sample.

e. Certification of conformance for each lot or shipment of product.

f. Whether Government-Loaned Property (Government Furnished inspection/test equipment) of 6.8 is available or will the contractor be required to furnish inspection equipment (see 4.7).

g. Applicable level(s) of preservation, packaging, packing and marking instructions (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

6.3 Submission of contractor inspection equipment designs for approval. Unless otherwise specified, submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF- I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. The letter of submittal shall specify, the contractor; contract number; title, number and revision of this specification; item nomenclature; classification of defect and test paragraph.

6.4 Definitions.

6.4.1 MILES. Multiple Integrated Laser Engagement System.

6.4.2 SME. Standard Measuring Equipment.

6.5 Drawings. Drawings listed in Section 2 of this specification under heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.6 Noncompliance. If a sample fails to pass group B inspection, the manufacturer shall notify the qualifying activity and the cognizant inspection activity of such failure and take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which were manufactured with essentially the same materials and processes, and which are considered subject to the same failure. Acceptance and shipment of the product shall be discontinued until corrective action, acceptable to the qualifying activity has been taken. After the corrective action has been taken, group B inspection shall be repeated on additional sample units (all tests and examinations, or the test which the original sample failed, at the option of the qualifying activity). Group A inspections may be reinstituted; however, final acceptance and shipment shall be withheld until the group B inspection has shown that the corrective action was successful. In the event of failure after reinspection, information concerning the failure shall be furnished to the cognizant inspection activity and the qualifying activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

6.8 Government-loaned property. Unless otherwise specified (see 6.2), the contracting officer should arrange to loan the following Government furnished Inspection/Test equipment specified below:

P/N	Title	Ref. Paragraph
11748854	Detector Module, Si-PN	4.8.2.5
11749020	PWBA, Helmet (MWLD)	4.8.2.5

6.9 Subject term (key word) listing.

Fire Control
Training Devices
Detector Module
Transmitter

Custodians:
Army - AR

Preparing Activity:
Army - AR

(Project 1265-A012)

User activities:
Army - MR
Navy - CG, MC
Air Force - 90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

performance of the inspection requirements specified herein, the

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-L-70848 (AR)	2. DOCUMENT DATE (YYMMDD) 18 June 1991

3. DOCUMENT TITLE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Commander US Army ARDEC	b. TELEPHONE (Include Area Code) (1) Commercial: (201) 724-6674 (2) AUTOVON: 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:30Z
Check the source to verify that this is the current version before use.