MILITARY SPECIFICATION

POWER PLANT, ELECTRIC, TRAILER MOUNTED:

DIESEL ENGINE, 10 KW, 50/60 HERTZ, AN/MJQ-18

This amendment forms a part of MIL-P-52897A(ME), dated 30 November 1982, and is approved for use within the USA Belvoir Research, Development, and Engineering Center, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1, under SPECIFICATIONS, FEDERAL, delete:

"PPP-P-40 - Packaging and Packing of Hand Tools."

2.1, under STANDARDS, MILITARY, delete:

"MIL-STD-1183 - Commercial Packaging of Supplies and Equipment."

and add:

"MIL-STD-889 - Dissimilar metals."

PAGE 3

After 3.1.1.1, add the following new paragraph:

"3.1.1.2 Safety. Any changes, deviations, and waivers to TA13220E6335 shall conform with the following requirements. All rotating or reciprocating parts and other parts subject to high operational temperatures that are of such a nature or are so located as to be a hazard to operating personnel, shall be guarded or insulated to the extent necessary to eliminate the hazard. Electrical equipment shall be effectively guarded and grounded to protect all persons and objects from electrical shock hazard."

3.2, delete in its entirety and substitute:

"3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of power plants from the approved first article during production

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

DESTROY BARRIER MATERIAL (C) ANY

will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish power plants conforming to this specification."

3.3, line 3, delete "this specification (see 6.8)." and substitute "3.3.1, 3.3.2, 3.3.3, and 3.3.4 in this specification."

After 3.3, add the following new paragraphs:

"3.3.1 Material deterioration and control. The item(s) shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operation and storage environment to which the item may be exposed.

"3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

"3.3.3 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

"3.3.4 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the power plants may be newly fabricated from recovered materials to the maximum extent practicable, provided the power plants produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the power plants."

PAGE 4

3.5, after last sentence add: "External surfaces shall be free from burrs, sharp edges and corners except when sharp edges and corners are specified on the applicable drawings."

4.1, line 6, after "perform" add "or repeat".

4.1.1, lines 2 and 3, delete "preproduction" and substitute "first article".

PAGE 5

4.2, line 3, delete "preproduction" and substitute "first article".

4.3, line 1, delete "Preproduction Inspection" and substitute "First article inspection".

4.3.1, line 1, delete "preproduction" and substitute "First article".

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

4.3.2, line 1, delete "power plant components" and substitute "first article".

4.5.1, under defects, delete 101 through 106 in their entirety and substitute:

"101. Material not as specified.
102. Materials are not resistant to corrosion or deterioration or treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment.
103. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.
104. Contractor does not have documentation available for identification of material, material finishes or treatments.
105. Used, rebuilt, or remanufactured components, pieces or parts incorporated in the generator sets.
106. Treatment and painting not as specified.
107. Dimensions not as shown on drawings.
108. Components missing or not as specified.
109. Assembly not as shown on the drawings.
110. Workmanship not as specified.
111. Safety not as specified."

4.5.2.1, delete in its entirety and substitute:

"4.5.2.1 Test conditions. The following preparation shall be made prior to testing the switch box assembly:

a. Cables running between the switch box assembly and the generator sets shall be installed to the switch box assembly rotary switch.
b. The free ends of the cables shall be attached to each generator set as follows:

(1) Cable wire marked L1 shall be attached to Phase A.
(2) Cable wire marked L2 shall be attached to Phase B.
(3) Cable wire marked L3 shall be attached to Phase C.
(4) Cable wire marked LO shall be attached to neutral.

c. A 3 phase, 4 wire, 5 kw resistive load shall be connected to the output of the switch box."

4.5.2.3, delete in its entirety and substitute:

"4.5.2.3 Operation. The rotary switch of the switch box shall be placed in the generator No 1 position. Start and operate the generators in accordance with the operator's manual at the rated load through the rotary switch for a minimum of 5 minutes. During this period, phase sequence (rotation) shall be tested in accordance with MIL-STD-705, method 507.1. Phase rotation shall be L1, L2, and L3. This test shall be performed at the load terminals of the switch box. At the conclusion of the generator No. 1 position test, the rotary switch shall be placed in the generator No. 2 position. Repeat the test. "

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:39Z
Check the source to verify that this is the currentversion before use.

Inability of the switch box assembly to maintain or transfer a rated load shall constitute failure of this test. Failure of the GFE generators to operate in accordance with the operator's manual shall not constitute failure of the test. The contracting officer shall be notified immediately of any such failure.

4.6.1, line 1, delete "preproduction" and substitute "first article" at two places.

4.6.2.3, under defects, delete 107 through 119 in their entirety and substitute:

"112. Generator set not preserved as specified.
113. Fire extinguisher not removed and preserved as specified for levels A and B.
114. Accessories not placed and secured in the accessory box as specified for all levels.
115. Oil drain not disconnected and secured as specified for level A.
116. Power cables and ground wires not disconnected; cables, wires, and terminals not matchmarked and secured as specified.
117. Technical publications not preserved and secured as specified.
118. Tarpaulin not folded and wrapped as specified.
119. Trailer chassis components not preserved as specified.
120. Packing not as specified for generators and all accessories.
121. Depreservation guides not prepared and attached to the power plant as specified.
122. Marking illegible, incomplete, incorrect, or missing."

PAGE 7

5.1, lines 1, 6, 7, 8, and 11, delete "preproduction" and substitute "first article".

5.2, line 1, delete "Level A, Level B, or Commercial" and substitute "Level A, B, or C".

5.2.1.2 through 5.2.1.10, delete in their entirety and substitute:

"5.2.1.2 Fire extinguisher. The fire extinguisher shall be removed from the bracket and preserved in a box conforming to PPP-B-636, type CF, "class domestic", variety SW, grade 125, style optional and shall be secured to one of the generator sets with tape conforming to PPP-T-97, type IV.

"5.2.1.3 Accessories. The ground rods, fuel can adapters, hammer, and the driver/puller shall be placed in the accessory box and secured to prevent movement.

"5.2.1.4 Oil drain. The oil drain shall be disconnected at the trailer bed and secured to the generator frame with PPP-T-97, type IV tape.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

"5.2.1.5 Power cables and ground wires. Power cables and ground wires shall be disconnected from the generator sets. The cables, wires, and terminals on the generator sets shall be matchmarked with tags conforming to UU-T-81, type A to facilitate reinstallation of the cables and wires. The ground wires and clamps shall be secured to one of the generator sets, with PPP-T-97, type IV tape. Ends of power cable shall be taped or covered."

"5.2.1.6 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1 and shall be placed in the accessory box.

"5.2.1.7 Tarpaulin. The tarpaulin shall be folded to form a minimum size pack and shall be wrapped in plastic film conforming to L-P-378, type I, class 1, grade A, 4 to 8 mil. The wrap shall be secured with tape conforming to PPP-T-97, type IV.

"5.2.1.8 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A as specified for mobile vehicles."

PAGE 8

5.2.2.2 through 5.2.2.6, delete in their entirety and substitute:

"5.2.2.2 Fire extinguisher, ground rods, and hammer. The fire extinguisher, ground rods, hammer, fuel can adapter, and driver/puller shall be preserved as specified for level A.

"5.2.2.3 Power cables and ground wires. The power cable and ground wires shall be disconnected; the cable, wire, and generator terminals matchmarked; and the wires and cables placed and secured as specified for level A.

"5.2.2.4 Technical publications and tarpaulin. Technical publications and tarpaulin shall be preserved as specified for level A.

"5.2.2.5 Trailer chassis. The trailer chassis components shall be preserved in accordance with MIL-STD-281, level A, as specified for mobile vehicles."

PAGE 9

5.2.3, delete in its entirety and substitute:

"5.2.3 Level C. All unpainted surfaces shall be preserved to provide protection against deterioration and damage during shipment from the contractor to the initial destination. Cables shall be disconnected and matchmarked. All loose components shall be placed in the accessory box or secured in their designated brackets. Technical publications shall be placed in a waterproof bag and placed in the accessory box."

5.3, delete "Level A, Level B, or Commercial" and substitute: "Level A, B, or C."

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

5.3.2, delete in its entirety and substitute:

"5.3.2 Level C. Power plants shall be shipped mobile. All components shall be stowed or secured to prevent loss or damage during shipment."

5.4, 5.4.1, 5.4.2, delete in their entirety and substitute:

"5.4 Marking. Marking shall be in accordance with MIL-STD-129."

6.2, c and e, delete "preproduction" and substitute "first article."

PAGE 10

6.2, delete "d" in its entirety.

6.2, f, delete in its entirety and substitute:

"f, Level of preservation and of packing required (see 5.2 and 5.3)."

"6.3, delete in its entirety and substitute the following:

"6.3 First article. When a first article inspection is required, the items should be a preproduction model. The first article should consist of 1 or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article."

6.5, lines 1, 2, and 3, delete "preproduction" and substitute "first article."

6.8, delete in its entirety.

PAGE 12

Delete "figure 1", and substitute new "figure 1".

PAGE 13

Delete, "figure 2", and substitute new "figure 2".

PAGE 14

Delete, "figure 3", and substitute new "figure 3".

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 6115-A510

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

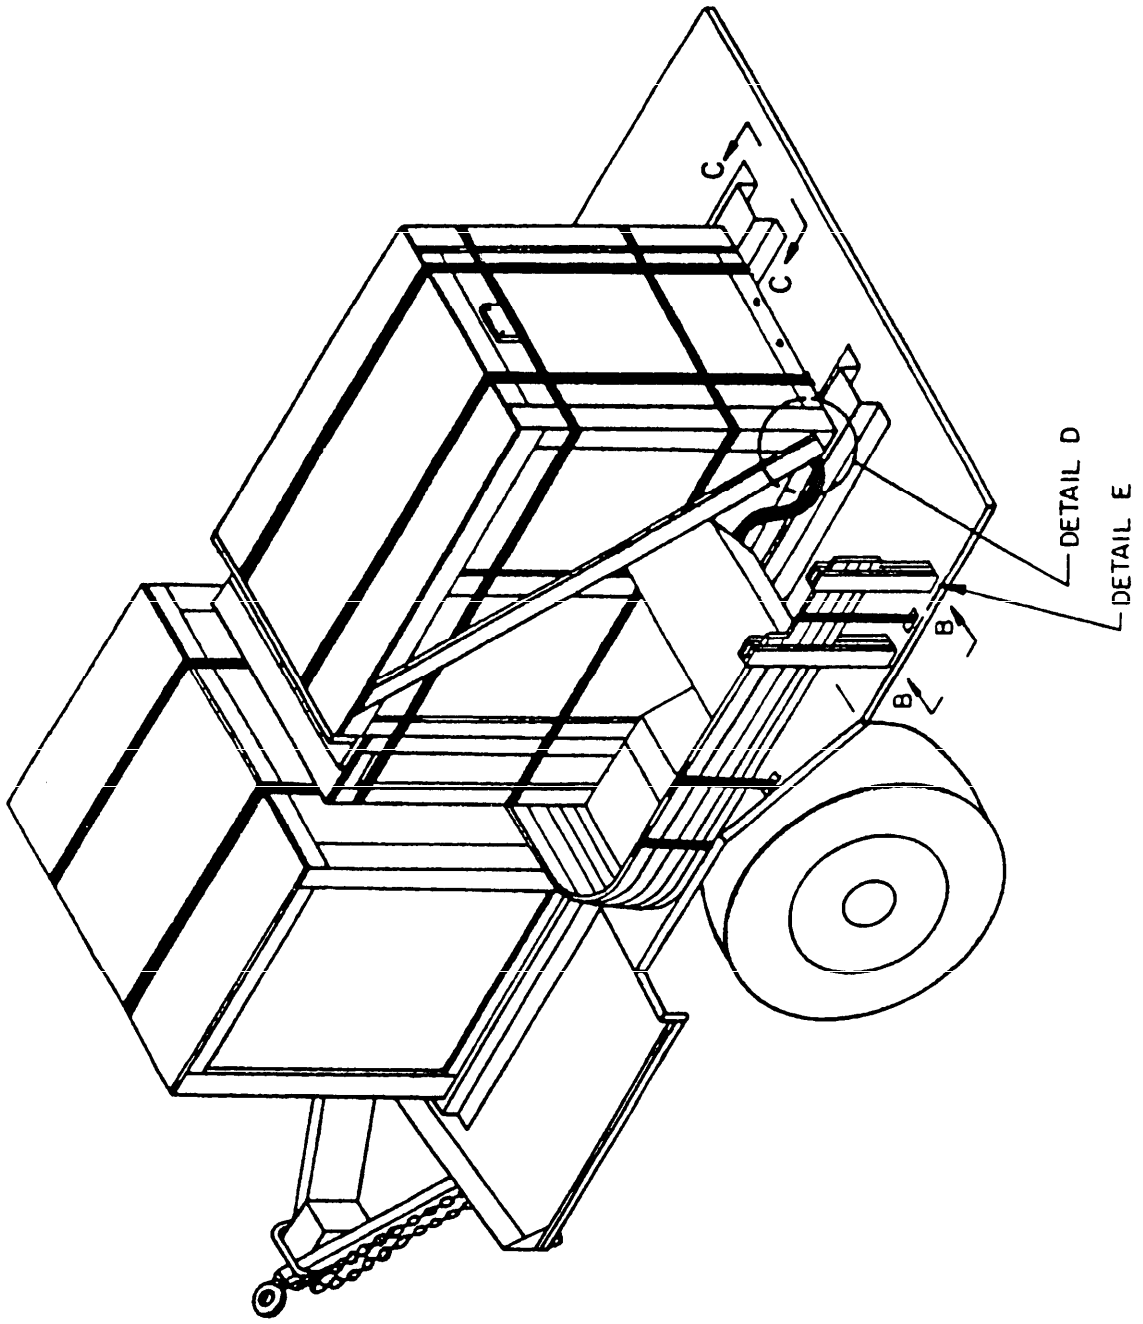


FIGURE 1. Packing configuration.

X-40968

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

NOTES:

1. TO PROVIDE ADEQUATE CLEARANCE, NO CLEATS SHALL BE APPLIED ON THE FORWARD FACE OF THE FORWARD GENERATOR BOX (1).
2. CORRUGATED PAPER (4) PLACED BETWEEN BOTTOM OF GENERATOR AND BARRIER MATERIAL (2).
3. FIBERBOARD PAD (3) PLACED BETWEEN BARRIER MATERIAL (2) AND WOOD WEDGE (6).
4. FIBERBOARD EDGE PROTECTORS (14) PLACED UNDER THE METAL STRAPPING (7) SECURING THE TOP BOWS.

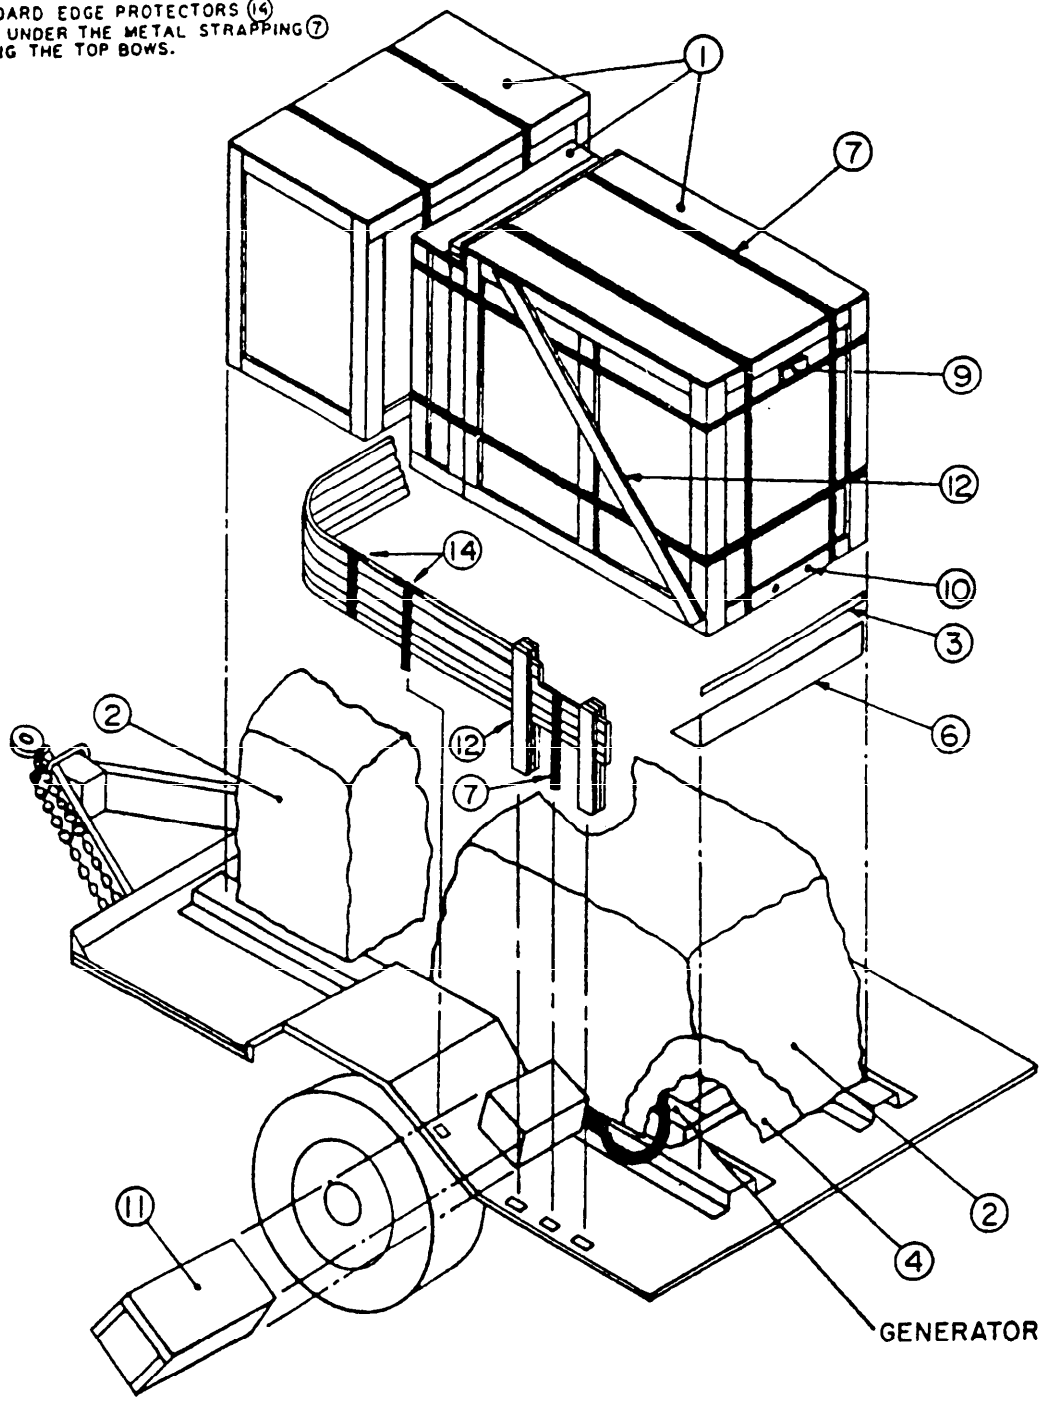


FIGURE 2. Preservation and packing assembly.

X-4097B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

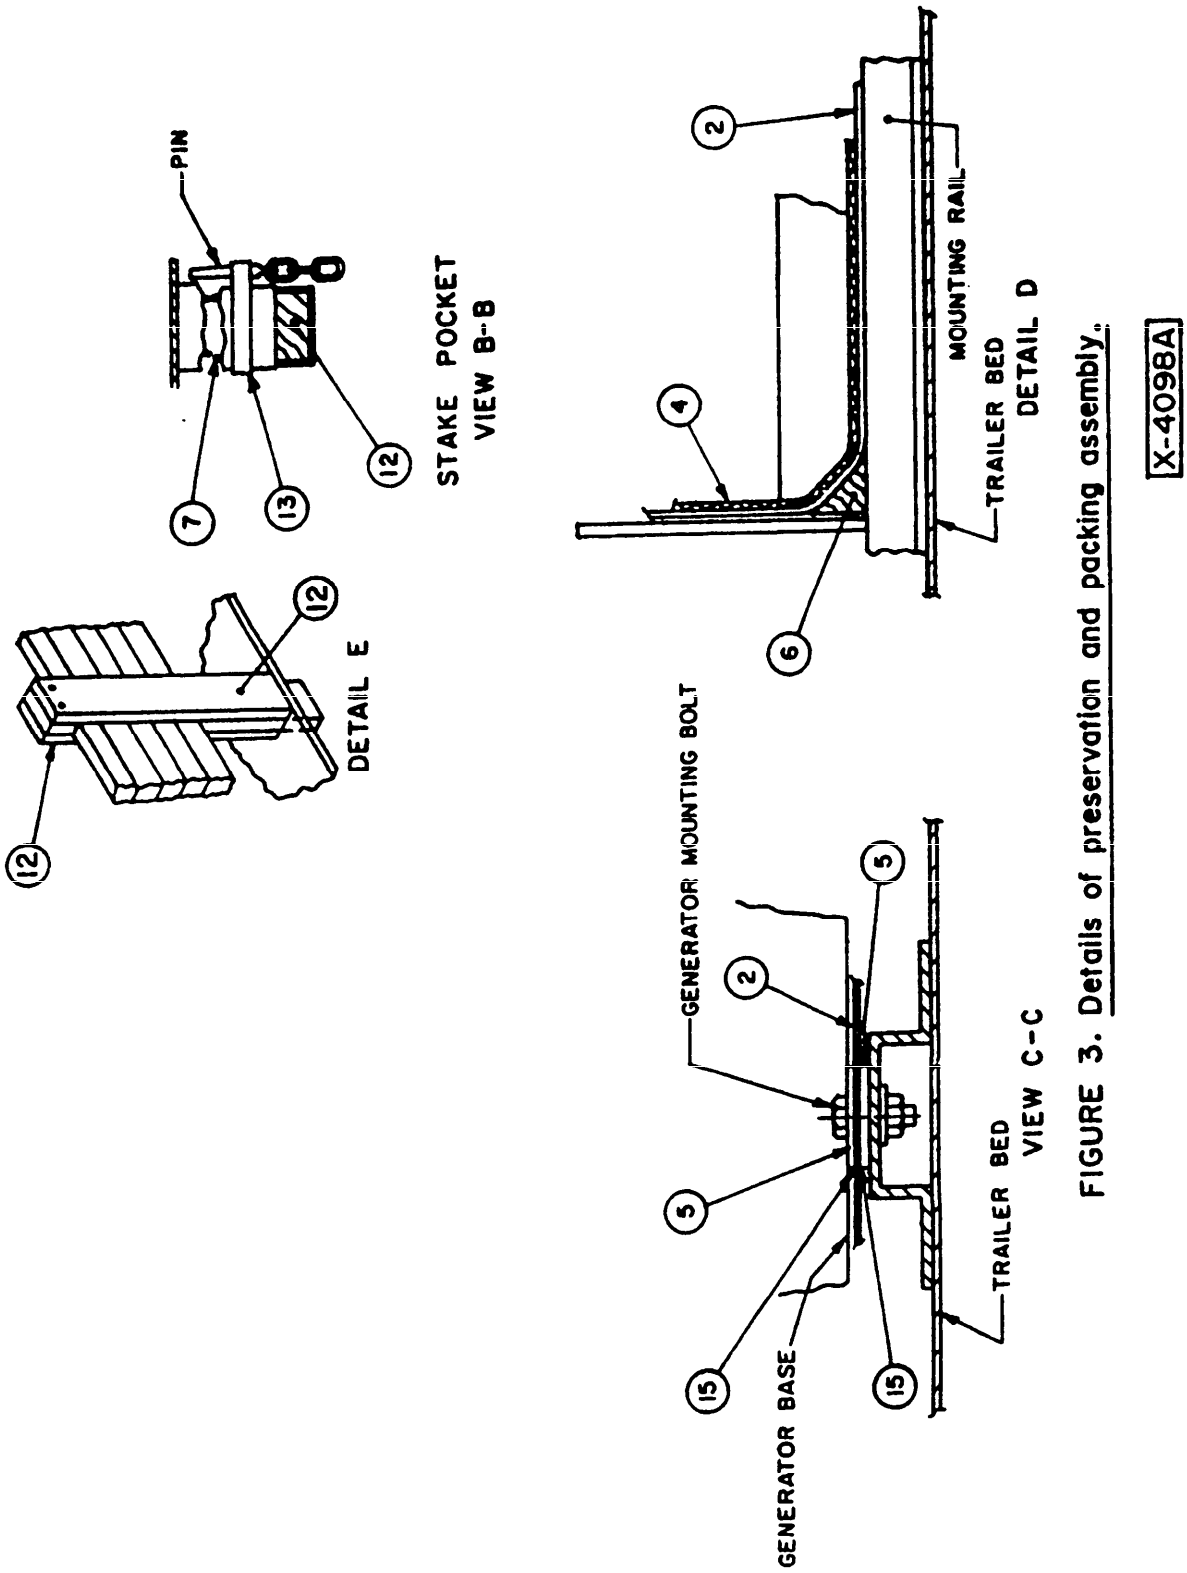


FIGURE 3. Details of preservation and packing assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.