

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/319693986>

Evaluation of the IoT LoRaWAN Solution for Distributed Measurement Applications

Article in IEEE Transactions on Instrumentation and Measurement · September 2017

DOI: 10.1109/TIM.2017.2746378

CITATIONS

31

READS

877

4 authors, including:



Mattia Rizzi

Università degli Studi di Brescia

24 PUBLICATIONS 183 CITATIONS

[SEE PROFILE](#)



P. Ferrari

Università degli Studi di Brescia

194 PUBLICATIONS 2,045 CITATIONS

[SEE PROFILE](#)



Emiliano Sisinni

Università degli Studi di Brescia

175 PUBLICATIONS 1,619 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



Industrial IoT [View project](#)



sensor interfaces [View project](#)

Evaluation of the IoT LoRaWAN solution for distributed measurement applications

Mattia Rizzi, Paolo Ferrari, Alessandra Flammini, Emiliano Sisinni

Dept. of Information Engineering

University of Brescia

Brescia, Italy

emiliano.sisinni@unibs.it

Abstract— Internet of Things (IoT) is based on data collection, where billions of sensors sample the real world; in other words, the IoT includes a giant distributed measurement system. A question still requiring an answer is: are the IoT technologies usable to enhance traditional measurement systems, since they have been developed for a very similar objective? In this paper the use of a LoRa technology, originally developed for IoT, is investigated with the aim of implementing distributed measurement systems. After the conclusion that LoRa (Long Range) and LoRaWAN (LoRa Wide Area Network) architectures show a good match with measurement systems, the paper focuses on the characterization of time related performance indicators that are important for distributed systems. The experimental results show: the capability of low cost transceiver to schedule the transmission of frames with a standard uncertainty less than 3 μ s; and an acceptable long term clock stability (Allan Deviation) of commercial available devices (nodes and packet forwarders) for application like smart metering, structural health monitoring and process industry.

Keywords—Wireless sensor networks, chirp spread spectrum, real time, industrial automation.

I. INTRODUCTION

The Internet of Things (IoT) is one of the key technologies of the present and the near future, as discussed in recent market surveys (e.g. consider the recent Gartner Symposium/ITxpo 2016, just to mention one) and scientific world [1]. Smart and connected things are transforming themselves from stand-alone devices to parts of collaborative systems. Clearly, this growth is also driven by the fact that smart objects are cheaper and more powerful than in the recent past.

Actually, the real basis of the IoT is the pervasive, continuous and efficient data collection. Data are stored, aggregated and analyzed by analytics (based on cloud computing) to extract more information [2][3]. In other words, the set of sensors, devices and storage systems, by which the IoT is composed of, is very similar to a giant distributed measurement systems.

Typically, a huge amount of information is collected from a very large number of smart devices with a low sampling rate (from few times per hour to few times per day) and stored in the cloud. Moreover, slow sampling allows the implementation of specialized transmission technologies oriented to scalability, like the wireless sensor networks [4]. To be precise, the availability of an ideal, IoT oriented, wireless communication technology for covering very large areas (thus reducing the number of base stations), with adequate transfer rate (up to tens of kbps), and with a long node lifetime (even if battery supplied), is still an open research. Smart cities, smart grids, pollution monitoring, transportation, remote health care application fields are waiting such kind of technology [5][6][7][8], and also the new Industry 4.0 may be heavily based on it [9][10][11].

Summarizing, the IoT systems are similar to a distributed measurement system (DMS) and IoT world is pushing new technologies. However, IoT systems have never been characterized in light of DMS requirements (as uncertainty and timestamps). This situation opens some questions for instrumentation and measurement scientists, for instance: are new IoT technologies usable to realize or replace specialized (private) distributed measurement systems? In other, more general, words: are the new IoT technologies able to provide satisfactory measurement performance?

In this paper, Low Power Wide Area Networks (LPWAN) are considered as a viable solution for large scale distributed measurement systems. In particular, the very new wireless technology LoRaWAN technology is evaluated, which is the open standard LPWAN than can boast the largest number of already deployed pilot studies. It is based on LoRa radios from Semtech Corporation, is considered. Originally conceived for IoT slow sampling rate, long distance communication, it has good scalability, cellular architecture, and central coordination function. This paper investigates the use of LoRa from the perspective of distributed measurement systems and applications. Then, the paper tries for the first time (according to the best authors' knowledge) to experimentally evaluate physical and data link layers capability of LoRaWAN, mainly considering time related performance indicators.

The paper is structured as follows. In the Section II, the paper objective is presented and key aspects of the LoRaWAN proposal are discussed against the more general concept of distributed measurement system. In Section III some details of LoRaWAN

technology are given in order to highlight the fundamental limits. In Section IV, the normative constraints for the use of this wireless technology are discussed. Finally, in Section V, the experimental setup is described and the experiment results are presented.

II. DISTRIBUTED MEASUREMENT SYSTEMS AND IOT

A distributed measurement system (DMS) allows to collect measurements from several sensors/transducers deployed on the field connected by means of a (digital) network for further processing and visualization [12][13]. In particular, DMS offer great benefits over traditional approaches when several (possibly hard-to-reach) measuring points are distributed on a large area. Industrial applications are among first adopters of such an approach, since the introduction of fieldbuses [XX]. More recently, the smart grid concept disrupts the power distribution leveraging on DMS for controlling power flows [XX]. Obviously, despite all these application domains share a common arrangement, communication requirements can vary greatly depending on the considered use case. Several figure of merits (FoM) exist for comparing DMS performance. Since a DMS is involved with time series collection, time-related FoMs as refresh time, latency and required time synchronization accuracy are particularly meaningful. Interesting to note, other FoM as the typical frame size or the number of nodes per access point affect or are depending on time-related FoMs (e.g., the throughput). For sake of completeness, TABLE I has been completed starting from data available in literature [14].

TABLE I MAIN REQUIREMENTS OF TYPICAL DISTRIBUTED MEASUREMENT SYSTEMS

Application	Update time (s)	Latency (s)	Sync err. (s)	Data Size (B)	# Nodes
Industrial Automation (Factory)	<0.1	<0.01	<10 ⁻⁴	<100	10 ²
Industrial Automation (Process)	<60s	<1	<0.01	<100	10 ³
Building Automation (e.g. HVAC)	<600	<60	<1	<1k	10 ²
Home Automation (e.g. lighting)	Event based	<60	<10 ⁻⁴	<100	10 ²
Smart metering (Electricity)	<600	<10	<1	100	10 ⁶
Smart metering (Gas)	4/day	<3600	<60	100	10 ⁶
Smart Grid (PMU)	<0.01	<0.01	<10 ⁻⁶	<200	10 ²
Smart Grid (EV fleet)	4/day	<15	<60	<300	10 ²

Although IoT has different goals, as increasing the smartness of physical objects for improving their values and for streamlining activities and processes, it is evident that IoT shares several features with DMS. Very roughly speaking, IoT aims at conveying information from “smart things” toward the cloud, just the same way a DMS collect measurements from sensors toward the data sink. Consequently, even if application scenarios and requirements may be very dissimilar, some works available in literature [15][16] already tried to merge the two worlds. The fundamental question to answer is “if is it possible to design an IoT infrastructure that can support different and concurrent DMS applications?”. One possible solution is to increase the cloud complexity in order to automatically collect data coming from many (native) protocols of regular sensor networks. Alternatively, new communication protocols proposed for regular IoT applications can be tested to verify their applicability to distributed measurements systems.

In this work, we addressed the latter approach, evaluating the usability of the LoRaWAN solution as the wireless backhaul of IoT-like measurements solutions. In the next section, the LoRaWAN architecture is described in order to check if fits or not with typical DMS arrangement. In Section IV, additional details about physical (PHY) and data link (DL) layers are provided in order to state to what extent requirements of some DMS applications (as those reported in TABLE I) are satisfied. Indeed, the PHY affects individual link characteristics, while the DL determines the whole network behavior.

III. THE LORA/LORAWAN SOLUTION

Formally, LoRaWAN is a member of the LPWAN family, i.e. those wide area network wireless communications that are designed to cover large areas minimizing power consumption but offering a relatively small bit rate. LoRaWAN exploits the cellular architecture typically adopted by IoT solutions. It is useful to highlight that the standard only covers the Data Link (DL) layer above the physical layer (PHY), which relies on proprietary transceivers developed by Semtech. Indeed, LoRaWAN does not provide a network layer, being based on a star topology. Regarding the application layer, the specs do not define it at all.

A. The LoRaWAN architecture

In the typical LPWAN usage, nodes on the field wake up after an event is occurred and try to transmit a message toward the base station. Indeed, LoRaWAN privileges the so called uplink transmission, that is from the node toward the end-user (which the standard says are "... expected to be the predominant traffic..."). In order to keep the wireless infrastructure very simple, the base stations only include the so called "packet forwarder" without providing roaming, but simply collecting LoRaWAN messages on the air and tunneling them into the network backbone. Formally speaking, the base station is a "gateway", which tunnels LoRaWAN messages into the backbone network and vice versa. It must be underlined that the gateway does not analyze the payload of incoming messages; node identification and join procedures are actually carried out by servers on the backbone, as better described in the following.

The protocol stack of the backbone is out of the LoRaWAN scope. In fact, most of commercially available solutions follow the Semtech Application Notes, whose architecture is graphically depicted in Fig. 1. In such a case, the backbone is the Internet or at least an Intranet. The gateway forwards the LoRaWAN message toward one or more Network Server(s). The Network Server authenticates the received message and further forwards the user payload to a single (or several) Application Server(s). The Application Server is in charge of admitting nodes to the network and takes care of encrypting/decrypting user data sent/received to/from the end device. Finally, the Application Server forwards node message to a Customer Server, that actually implements the final user application. Additionally, a Network Controller, whose aim is collecting reports about the network status and can modify the LoRaWAN network accordingly, e.g. changing the data rate supported by end devices (implementing an Adaptive Data Rate scheme), can complement the Network Server(s).

For security reasons, all the communications have multiple levels of message cyphering and signing. Each transaction needs two 128-bit symmetric keys, known as the AppSKey and the NwkSKey (i.e. Application and Network Session Keys). The NwkSKey provides data integrity between the end-device and the network server. The AppSKey provides data confidentiality between the end-device and the application "behind" the Network Server. Two different joining mechanism are provided, the Over-the-Air Activation (OTAA, based on globally unique node identifier and over the air message handshaking) and Activation By Personalization (ABP, with session keys stored at production time).

The hierarchical organization helps in creating innovative business models, allowing to easily separate the owners of the hardware from the owners of the infrastructure and the owners of the information collected by the nodes (often referred as motes). As reported in [17], application scenarios may range from millions of nodes when transaction rate is one per day, to thousands of nodes when the transaction rate is on the order of tens of seconds.

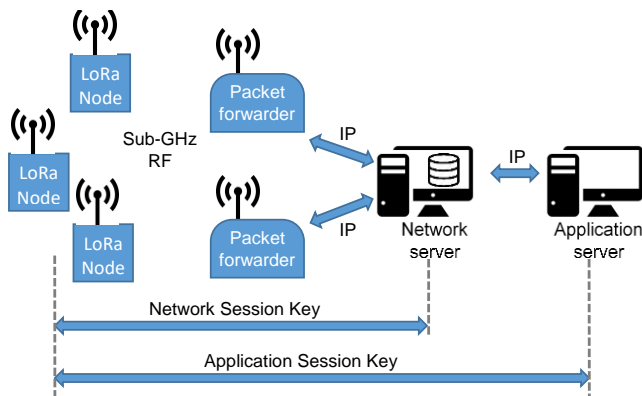


Fig. 1. Overview of the LoRaWAN hierarchical architecture, according to the Semtech proposal.

LoRaWAN has also some care about the time relation between transmissions: the packet forwarder has a free running counter (with a 1 μ s resolution) in order to timestamp every incoming uplink message. Regarding downlinks, the Network Server schedules their transmissions sending to the packet forwarder information about when the transmission should take place referring to the packet forwarder free running timer

Finally, the LoRaWAN application layer (e.g. running on Lorient, IBM Bluemix, Amazon AWS, just to mention few platforms) contain useful functions for measurement services, like data analysis, long term storage, and easy visualizations. Cloud services and effective (customer oriented) dashboards may be the key ways to obtain the highest impact on the end-user of the measurement results. For example, the availability of multiple Customer Servers allows to apply different measurement algorithms or different reporting/visualization interfaces to different users.

B. LoRaWAN: State of the art

LoRa is having a good success and many papers are available about it. In the following a collection of the works more related to the distributed measurement system applications is presented.

The integration of LoRaWAN into the IoT is sponsored by the LoRa alliance, and some open implementations of Network Server are available [18]. Many sensors are available as well and LoRaWAN ecosystem is constantly growing as explained in [19]. A rather complete analysis of the scalability of LoRaWAN networks is given in [20]. The authors, by means of analytic and simulation-based approach, deeply explore the multiple dimensions of the LoRa network configuration. The number of sensors deployed in the field greatly depends on the chosen spreading factor (SF, described in the next section) and on the transmission rate given in packets/day. For instance, millions of sensors are possible if they transmits just one packer per day.

In [21] the LoRaWAN PHY is evaluated for safety application. Besides the conclusion about the suitability of this modulation technique for such application, the work investigates the use of the 2.4 GHz frequency band. In these conditions, chirp modulated signal can pass through few concrete walls and operate immersed in water. Open space range is confirmed greater than 9 km.

A LoRaWAN network has been deployed in the city of Rennes in [22] evaluating typical communication parameters as the Packet Error Rate (PER) the Received Signal Strength Indicator (RSSI) and Signal to Noise ratio (SNR); the main result is the experimental consideration about an average PER of 40% over a such wide area. Other experiments are reported in [23] confirming this outcome: the PER is depending on the SF, and in within a radius of 3.5 km, the average PER is lower than 50% only for the SF12. For SF7 the maximum range seems to be 2.3 km.

A simulation of coexistence of LoRaWAN with other IoT oriented wireless systems is carried out in [24]. LoRaWAN shows an higher bandwidth and a good margin against interference. Different SFs are confirmed to be orthogonal and can be received simultaneously unless the power of the interfering SF is 18dB greater than the desired SF. In [25] LoRaWAN has been evaluated in mobile situations (i.e. when the nodes are moving during transmission): the results highlight that slow fading can affect long LoRa messages (higher SF) when the node speed is higher than 40 km/h.

Finally, LoRaWAN PHY has also been investigated for localization in [26]. The benefits of Chirp Spread Spectrum (CSS) used in LoRAWAN radios in this field are limited, due to the low bandwidth, and cannot be compared with results achieved by Ultra Wide Band systems [27].

C. Final remark

In order to decide if LoRaWAN is suitable for, at least, certain distributed measurement applications, it has to be compared with the DMS requirements of TABLE I. From the description in Section III.A, it emerges that some features of LoRaWAN, as the network architecture, the frame size, the hierarchical structure, and the application layer capabilities well fit many distributed measurement applications. In these cases, the scenario where several “instruments” sense variable of interest, transmit data towards one (or more) processing site(s), and export information to the final users, can quickly and effectively be implemented. Additionally, the presence in the LoRaWAN standard of “uplink timestamping” feature is of great importance, but its accuracy is not known.: as emerged from the Section III.B, timing analysis is missing in literature.

The most important goal of this paper is the evaluation of LoRa and LoRaWAN timing performance (described in Section IV) and the comparison of the obtained result with the requirement of TABLE I (carried out in Section VII).

IV. THE LORAWAN PHYSICAL AND DATA LINK LAYERS

This section complements the previous overview furnishing some details about the lower part of the protocol stack, which determines communication performance. In particular, the physical and data link layers actually limit the time related performance, whose evaluation is the main objective of this paper. Being more precise: the PHY bounds raw data rate and it must be compliant with national and international regulations; the DL defines network capacity and coexistence strategies.

A. LoRa: the physical layer

The physical layer is an example of CSS modulation, operating in unlicensed bands. According to CSS, each symbol to be transmitted is “spread” across the transmitting channel by means of a linear frequency modulated signal having a fixed duration. Thus, it can be considered an example of a Spread Spectrum modulation that uses good autocorrelation properties of chirps, instead of well-known codes (e.g. gold codes). The tradeoff is between the larger time/frequency occupation with respect to improved robustness against interferences.

The LoRa solution assigns a specific instantaneous frequency trajectory to each symbol. In particular, a sharp edge appears in the frequency trajectory due to time wrapping of a reference chirp. Time (and frequency) shifts occur in discrete step, so that $M=2^{SF}$ possible edge locations exist, each one representing a symbol. Differently said, the tunable Spreading Factor (SF) represents the number of bits encoded in a single symbol. At the receiver the signal is down-mixed to revert it to the baseband, optimally filtered (i.e. unchirped by means of a multiplication by a locally generated reference chirp), and then the actual symbol is estimated in the frequency domain.

When the LoRa radio is used in a LoRaWAN network, chirp bandwidths are in the range $B \in [125, 250]$ kHz, whereas the spreading factor can vary in the range $SF \in [7..12]$. Additionally, LoRa imposes a chirp duration $T_C = 2^{SF}/B$ (i.e. B is not affected by the SF). Consequently, the raw bit rate R_b at the PHY level can be computed as in (1) and can vary from about 180 bps ($B = 125$ kHz,

CR = 4/8 and SF = 12) to about 11 kbps (B = 250 kHz, CR=4/5 and SF = 7). The CR term takes into account possible forward error correction (FEC) scheme applied for increase noise immunity. In particular, the FEC is applied to every nibble as an Hamming code with coding rate CR = N/M, where M = {5,...,8} is the codeword length and N=4 is the data block length.

$$R_b = SF \cdot \frac{B}{2^{SF}} \cdot CR \quad (1)$$

It has to be highlighted that each SF is a sort of pseudo-orthogonal code. Consequently, frames using SF=i and SF=j can be correctly decoded even when they overlap in time and frequency, as long as i ≠ j and the received packet's Signal to Interference plus Noise Ratio (SINR) is above the *isolation* threshold (a function of i and j). Additionally, the higher the SF the more robust the coding, so that a possible Adaptive Data Rate (ADR) mechanism results in a tradeoff between the actual SINR and the time-on-air.

The LoRa frame (see Fig. 2) starts with a preamble made of eight consecutive unshifted reference chirps, used for synchronizing the receiver with the transmitter. This preamble is followed by a Start of Frame Delimiter (SFD) that occupies 4.25 symbols. The SFD also encodes a so called "sync word" which is used to distinguish between public/private LoRaWAN network (sync word = 0x34 or 0x12, respectively). Semtech does not disclose the details of the 8-symbol long PHY header (sent using SF2, CR = 4/8 and followed by its own CRC field); probably it includes information about the payload length and encoding strategy. Other than the FEC, data whitening; interleaving and Gray mapping of each symbol can be applied. Finally, the trailer contains the PHY-payload CRC, that is used for uplinks but it is typically not present in downlink frames. In Fig. 3 are shown the initial parts of two frames transmitted using SF7 and SF10, respectively. The RF signal has been experimentally acquired by means of the mixed domain oscilloscope MDO4014C from Tektronix. This oscilloscope allows to simultaneously work both in the time and frequency domain and it has been exploited to track the signal instantaneous frequency trajectory (brown signal). It is possible to identify the 8-symbol long preamble and the 4.25-symbol long SFD. It is also evident that BW is not affected by SF, whereas the T_C increases with the SF.

The overall message time-on-air can be split into a fixed part (preamble, SFD and PHY-header) and a variable duration part depending on the actual payload T_{OA}=T_{fixed}+T_{variable}. The fixed part is poorly documented, but T_{fixed} can be inferred from the SX1272 transceiver datasheet as in (2). An additional overhead O is added for SF ∈ {11,12} (i.e. O = 1 and symbol duration is longer to counteract clock drift occurring in long frame at low data rates).

$$T_{fixed} = \left[20.25 + \left(\frac{28 - 4SF}{SF - 2O} \right) \frac{M}{N} \right] T_c \quad (2)$$

The variable part duration T_{variable} is computed as in (3), where L is the PHY-payload length in B and 16 is the CRC length in bits (if present).

$$T_{variable} = \left[\left(\frac{8L + 16}{SF - 2O} \right) \frac{M}{N} \right] T_c \quad (3)$$

According to the LoRaWAN specs, the PHY layer payload includes the MAC Header (MHDR = 1B long), the MAC payload and the Message Integrity Code (MIC = 4B long). When the maximum useful payload is considered, the overall time-on-air ranges from T_{OA} ≈ 0.2 s (when SF = 7, B = 250 kHz, O = 0 and CR=4/5 is used) to T_{OA} ≈ 4.0 s (when SF = 12, B = 125 kHz, O = 1 and CR=4/8 is used).



Fig. 2. The LoRaWAN message format. Field lengths of the PHY payload is expressed in Byte.

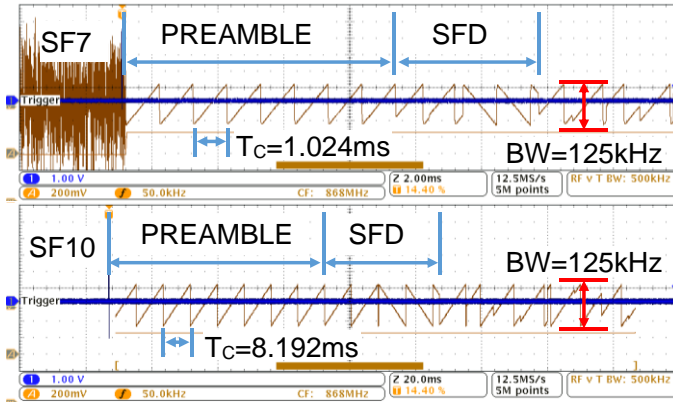


Fig. 3. Chirp modulation of LoRa: Beginning of the PHY Headers of two messages sent with different SFs.

In TABLE II are resumed data provided by the radio manufacturer [28] for white noise resiliency regarding a tolerated Packet Error Rate $PER = 10\%$ when a 20B-long packet encoded using $CR=4/5$ is transmitted. Regarding intra-system collisions, when two packets having the same SF hit the antenna simultaneously, one needs to be at least 6 dB higher than the other in order to be correctly received. The demodulation is a linear process and signals having similar power are indiscernible. Conversely, for a collision with any other SF there is a positive isolation value, which means that the packet can “survive” another LoRa signal having bigger amplitude but different SF. In particular, in [29] is reported that per each SF increment, insulation is improved by 3 dB.

TABLE II LORa PHY PERFORMANCE.

SF	7	8	9
Symbol length	1ms	2ms	4ms
Required SINR	-9.5dB	-12dB	-14.5dB
Sensitivity (dBm)	< -130	< -130	< -130

B. The data link layer

Currently, available LoRa specifications exploit the ALOHA mechanism for accessing the medium, despite “Listen Before Talk” techniques are theoretically allowed. In particular, considering the pseudo-orthogonality of different SFs, the overall network capacity results from the superposition of as many independent ALOHA-based networks as the SFs are. A lot of papers are available in literature describing the maximum permitted throughput by pure ALOHA, which is $0.5/e$ frames per frame time (i.e. no more than 18% of time is spent for successful transmissions) per independent SF [17]. However, it must be highlighted that the previous result is further limited by duty-cycle restrictions, which are one of the technique the standard adopts for satisfying unlicensed bands limitations. Due to their importance, such normative constraints are briefly discussed in the next section.

The MAC layer payload is further divided into the end device address (ADDR = 4B long), the frame control and frame counter (FCTRL and FCNT, 1B and 2B long, respectively), an optional FOPTS field (up to 15B long), the application endpoint (FPort = 1B long) and the variable length frame payload (FRMPayload). The MAC ancillary fields occupy from 9 B to 24 B depending on the FOpt field size. In order to keep time-on-air short, minimizing the effect of clock drift, the usable MAC level payload length may range from [227,242] B at SF7 down to [36,51] B at SF12, depending on the size of FOpt field. If needed, message can be configured as “confirmed” requiring that an acknowledge is sent for finalizing the transaction.

V. LORA AND NORMATIVE CONSTRAINTS

The previous section showed that the LoRaWAN solution performance is compatible with the targeted application scenario, i.e. the implementation of distributed measurement systems. However, limitations deriving from regional norms are not considered and can potentially be the most important affecting parameter. Indeed, the LoRa radios can operate into different unlicensed regions of the spectrum which are typically only regulated in terms of maximum transmitting power and duty-cycle (i.e the ratio of the total transmitter ‘on’-time to an observation period). For example, in Europe LoRa can operate in the 868 MHz sub-bands normed by the EN300220-1, in the bands and sub-bands specified in the ERC Recommendation 70-03. The maximum output power ranges from +14dBm to +27dBm, with a duty-cycle, d , from 10% to 0.1% depending on frequency sub-band (see TABLE III). Additional fairness of the transmitter can be obtained using: “Listen Before Talk” (LBT) protocols; and Adaptivity and Frequency Agility (AFA) (both of them optional for LoRa device).

TABLE III LORAWAN FREQUENCY PLAN IN AGREEMENT WITH ERC RECOMMENDATION 70-03 (AS FEBRUARY 2017)

Sub-band	Frequency Range [MHz]	$P_{MAX,ERP}$ [dBm]	Spectrum Access	LoRaWAN Bandwidth [kHz]
h1.4	868.00 - 868.60	14	LBT+AFA $d \leq 1\%$	600
h1.5	868.70 - 869.20	14	LBT+AFA $d \leq 0.1\%$	500
h1.6	869.40 - 869.65	27	LBT+AFA $d \leq 10\%$	250
h1.7	869.70 - 870.00	14	LBT+AFA $d \leq 1\%$	300
h1.7	869.70 - 870.00	7	$d \leq 100\%$	300

As a concluding remark, the availability of 42 virtual channels (obtained from 6 possible SFs multiplied by 7 physical frequency channels) results in about $3.6 \cdot 10^6$ s per day available for transmissions. If few messages per node per day are enough, the overall number of nodes is in the million range. Conversely, if periodic high-speed refresh time is needed, the number of nodes decreases to few thousands, as shown in [20]. In particular, the synchronization of transmission instants can ensure a refresh time of 60 s for more than 6000 nodes [30].

VI. EXPERIMENTAL RESULTS

The evaluation of LoRaWAN has been carried out considering the most important characteristics for the implementation of a distributed measurement system. Different setups have been arranged in order to evaluate transmission, reception and timestamping uncertainties.

A. Components of the hardware setup

The following components and devices were used:

- One Agilent 53230A Time interval Counter (TIC), with internal Ovenized Crystal Oscillator (OCXO) time-base option
- One Agilent 33220A function generator, synchronized to the 53230A through the “Ext. Ref. In” connector;
- Three SX1272 mbed board, mounting the Semtech’s SX1272 LoRa modem that can transmit on a single channel per message;
- Three STM32 Nucleo boards;
- One Multitech LoRa packet forwarder. The Multitech packet forwarder uses a SX1301 (from Semtech) that is able to simultaneously decode up to 10 channels (1 for a FSK communication and the remaining 9 for LoRa messages);
- One personal computer (PC) connected to the packet forwarder through Ethernet connectivity.

The 53230A acts as the time (and frequency) reference for all the setups described in the following. It has an Internal reference output (10 MHz) used to syntonize the 33220A. A TIC measures the time interval of two channels, namely START and STOP, using its internal time-base. The 53230A has a single-shot resolution below 20 ps (i.e. resulting into an equivalent Allan Deviation of $ADEV(\tau) = 2 \cdot 10^{-11}/\tau$). The internal time-base (based on a OCXO) has a short-term stability (according to the manufacturer specifications) equal to $ADEV(\tau = 1s) = 10^{-11}$ and a linear aging of ± 0.3 ppb in 24 hours. Accordingly, since measurements in SETUP I and SETUP II have a limited duration (i.e. less than one second), the measurable ADEV is always dominated by the TIC finite resolution.

The 33220A is locked to the TIC’s time-base. The function generator is used to provide a 1-pulse-per-second (1-PPS) synchronization signal to the SX1272 boards. The ability of the function generator to modify the shape of the 1 PPS signal (and in particular the duty-cycle) is used to simulate scheduled transactions (e.g. for ensuring real-time requirements of distributed measurements systems).

The mbed SX1272 board has an Arduino shield connector, used to communicate with a host board. The connector has a number of communication lines. Notably, one of these lines is used for the signaling of the completed transmission (TX) or reception (RX) of LoRa frames (RX_DONE or TX_DONE, depending on the context). This line is used to characterize the LoRa modem without the influence of the host board latencies. The SX1272 transceiver has a clock signal output directly derived from the crystal oscillator used by the internal PLL and RF stage. By means of the 53320A, the ADEV of such a reference clock has been evaluated and shown in Fig. 11. Unfortunately, the mbed SX1272 board does not allow the exploitation of this signal as clock for the host board, unless heavy hardware modifications.

The host board is a STM32 Nucleo board, used to send and receive frame to/from the mbed SX1272 board. The Nucleo board sends a frame when a rising edge is detected on one of its I/O lines (external trigger) using the highest interrupt priority. The firmware has been designed to introduce a latency as little as possible and to reduce non-deterministic delays. In order to achieve those characteristics, the firmware pre-load in memory the frame to be send before the external trigger. The data is sent to the SX1272

using the STM32's LoRa driver. The driver has been inspected to avoid any delay statements, which could introduce latency fluctuations due to the instability of the STM32 internal oscillator.

B. Characterization of frame transmission uncertainty

The very first experiment deals with the characterization of the time related uncertainty of the test setup itself. In particular, the determinism of the transmission instant due to the operation of the host board and of the SX1272 is evaluated. This is important for obtainable latency and update time evaluation and for possible suitability of synchronization algorithms as well.

Fig. 4 shows the measurement setup (SETUP I). The 1 PPS signal is used to trigger the transmission of a LoRa frame. The TIC is used to measure and record the time interval (latency) between the TX trigger instant and the "TX_DONE" interrupt generated by the SX1272. The measurement has been repeated for 1000 frames with 64B payload and SF equal to 7 and 10, respectively.

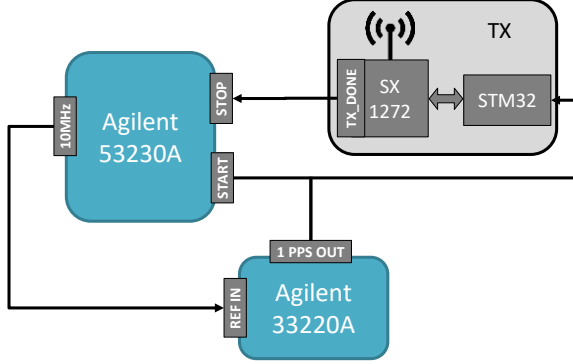


Fig. 4. Measurement setup for the characterization of the transmissison uncertainty (SETUP I).

Fig. 5 and TABLE IV show the measurement results. Notably, the latency strictly depends on the symbol time of the selected SF. The measured latency has a randomly spike of about $8 \mu\text{s}$. The spike amplitude is not affected by the SF and it's probably related to the internal processing of SX1272. Since at the highest rate (SF = 7) the discrete position of the instantaneous frequency jump inside the chirp symbol has a resolution of $T_C/2^{SF} \cong 8 \mu\text{s}$, the achievable level of uncertainty is close to the limit of the LoRa modulation.

TABLE IV shows the statistics of the measured latency, with a standard deviation of about $1.4 \mu\text{s}$ for both SFs. The distribution of the measurements is not Gaussian due to the occasional spike already mentioned. As previously discussed, the uncertainty measured using SETUP I represents the uncertainty of the transmission of a LoRa frame respect to an external trigger signal. In an application involving a device distributing a "Beacon" (i.e. frequency distribution), the measured uncertainty would be a limiting factor.

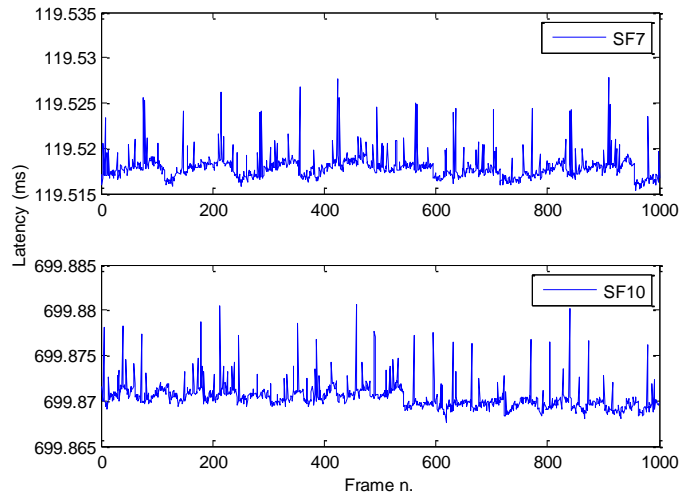


Fig. 5. Latency measurements between TX trigger instant and the "TX_DONE" interrupt generated by the SX1272

Next, a characterization of a peer-to-peer transmission has been done. The peer-to-peer transmission involves the use of two SX1272 boards, one configured for transmission and the other one for reception, as depicted in Fig. 6. The TIC counter is used to

measure the time interval between the signal of “TX_DONE” and of the “RX_DONE” of the boards (SETUP II-a); and the time interval between the TX trigger instant and the “RX_DONE” of the RX board (SETUP II-b).

The measurement has been carried out in a controlled environment without other external interfering nodes. The distance between nodes is of 3 meter. The correct transmission and reception of 1000 frames having a payload of 64B has been check for SF equal to 7 and 10, respectively.

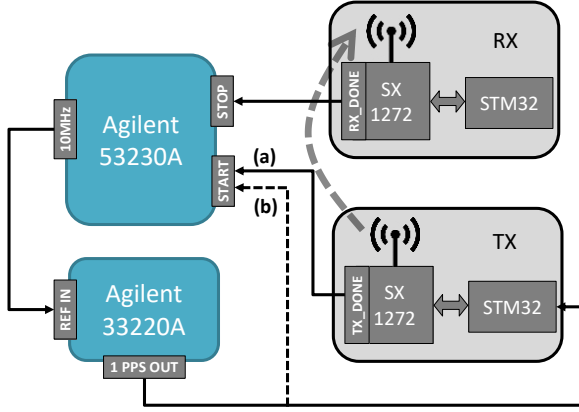


Fig. 6. Measurement setup for the characterization of the transmissison uncertainty, SETUP II-a (solid line) and II-b (dotted line).

TABLE IV shows the results of the SETUP II measurements for a number of factors. Regarding the quality of the link, the PER for both SFs has been assessed to be below 0.1% (no frame lost in the experiment). The SX1272 provides an estimation of the RSSI and of the SNR. The reported data confirms the process gain of LoRa modulation: although the RSSI is the same for both SFs (about -41 dBm), the SNR of the modem has an increase of 6 dB.

The time measurements results of SETUP II-a show the uncertainty in the estimation of difference between the departure and arrival time done by the SX1272. The measured standard uncertainty is 2.3 μ s (i.e. an extended uncertainty of 7 μ s with a coverage factor of 3), as shown in TABLE IV. Fig. 7 shows the experimental data of SETUP II-a (for SF7 and SF10) as a function of frame number. This setup is useful to characterize the performance of a two-way synchronization algorithm (e.g. IEEE1588), where each node measures the time-interval between the transmission and reception of the synchronization frames (e.g. using “TX_DONE” and “RX_DONE” signals).

The results of SETUP II-b combine the effects of SETUP I and SETUP II-a. Indeed, the measured uncertainty is higher because contains also the effect of the trigger transmission uncertainty measured in SETUP I.

For all the setups, TABLE IV reports the Allan Deviation (ADEV) value, as well. The measured ADEV has a prevalent White Phase Modulation (PM) noise type, having a $1/\tau$ slope. The measured ADEV values for τ values shorter than 100 s are very high compared to a typical crystal oscillator (XO) performance. For instance, at $\tau = 1$ s, the ADEV of the mbed SX1272 XO is three order of magnitude better than the measurements reported in TABLE IV for SETUP II-a (see Fig. 11, referred to an observation time of 20000 s). Accordingly, it is possible to state that the short-term noise is mainly dominated by the LoRa transceiver timestamping quality. The choice of the clock correction rate must take into account the ADEV performance of both the node XO and the quality of the time-measurement from the transceiver. The former depends on the XO quality and by the environmental conditions, the latter are reported in TABLE IV. Any synchronization algorithm follows the stability of the reference clock. Thus, referring to results in Fig. 11, a fast clock correction rate (e.g. 1 Hz) would be detrimental for the node’s clock performance, while synchronizing about every 500 s may result in an improvement of the overall stability performance.

C. Uplink test

The characterization of the uplink involves the characterization of the packet forwarder. The analysis of the packet forwarder deals with two aspects: uncertainty in the timestamping of the incoming packets, and uncertainty of the transmission instants when scheduled transmission is used. Only the former is treated in this section, since falls in the uplink characterization; the latter will be characterized on the next section (Downlink test). The authors stress that it is not possible to derive fixed time relationship exploiting the hardware, as it has done with previous setups.

The characterization of the timestamping accuracy has been carried out using the experimental SETUP III, depicted in Fig. 8. The adopted approach involves the use of one SX1272 periodically transmitting a frame, with a rate of 1 frame per second. The packet forwarder timestamps the incoming frames with a counter having microsecond resolution. Since the 1 PPS signal is locked to the TIC’s OCXO (which is the experimental time-base reference), the packet forwarder timestamps are affected by two source of uncertainty: timestamping unit performance; and internal time-base fluctuations.

TABLE IV MEASUREMENTS RESULTS FOR SETUP I AND SETUP II.

SETUP & SF	Time interval			PER	RX data	
	Mean (ms)	STD (μ s)	ADEV		RSSI (dBm)	SNR (dB)
I/SF7	119	1.4	$2E-6/\tau$	N/A	N/A	N/A
I/SF10	700	1.4	$2E-6/\tau$	N/A	N/A	N/A
II-a/SF7	0.6	2.3	$4E-6/\tau$	$< 0.1\%$	-42	28
II-a/SF10	6.0	2.3	$4E-6/\tau$	$< 0.1\%$	-41	34
II-b/SF7	120	2.9	$5E-6/\tau$	$< 0.1\%$	-41	28
II-b/SF10	706	2.8	$5E-6/\tau$	$< 0.1\%$	-41	34

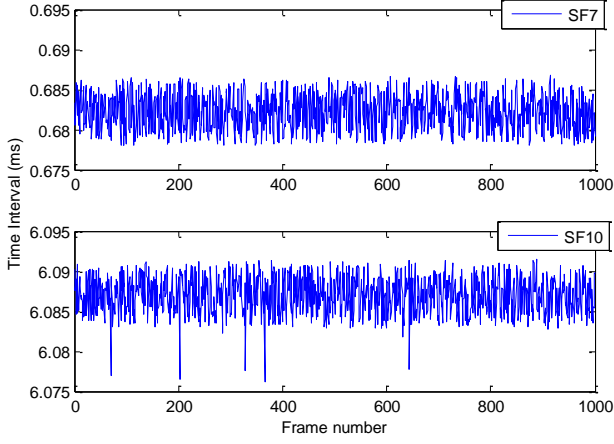


Fig. 7. Experimental data of SETUP II-a for SF7 and SF10. The measured time-interval is plotted as a function of the frame number. Each frame was sent every 1 second.

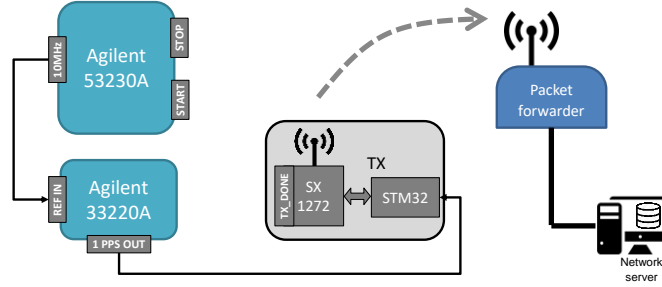


Fig. 8. Measurement setup for the characterization of the timestamping uncertainty of the packet forwarder (SETUP III).

The timestamping accuracy typically depends on short-term noise as white noise and limited resolution. The packet forwarder internal time-base is based on a crystal oscillator, which typically have a good short-term stability but a poor long-term stability due to aging, temperature stability, etc... The ADEV has been computed to separate the short-term noise from the long-term noise. In our case, the former (short-term noise) is dominated by the LoRa transceivers timestamping quality. The ADEV computed from 1000 frames is shown in Fig. 9. The ADEV at $\tau = 1$ s, is similar to the value reported in TABLE IV for SETUP II-b (equal to $5E-6/\tau$), confirming that the timestamping capability of the packet forwarder, hosting the SX1301, is similar to the SX1272 one.

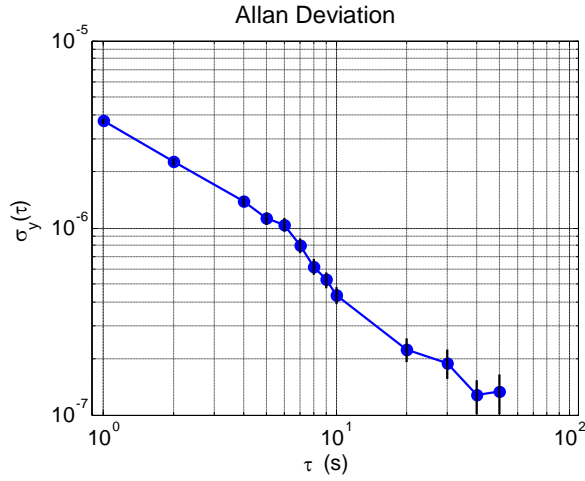


Fig. 9. Allan Deviation (ADEV) of SETUP III. The ADEV values are comparable to the ones measured in SETUP II-b.

D. Downlink test

Despite distributed measurement systems gather information from the field, thus mainly requiring reliable uplink connections, downlinks are fundamental for dynamically parametrize and configure end nodes; for accurate time synchronization; and for supporting feedback loops (e.g. in control applications).

The downlink test characterizes the capability of the packet forwarder to timely transmit messages. A PC, acting as the Network Server, schedules a transmission each “second”, where the “second” refers to the packet forwarder internal time-base, as described in Section III. Formally, this behavior is obtained by incrementing the time-code value (as provided by the Network Server to the packet forwarder) by one second after each transmission.

Fig. 10 shows the experimental SETUP IV. Due to the internal scheduler limitation of the adopted packet forwarder, which allows only one packet to be stored in its own message queue, the experimental setup leverages on an ancillary SX1272 TX board to syntonize (one message per second) the new frame transmission instant. Practically, the SX1272 TX board periodically sends a frame that allows the Network server knowing the value of the packet forwarder internal counter and to be sure that enough time is elapsed from the previous downlink so that the next transmission can be scheduled. This solution is adopted since the Operating System timer function is too much inaccurate and may introduce a frame slip due to drifting. Remarkably, the adopted solution does not affect the time instant of frame transmission by the packet forwarder.

The reception of the frame sent by the packet forwarder is done by another SX1272; its RX_DONE line is connected to the TIC, as a STOP signal. The START signal is the 1 PPS signal also feeding the SX1272 TX board. The choice of using the START and STOP signal in this order is completely arbitrary, and does not affect the measurement. The 1 PPS signal is used as time reference to measure the combined effect of the packet forwarder time-base stability and of the short-term accuracy of the scheduler. Fig. 11 shows the ADEV obtained from this measurement, carried out in laboratory conditions with duration of about 40000 seconds.

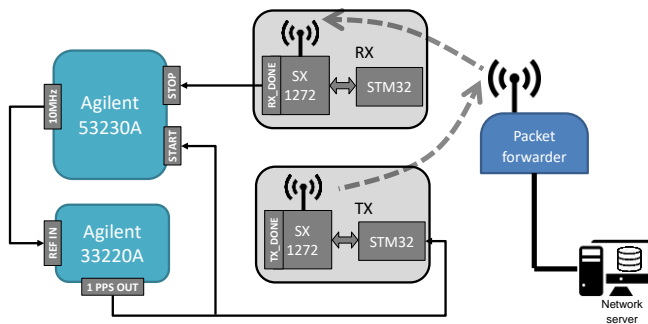


Fig. 10. Experimental setup for the evaluation of the downlink time uncertainty of LoRa radios (SETUP IV).

The long-term stability of the packet forwarder’s time-base is clearly visible at $\tau = 5000-10000s$ (supposing a stationary behavior of the timestamping procedure). The 53230A is not affecting the result; indeed (from the datasheet) the 53230A OCXO stability should be on the order of 0.1 ppb at $\tau = 10000 s$. The packet forwarder stability is compatible with a cheap XO implementation. The frequency offset of the packet forwarder time-base has been estimated as 3 ppm. For $\tau < 1000 s$, the ADEV value is limited by the

SX1272 timestamping quality and by the packet forwarder's scheduler. The slightly larger ADEV at $\tau = 1$ s, with respect to the measurement of SETUP III, is probably imputable to the contribution of the scheduler.

As a final remark, the measured ADEV show that the packet forwarder time-base can be synched (e.g. by PTP protocol or external GPS) every 1000 s without any detrimental effect on the over-all performance of the synchronization system.

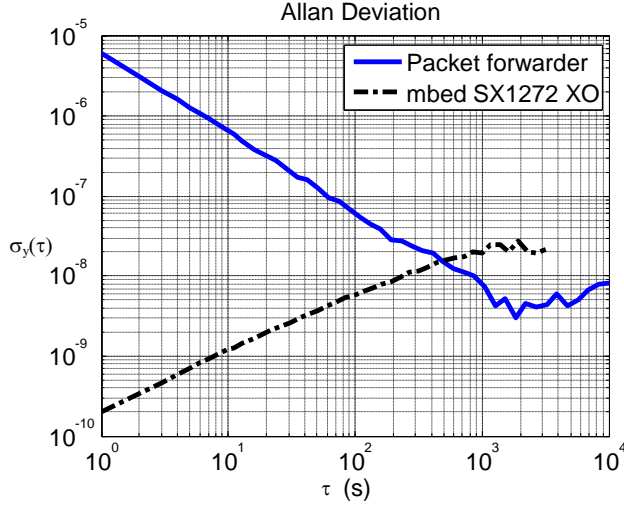


Fig. 11. Allan Deviation (ADEV) of the packet forwarder (solid blue line), SX1272's time-base (dotted black line).

VII. DISCUSSION

As remarked in Section III.C the comparison of experimental results with the requirement of TABLE I is the key for the evaluation of LoRaWAN applied to DMS. Starting from results detailed in the previous section, the TABLE V has been filled in.

TABLE V LORA PERFORMANCE

Min. Update time (s)	Max Latency (s)	Sync err. (s)	Data Size (B)	# Nodes
T_{OA}/d 20s<400s	T_{OA}/d 20s<400s	$<10^{-5}$	51<242	$10^3<10^6$

Regarding the minimum update time and the maximum latency, main limitations may come from regional duty-cycle parameters. Accordingly, both figure of merits ranges from 20 s to 400 s when $d = 1\%$ and T_{OA} varies from about 0.2 s to 4.0 s (considering the maximum permitted payload, i.e. 51 B at SF7 and 242 B at SF12, respectively). Regarding the synchronization accuracy, it has been demonstrated that timestamping errors (on the order of few microseconds) dominate over local clock stability on the short term; on the contrary, for time intervals longer than 100 s, synchronization algorithm could be profitably applied. Regarding the number of nodes, it has been already stated that when few messages per day are enough for the considered application, the number of nodes is in the order of millions, decreasing to few thousands if (synchronized) short refresh time is needed.

Consequently, DMS application domains having many similarities with IoT paradigm, as building automation, structural health monitoring and smart metering, are easily managed by LoRaWAN solution. Industrial process automation and home automation can be handled paying attention to timing requirements of the considered application. Conversely, industrial factory automation update time is not met and grid status estimation synchronization error requirement is not met as well. Finally, building automation and (EV) fleet management require too large chunk of data to be transmitted per message.

VIII. CONCLUSIONS

Any Internet of Things (IoT) system can be considered a distributed measurement system, but the IoT world is pushing new technologies mainly for taking into account scalability and low infrastructure cost, often sacrificing time related requirements. This paper tried to assess if new IoT technologies are usable to realize specialized (private) distributed measurement systems. In details the LoRa and LoRaWAN technologies are investigated since, from the architectural point of view, this solution satisfies many of distributed measurement scenarios needs because of: high number of nodes, very large area of operation, sufficient space in user payload of frames; and some attention to time behavior of nodes. Since the last aspect is probably the least investigated in the literature, this paper focuses on time related performance indicators. Timestamp uncertainty of events is one of the most important source of error in distributed measurement systems and, unfortunately, IoT systems are often designed without considering timestamp accuracy. The experimental results presented in the paper show that low cost transceivers can schedule the transmission of frames

with a standard deviation less than 3 μ s, thus reaching a low sampling time uncertainty. Moreover, commercial available packet forwarders have acceptable long term clock stability (about $1 \cdot 10^{-8}$, as evaluated by means of Allan Deviation) making them suitable for the implementation of distributed measurement systems in the field of smart metering, structural health monitoring, environmental monitoring and process industry.

ACKNOWLEDGMENT

The authors thank Dr. Ing P. Palazzoli of the A2A Smart City SpA for the general discussion about application requirements. The research has been partially funded by research grant MIUR SCN00416, "Brescia Smart Living: Integrated energy and services for the enhancement of the welfare".

REFERENCES

- [1] C. Perera, C. H. Liu and S. Jayawardena, "The Emerging Internet of Things Marketplace From an Industrial Perspective: A Survey," in *IEEE Transactions on Emerging Topics in Computing*, vol. 3, no. 4, pp. 585-598, Dec. 2015
- [2] Stojmenovic, I. Machine-to-machine communications with in-network data aggregation, processing, and actuation for large-scale cyber-physical systems (2014) *IEEE Internet of Things Journal*, 1 (2), art. no. 6766661, pp. 122-128.
- [3] Tao, F., Zuo, Y., Xu, L.D., Zhang, L. IoT-Based intelligent perception and access of manufacturing resource toward cloud manufacturing (2014) *IEEE Trans. on Ind. Informatics*, 10 (2), art. no. 6742605, pp. 1547-1557.
- [4] Hu, P. A System Architecture for Software-Defined Industrial Internet of Things (2015) 2015 *IEEE International Conference on Ubiquitous Wireless Broadband, ICUWB 2015*, art. no. 7324414,
- [5] Zanella, A., Bui, N., Castellani, A., Vangelista, L., Zorzi, M. Internet of things for smart cities (2014) *IEEE Internet of Things Journal*, 1 (1), art. no. 6740844, pp. 22-32.
- [6] Xu, L.D., He, W., Li, S. "Internet of things in industries: A survey", *IEEE Trans. on Ind. Informatics*, 10 (4), art. no. 6945918, pp. 2233-2243, 2014
- [7] Islam, S.M.R., Kwak, D., Kabir, M.H., Hossain, M., Kwak, K.-S. The internet of things for health care: A comprehensive survey (2015) *IEEE Access*, 3, art. no. 7113786, pp. 678-708.
- [8] Castello, P., Ferrari, P., Flammini, A., Muscas, C., Pegoraro, P.A., Rinaldi, S. "A distributed PMU for electrical substations with wireless redundant process bus" *IEEE Transactions on Instrumentation and Measurement*, 64 (5), art. no. 6945856, pp. 1149-1157, 2015.
- [9] Khan, A., Turowski, K. A survey of current challenges in manufacturing industry and preparation for industry 4.0 (2016) *Advances in Intelligent Systems and Computing*, 450, pp. 15-26.
- [10] Liu, Y., Xu, X. Industry 4.0 and cloud manufacturing: A comparative analysis (2016) *ASME 2016 11th International Manufacturing Science and Engineering Conference, MSEC 2016*, 2
- [11] Bellagente, P., Ferrari, P., Flammini, A., Rinaldi, S., Sisinni, E. Enabling PROFINET devices to work in IoT: Characterization and requirements (2016) *Conference Record - IEEE Instrumentation and Measurement Technology Conference*, 2016-July, art. no. 7520417,
- [12] Gallo, D., Landi, C., Pasquino, N. "Multisensor network for urban electromagnetic field monitoring", *IEEE Transactions on Instrumentation and Measurement*, 58 (9), pp. 3315-3322., 2009
- [13] Lee, H.-C., Huang, H.-B., "A Low-Cost and Noninvasive System for the Measurement and Detection of Faulty Streetlights", *IEEE Trans. on Instr. and Meas.*, 64 (4), art. no. 6963461, pp. 1019-1031, 2015.
- [14] Kuzlu, M, Pipattanasomporn, M, Rahman, M, "Communication network requirements for major smart grid applications in HAN, NAN and WAN", *Computer Networks* Volume 67, 4 July 2014, Pages 74-88.
- [15] Ascorti, L., Savazzi, S., Soatti, G., Nicoli, M., Sisinni, E., Galimberti, S., "A Wireless Cloud Network Platform for Industrial Process Automation: Critical Data Publishing and Distributed Sensing", *IEEE Trans. on Instr. and Meas.*, 66 (4), art. no. 7851047, pp. 592-603, 2017
- [16] E. Spanò, S. Di Pascoli and G. Iannaccone, "Internet-of-things infrastructure as a platform for distributed measurement applications," 2015 *IEEE International Instrumentation and Measurement Technology Conference (I2MTC) Proceedings*, Pisa, 2015, pp. 1927-1932.
- [17] . K. Mikhaylov, Juha Petäejäarvi and T. Haenninen, "Analysis of Capacity and Scalability of the LoRa Low Power Wide Area Network Technology," *European Wireless 2016; 22th European Wireless Conference*, Oulu, Finland, 2016, pp. 1-6
- [18] J. So, D. Kim, H. Kim, H. Lee and S. Park, "LoRaCloud: LoRa platform on OpenStack," *Proceedings of 2016 IEEE NetSoft Conference and Workshops (NetSoft)*, Seoul, 2016.
- [19] L. Vangelista, A. Zanella, and M. Zorzi, "Long-range IoT technologies: the dawn of LoRa," *Proceedings of EAI International Conference on Future access enablers of ubiquitous and intelligent infrastructures (Fabulous 2015)* Sep. 23-25, 2015, Ohrid, Republic of Macedonia.
- [20] K. Mikhaylov, J. Petäejäarvi, T. Haenninen, "Analysis of Capacity and Scalability of the LoRa Low Power Wide Area Network Technology", *European Wireless 2016; 22th European Wireless Conference*, Oulu, Finland, 2016, pp. 1-6.
- [21] T. Wendt, F. Volk, E. Mackensen, "Benchmark survey of Long Range (LoRaTM) Spread-Spectrum-Communication at 2.45 GHz for safety applications," *Proc. of 2015 IEEE 16th Annual Wireless and Microwave Technology Conference (WAMICON)*, Cocoa Beach, FL, 2015, pp. 1-4
- [22] T. Petric, M. Goessens, L. Nuaymi, A. Pelov, L. Toutain, "Measurements, "Performance and Analysis of LoRa FABIAN, a real-world implementation of LPWAN", *Proceedings of PIMRC 2016 27th Annual International Symposium on Personal, Indoor, and Mobile Radio Communications*, Sep 2016, Valencia, Spain.
- [23] A. Augustin, J. Yi, T. Clausen, W.M. Townsley, "A Study of LoRa: Long Range & Low Power Networks for the Internet of Things". *Sensors* 2016, 16, 1466.
- [24] B. Reynders, W. Meert and S. Pollin, "Range and coexistence analysis of long range unlicensed communication," *Proc. of 2016 IEEE 23rd International Conf. on Telecomm. (ICT)*, Thessaloniki, 2016, pp. 1-6
- [25] J. Petäjäjärvi, K. Mikhaylov, M. Pettissalo, J. Janhunen, J. Iinatti, "Performance of a low-power wide-area network based on LoRa technology: Doppler robustness, scalability, and coverage", *International Journal of Distributed Sensor Networks*, Vol 13, Issue 3, 2017
- [26] T. Verbeke, E. Olti, and A. Munteanu, "Development and Demonstration of a LoRa TDOA-based Localisation System: Demo", in *Proceedings of the 10th International Conference on Distributed Smart Camera (ICDSC '16)*, 2016, ACM, New York
- [27] Ferrari, P., Flammini, A., Sisinni, E., Depari, A., Rizzi, M., Exel, R., Sauter, T., "Timestamping and ranging performance for IEEE 802.15.4 CSS systems", *IEEE Transactions on Instrumentation and Measurement*, 63 (5), art. no. 6657804, pp. 1244-1252., 2014

- [28] 3GPP - GERAN (GSM EDGE Radio Access Network) Meeting #65, "Combined narrow-band and Spread Spectrum physical layer proposal for cellular IoT", Available on line http://www.3gpp.org/ftp/tsg_geran/TSG_GERAN/GERAN_65_Shanghai/Docs/GP-150074.zip
- [29] C. Goursaud, J.-M. Gorce, "Dedicated networks for IoT: PHY/MAC state of the art and challenges," EAI endorsed Transactions on Internet of Things, 2015. [Online]. Available: <https://hal.archives-ouvertes.fr/hal-01231221>
- [30] M. Rizzi, P. Ferrari, A. Flammini, E. Sisinni, M. Gidlund, "Using LoRa for industrial wireless networks", 2017 IEEE 13th International Workshop on Factory Communication Systems (WFCS), Trondheim, Norway, May 31 - June 2, 2017, pp. 1-4.