




Grounding Components Importance

There are several main objectives for well-designed grounding systems: personal safety, equipment protection, signal reference quality, faults & surges return path, and static dissipation. Also, connections in the ground network are subjected to severe corrosion, high mechanical stress due to electromagnetic force, and thermal heating due to high current magnitude during fault conditions. Grounding components are crucial grounding support to meet the well-designed goals, which are maintaining a low contact resistance under adverse conditions for the expected lifetime of the groundings systems.

Ground Clamps

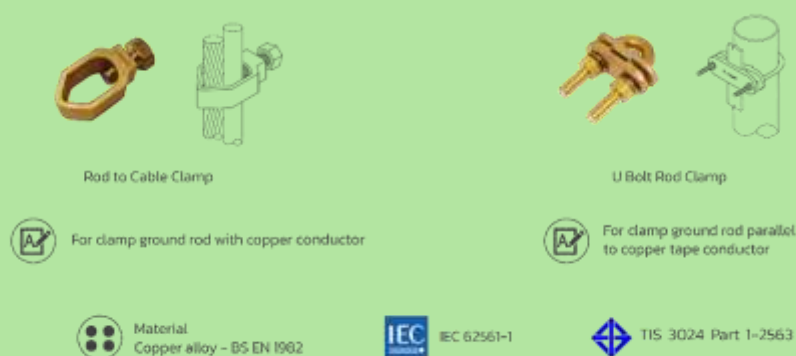

Earth Points



Earth Point



For connect rebar to earth point



Material
Copper alloy – BS EN 1982



IEC 62561-1



Earth Point with Prewelding



For connect rebar to earth point



TIS 3024 Part 1-2563

Equipotential Ground Bars



Telecommunication / Communication
Ground Station



For connect ground conductors
wires to earth electrodes



Copper 99%
Tin plated copper – BS EN 13601



IEC 62561-1



Twin Disconnecting Link



Bonding metal gates, fences or where
flexibility and strength is required



Busbar – Tin plated copper – BS EN 13601
Support – Zinc plated steel with insulator



TIS 3024 Part 1-2563

Ground Plates



Lattice Copper



Material
Copper – BS EN 13601



Application
To minimize the danger of exposure to high step and touch voltages.



Solid Copper



Material
Copper – BS EN 13601



Application
Suitable for an area where unable to drive ground rod.



Copper-Bonded Steel



Material
Copper-Bonded steel 254 micron Copper thickness




Application
Suitable for an area where unable to drive ground rod.

Concrete Inspection Pits



Standard Type

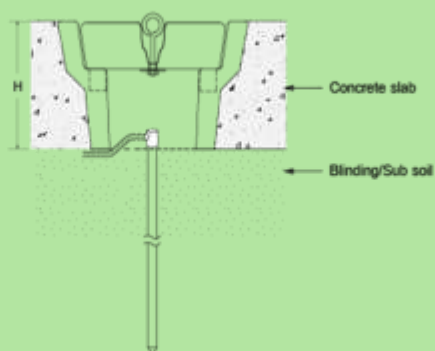

IEC 62561-5 Heavy Duty Type



For inspect and testing point in grounding systems




Concrete



TIS 3024 Part 5-2564



Heavy Duty Type

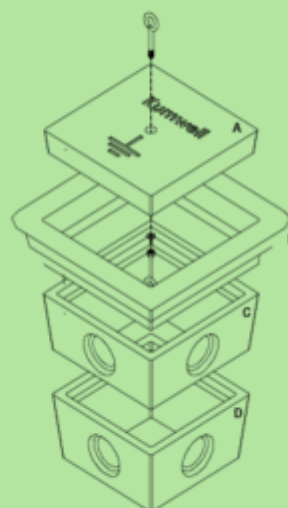

IEC 62561-5 Heavy Duty Type



For inspect and testing point in grounding systems



Concrete

C-crimp Clamps



C-Clamp



Application
Suitable for copper cable connection in grounding and lightning protection by using hydraulic crimping tools, HCT-S1, HCT-M1 and HCT-P1



High purity copper profiles



IEC 62561-1



C-Clamp with Tin



Application
Suitable for copper cable connection in grounding and lightning protection by using hydraulic crimping tools, HCT-S1, HCT-M1 and HCT-P1



High purity copper profiles & tin plated



TIS 3024 Part 1-2563

Copper Lugs



2-Hole Copper Lugs



Usable with high voltage (up to 35 kV) for grounding and lightning protection system



High purity copper profiles & tin plated



IEC 62561-1



Copper Lugs



Designed for low voltage (up to 600v) for grounding and lightning protection system



High purity copper profiles & tin plated



CC1