

Technical Data Sheet

Die-Cast Aluminium Enclosed Switchgear

General Description

A range of die-cast aluminium enclosed isolation equipment with sealing up to IP66. All units have a padlockable handle which allow for the insertion of up to three padlocks in the 'Off' position thus preventing the isolator being switched to the 'On' position. All units are interlocked in the ON position preventing the lid from being removed. Compliant to IEC / BS EN 60947-3.

'N' = switched neutral (early make, late break) | 'NL' = unswitched neutral | 'CO' = 1N/O + 1N/C auxiliary early break contacts

Add suffix '/10' to the Cat. No. for padlocking in the 'On' position e.g. EDDKG633NLX/10

Image	Rating	Format	Cat. No.	Cable Entries	Cat. No.	Cable Entries	Encl. Size	Encl. Material	IP Rating	Encl. Colour
	20A	6P	EDDG206X	2xM25 Btm	EDDG206Y	2xM25 Top & Btm	C	Die-cast Aluminium	IP66	Light Grey Ral 7035
		6P+2EB Aux	EDDG206EBX		EDDG206EBY					
	25A	2P	EDDKG252X	2xM25 Btm	EDDKG252Y	2xM25 Top & Btm	C	Die-cast Aluminium	IP66	Light Grey Ral 7035
		3P + SN	EDDKG253NX		EDDKG253NY					
		3P + NL	EDDKG253NLX		EDDKG253NLY					
	32A	2P	EDDKG322X	2xM25 Btm	EDDKG322Y	2xM25 Top & Btm	C	Die-cast Aluminium	IP66	Light Grey Ral 7035
		3P + SN	EDDKG323NX		EDDKG323NY					
		3P + NL	EDDKG323NLX		EDDKG323NLY					
	40A	2P	EDDKG402X	2xM25 Btm	EDDKG402Y	2xM25 Top & Btm	C	Die-cast Aluminium	IP66	Light Grey Ral 7035
		3P + SN	EDDKG403NX		EDDKG403NY					
		3P + NL	EDDKG403NLX		EDDKG403NLY					
		6P	EDDG406X	2xM32 & 1xM16 Btm	EDDG406Y	2xM32 Top & Btm & 1xM16 Btm	B	Die-cast Aluminium	IP65	Light Grey Ral 7035
		6P + EB Aux	EDDG406EBX		EDDG406EBY					
	63A	2P	EDDKG632X	2xM32 & 1xM16 Btm	EDDKG632Y	2xM32 & 1xM16 Btm 2xM32 Top	B	Die-Cast Aluminium	IP65	Light Grey RAL 7035
		3P + SN	EDDKG633NX		EDDKG633NY					
		3P + NL	EDDKG633NLX		EDDKG633NLY					
	80A	2P	EDDKG802X	2xM32 & 1xM16 Btm	EDDKG802Y	2xM32 & 1xM16 Btm 2xM32 Top	B	Die-Cast Aluminium	IP65	Light Grey RAL 7035
		3P + SN	EDDKG803NX		EDDKG803NY					
		3P + NL	EDDKG803NLX		EDDKG803NLY					
	100A	2P	EDDKG1002X	2xM32 & 1xM16 Btm	EDDKG1002Y	2xM32 & 1xM16 Btm 2xM32 Top	B	Die-Cast Aluminium	IP65	Light Grey RAL 7035
		3P + SN	EDDKG1003NX		EDDKG1003NY					
		3P + NL	EDDKG1003NLX		EDDKG1003NLY					

Technical Data Sheet

Die-Cast Aluminium Enclosed Switchgear

CDPD222
Issue 2


Technical Specification

Data supplied against tests to IEC/BS EN 60947-3


Application	Sym.	Unit	Category	20A	25A	32A	40A		63A	80A	100A
Interior switch		-		GX20	K25	K32	K40	GX40	K63	K80	K100
Rated thermal current	I _{the}	A		20	25	32	40	40	63	80	100
Rated insulation voltage	U _i	V		690	690	690	690	690	690	690	690
Rated impulse voltage	U _{imp}	kV		6	4	4	4	6	6	6	6
Rated operational current	I _e	A	400V AC23A (3 phase AC 50/60Hz)	15	25	32	40	35	63	80	100
Rated operational power	I _e	kW	230V	2.2	3.9	5	6.0	6.0	9.4	18.4	23.0
	P _e		400V	7.5	7.5	11	15	18.5	22	30	37
Rated short time withstand current	I _{cw}	A	1 sec	250	500	500	800	800	800	2000	2000
Max. fuse size for short circuit protection	gG	kA	10kA	20	35	35	40	40	63	-	-
			25kA	16	32	32	32	35	50	-	-
			50kA	-	32	32	32	-	50	-	-
Recommended connecting capacity		-	Terminal type								
		mm ²	Flexible cable	2.5 x 2	6	6	6	6 x 2	16	16	25
		mm ²	Rigid cable	2.5 x 2	10	10	10	10 x 2	25	25	25
		Nm	Tightening torque	1.0	1.2	1.2	1.2	1.0	1.2	2	2
Operating Temperature Range			Ambient	-5°C to +50°C							

Dimensions

Size B

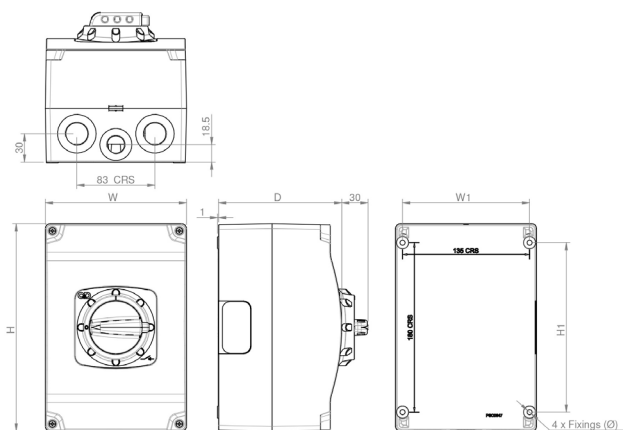

Size C

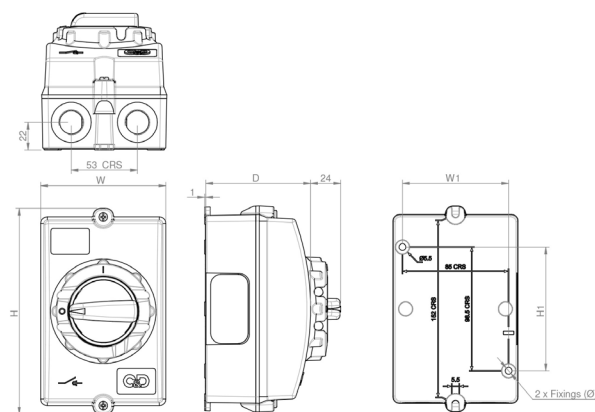

Encl. Size	Overall Dims.			Fixing Details		
	H	W	D	H1	W1	Ø
B	220	150	120	180	135	5.5
C	164	100	84.5	98.5	85	5.5