

Technical Data Sheet

EDMP Moulded Plastic Switchgear Range

CDPD275

General Description

A NEW range of moulded plastic enclosed isolation equipment with sealing up to IP66. This range of 4P isolators are rated 25A to 100A, providing a 3-in-1 switch for the end user. Each unit can be utilised for 2P, 3P and 4P requirements. The spacious IP66 moulded plastic enclosure, comes with four external fixing holes and an the option to remove the internal switch from the built in din rail for easy cabling and a quick installation.



All four variants have a red safety padlockable handle, which allows for an insertion of up to two padlocks in the 'Off' position thus preventing the isolator being switched to the 'On' position. All units are interlocked in the ON position preventing the lid from being removed and when padlocked in the OFF position.

Each unit has been independently tested and is competitively priced for the industrial market. Contact your local area sales manager today for more information. Compliant to IEC / BS EN 60947-3.

Switch Disconnectors (O-I)									
Image	Rating	Format	Interior Switch	Cat No.	Encl. Size	Encl. Material	Encl. Colour	IP Rating	Cable Entries
	25A	4P	K25	EDMP254	EA	PC / ABS	Light Grey RAL 7047	IP66	2xM12/M20 knock-outs top and btm
	32A	4P	K32	EDMP324	EA	PC / ABS	Light Grey RAL 7047	IP66	
	40A	4P	K40	EDMP404	EA	PC / ABS	Light Grey RAL 7047	IP66	
	40A	4P	K40H	EDMP404H	EB	PC / ABS	Light Grey RAL 7047	IP66	2xM20/M25 knock-outs top and btm
	63A	4P	K63	EDMP634	EB	PC / ABS	Light Grey RAL 7047	IP66	
	80A	4P	K80	EDMP804	EC	PC / ABS	Light Grey RAL 7047	IP65	2xM32/M25 + 1xM20 knock-outs top and btm
	100A	4P	K100	EDMP1004	EC	PC / ABS	Light Grey RAL 7047	IP65	

Technical Data Sheet

EDMP Moulded Plastic Switchgear Range

CDPD275

Technical Specification

Data supplied against tests to IEC/BS EN 60947-3

Application	Sym.	Unit	Category	25A	32A	40A	40AH
Interior switch		-		K25	K32	K40	K40H
Rated thermal current	I_{the}	A		25	32	40	40
Rated insulation voltage	U_i	V		690	690	690	690
Rated impulse voltage	U_{imp}	kV		4	4	4	6
Rated operational current	I_e	A	400V AC23A (3 phase AC 50/60Hz)	25	32	40	40
Rated operational power	I_e	kW	230V	3.9	5	6.0	6.0
	P_e		400V	7.5	11	15	15
Rated short time withstand current	I_{cw}	A	1 sec	500	500	800	800
Max. fuse size for short circuit protection	gG	kA	10kA	35	35	40	40
			25kA	32	32	32	40
			50kA	32	32	32	40
Recommended connecting capacity		-	Terminal type				
		mm ²	Flexible cable	6	6	6	16
		mm ²	Rigid cable	10	10	10	25
		Nm	Tightening torque	1.2	1.2	1.2	1.2
Operating Temp Range			Ambient	-5°C to + 40°C			


Application	Sym.	Unit	Category	63A	80A	100A
Interior switch		-		K63	K80	K100
Rated thermal current	I_{the}	A		63	80	100
Rated insulation voltage	U_i	V		690	690	690
Rated impulse voltage	U_{imp}	kV		6	6	6
Rated operational current	I_e	A	400V AC23A (3 phase AC 50/60Hz)	63	80	100
Rated operational power	I_e	kW	230V	9.4	18.4	23.0
	P_e		400V	22	30	37
Rated short time withstand current	I_{cw}	A	1 sec	800	2000	2000
Max. fuse size for short circuit protection	gG	kA	10kA	63	-	-
			25kA	50	-	-
			50kA	50	-	-
Recommended connecting capacity		-	Terminal type			
		mm ²	Flexible cable	16	-	-
		mm ²	Rigid cable	25	25	35
		Nm	Tightening torque	1.2	2	2
Operating Temp Range			Ambient	-5°C to + 40°C		

Technical Data Sheet


EDMP Moulded Plastic Switchgear Range

Dimensions


Size EA

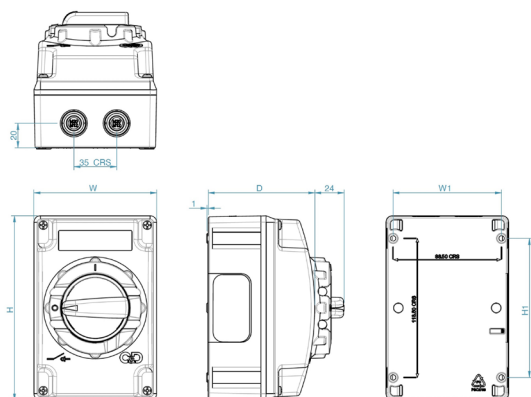

Size EB

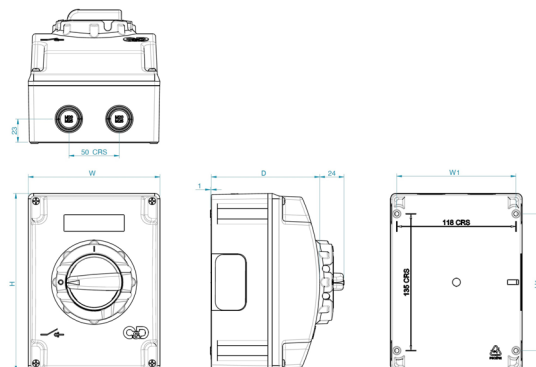

Size EC

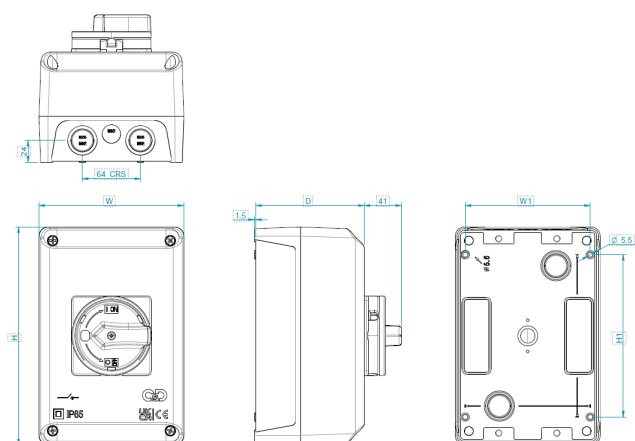

Encl. Size	Overall Dims.			Fixing Details	
	H	W	D	H1	W1
EA	150	100	87	113.5	88.5
EB	175	130	107	135	118
EC	240	160	120	179	138