

FLUSH MOUNTING SWITCHGEAR

A range of flush mounting isolation equipment ranging 20A to 63A, supplied with a Sheet Steel back box and Stainless Steel fascia plate sealed up to IP65. The range is supplied with a handle manufactured from a material suitable to withstand cleaning products containing sodium hydroxide all units have a padlockable handle which allow for the insertion of up to three padlocks in the 'Off' position thus preventing the isolator being switched to the 'On' position. All units are interlocked in the ON position preventing the lid from being removed. Suitable for installation in kitchens, laboratories, food processing areas, hospitals and many other areas.


The option to add a selection of auxiliary blocks providing additional contacts and a choice of Neutral assemblies increases the flexibility of the product range. External mounting feet in Stainless Steel are offered as an accessory sized to match each enclosure.

To maintain the sealing overall, an efficient bond must be made using some form of gasket material. This is particularly vital on tiled surfaces where grout lines can channel moisture down the wall. A continuous bead of moisture resistant mastic is a simple way of providing a seal, and can improve the appearance of the final assembly on an uneven surface.

Switch-Disconnectors (O-I)										
Image	Rating	Switch Type	Format	Standard Cat. No.	IP65 Back Box Cat. No.	IP Rating	Encl. Size	Fascia plate Material	Back Box Material	Cable Entries
	20A	GX20	2P	SDFL202	SDFL202/65	Isolating switch to stainless steel fascia plate IP65	A	Brushed Stainless Steel Grade 304	Zinc Plated Sheet Steel	Knock-outs In Back Box
			3P	SDFL203	SDFL203/65					
			4P	SDFL204	SDFL204/65					
	32A	GX32	2P	SDFL322	SDFL322/65	Isolating switch to stainless steel fascia plate IP65	B	Brushed Stainless Steel Grade 304	Zinc Plated Sheet Steel	Knock-outs In Back Box
			3P	SDFL323	SDFL323/65					
			4P	SDFL324	SDFL324/65					
	40A	GX40	2P	SDFL402	SDFL402/65	Isolating switch to stainless steel fascia plate IP65	B	Brushed Stainless Steel Grade 304	Zinc Plated Sheet Steel	Knock-outs In Back Box
			3P	SDFL403	SDFL403/65					
			4P	SDFL404	SDFL404/65					
	63A	GN63	2P	SDFL632	SDFL632/65	Isolating switch to stainless steel fascia plate IP65	C	Brushed Stainless Steel Grade 304	Zinc Plated Sheet Steel	Knock-outs In Back Box
			3P	SDFL633	SDFL633/65					
			4P	SDFL634	SDFL634/65					
	80A	CS80	2P	-	SDFLL0802	Isolating switch to stainless steel fascia plate IP65	D	Brushed Stainless Steel Grade 304	Zinc Plated Sheet Steel	None
			3P	-	SDFLL0803					
			4P	-	SDFLL0804					
	100A	CS100	2P	-	SDFLL1002	Isolating switch to stainless steel fascia plate IP65	E	Brushed Stainless Steel Grade 304	Zinc Plated Sheet Steel	None
			3P	-	SDFLL1003					
			4P	-	SDFLL1004					

Standard Flush Mounted

20A- 63A

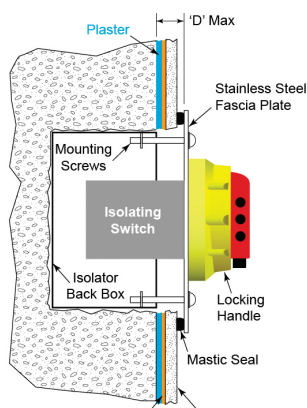


Typical Installation

'D' max = 20mm with standard length mounting screws

IP65 Back Box Flush Mounted

20A- 63A

80A-100A

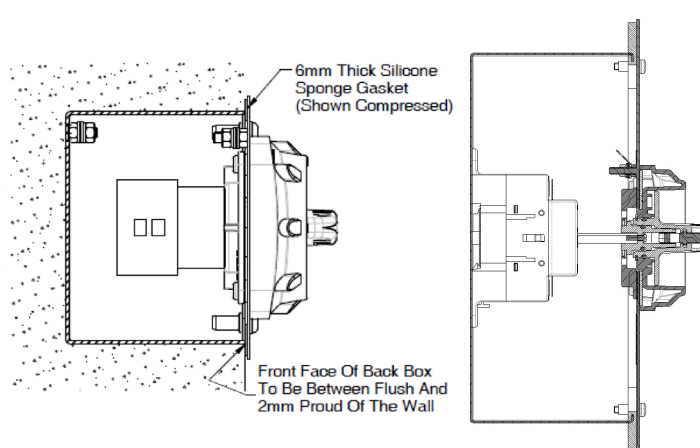

Technical Data Sheet

Flush Mounting Enclosed Switchgear

CDPD114
Issue 4

Technical Specification



Data supplied against tests to IEC/BS EN 60947-3

Fixed Lid Enclosed Switchgear									
Application	Sym.	Unit	Category	20A	32A	40A	63A	80A	100A
Interior switch		-		GX20	GX32	GX40	GN63	CS80	CS100
Rated thermal current	I_{the}	A		20	32	40	63	80	100
Rated insulation voltage	U_i	V		690	690	690	690	690	1000
Rated impulse voltage	U_{imp}	kV		6	6	6	6	6	8
Rated operational current	I_e	A	400V AC23A (3 phase AC 50/60Hz)	15	32	35	60	63	100
Rated operational power	I_e	kW	230V	2.2	4.8	6.0	-	-	-
	P_e		400V	7.5	15	18.5	30	30	59
Rated short time withstand current	I_{cw}	A	1 sec	250	800	800	1600	1400	2600
Max. fuse size for short circuit protection	gG	kA	10kA	20	35	40	63	80	160
			25kA	16	35	35	63	63	160
			50kA	-	-	-	63	63	160
Recommended connecting capacity		-	Terminal type						
		mm ²	Flexible cable	2.5 x 2	6 x 2	6 x 2	10	16	50
		mm ²	Rigid cable	2.5 x 2	10 x 2	10 x 2	16	25	25
		Nm	Tightening torque	1.0	1.0	1.0	1.2	1.2	5
Operating Temperature Range			Ambient	-5°C to +40°C					

Dimensions

Size A - C

Size D & E

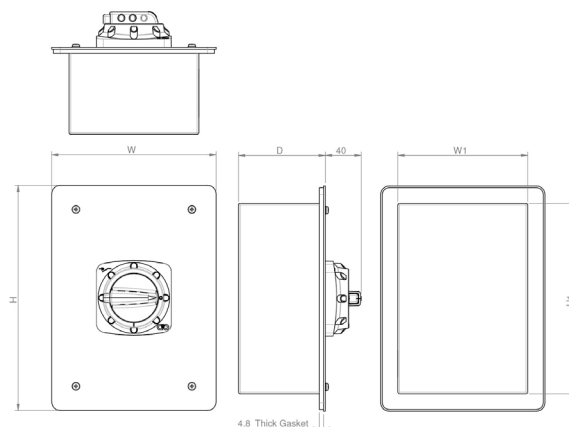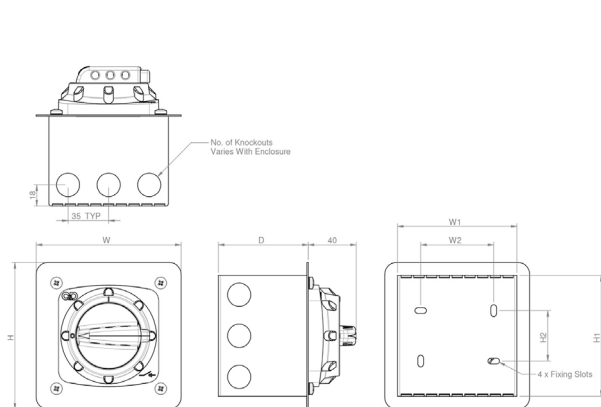

Encl. Size	Overall Dims.			Fixing Details			
	H	W	D	H1	H2	W1	W2
A	125	125	75	100	43	100	62
B	175	175	75	150	93	150	113
C	175	175	100	150	93	150	113
D	260	190	97-101	220	--	150	--
E	320	260	126-130	280	--	220	--