

Technical Data Sheet

Stainless Steel Enclosed Switchgear Range

CDPD113
Issue 3

Stainless Steel Enclosed Switchgear

A range of isolation equipment housed in Grade 304 stainless steel enclosures sealed to IP66. All units have a padlockable handle which allow for the insertion of up to three padlocks in the 'Off' position thus preventing the isolator being switched to the 'On' position.

As a standard feature the units have the ability to add a selection of auxiliary blocks providing additional contacts and a choice of Neutral assemblies. External mounting feet in stainless steel are offered as an accessory sized to match each enclosure. The range is supplied with a handle manufactured from a material suitable to withstand cleaning products containing sodium hydroxide.

Stainless Steel Grade 316 enclosures are available on request.

'N' = switched neutral (Early make, late break) | 'NL' = Unswitched neutral | 'EB' = Early break auxiliary contacts

Switch-Disconnectors (O-I)									
Image	Rating	Interior Switch	Format	Cat. No.	Encl. Size	Encl. Material	IP Rating	Encl. Colour	Cable Entries
	20A	GX20	6P	SDS206	A	Stainless Steel Grade 304	IP66	Brushed Satin Finish	2 x M20
			6P+2EB Aux	SDS206EB					
	25A	CS25	2P	SDS252	A	Stainless Steel Grade 304	IP66	Brushed Satin Finish	2 x M20
			3P	SDS253					
			3P+NL	SDS253NL					
			3P+N	SDS253N					
			3P+2EB Aux	SDS253EB					
	32A	CS32	2P	SDS322	A	Stainless Steel Grade 304	IP66	Brushed Satin Finish	2 x M20
			3P	SDS323					
			3P+NL	SDS323NL					
			3P+N	SDS323N					
			3P+2EB Aux	SDS323EB					
	40A	CS40R	2P	SDS402	B	Stainless Steel Grade 304	IP66	Brushed Satin Finish	2 x M20 + 2 x M25
			3P	SDS403					
			3P+NL	SDS403NL					
			3P+N	SDS403N					
			3P+2EB Aux	SDS403EB					
		GX40	6P	SDS406					
	6P+2EB Aux		SDS406EB						
	63A	CS63	2P	SDS632	B	Stainless Steel Grade 304	IP66	Brushed Satin Finish	2 x M20 + 2 x M25
			3P	SDS633					
			3P+NL	SDS633NL					
			3P+N	SDS633N					
			3P+2EB Aux	SDS633EB					
Changeover Switch-Disconnectors (I-O-II)									
	20A	GX20	2P	SCODS202	A	Stainless Steel Grade 304	IP66	Brushed Satin Finish	2 x M20
			3P	SCODS203					
			4P	SCODS204					
	40A	GX40	2P	SCODS402	B	Stainless Steel Grade 304	IP66	Brushed Satin Finish	2 x M20 + 2 x M25
			3P	SCODS403					
			4P	SCODS404					

Technical Data Sheet

Stainless Steel Enclosed Switchgear Range

CDPD113
Issue 3

Fixed Lid Accessories

All of the accessories listed below can be retrofitted. One block can be fitted either side of the main assembly on all of the 3 pole Switch-Disconnectors interiors.

Description	Cat. No.
Auxiliary Contact- 2 Early Break	SAUX2EB
Auxiliary Contact- 1 N/O + 1 N/C	SAUXCO
25A- 40A Compact Neutral (Unswitched)	SNLC40
63A Neutral (Unswitched)	SNL63
80A Neutral (Unswitched)	SNL80
25A Neutral (Switched)	SSP25
40A Neutral (Switched)	SSP40
63A Neutral (Switched)	SSP63
80A Neutral (Switched)	SSP80
External Fixing Feet for 20A- 32A	EFA
External Fixing Feet for 40A- 63A	EFB
External Fixing Feet for 80A- 100A	EFC

Technical Specification

Data supplied against tests to IEC/BS EN 60947-3


Application	Sym	Unit	Category	20A	25A	32A	40A		63A	80A
Interior Switch		-		GX20	CS25	CS32	GX40	CS40R	CS63	CS80
Rated thermal current	I _{the}	A		20	25	32	40	40	63	80
Rated insulation voltage	U _i	V		690	690	690	690	690	690	690
Rated impulse voltage	U _{imp}	kV		6	6	6	6	6	6	6
Rated operational Current	I _e	A	400V- AC23A (3 phase AC 50/60Hz)							
Rated operational power (Single phase)		kW	230V- AC23	-	3.7	4.8	-	6.0	9.4	-
Rated operational power (Three phase)		kW	380/440- AC23	7.5	11	15	18.5	15	25	30
			500V- AC23	7.5	15	15	15	15	30	37
			690V- AC23	7.5	15	15	15	15	30	30
Rated short time withstand current	I _{cw}	A	1 Sec	250	500	600	800	600	1300	1400
Max. fuse size for short circuit protection (gG Characteristic)		kA	10kA	20	35	35	40	40	80	80
			25kA	16	32	32	35	32	63	63
			50kA	-	32	32	-	32	63	63
Recommended connecting capacity		-	Terminal type							
		mm ²	Flexible cable	2.5 x 2	6	6	6 x 2	6	16	16
		mm ²	Rigid cable	2.5 x 2	10	10	10 x 2	10	25	25
		Nm	Tightening torque	1.0	1.2	1.2	1.0	1.2	1.2	1.2

Technical Data Sheet

Stainless Steel Enclosed Switchgear Range

CDPD113
Issue 3

SDS Stainless Steel Dimensions

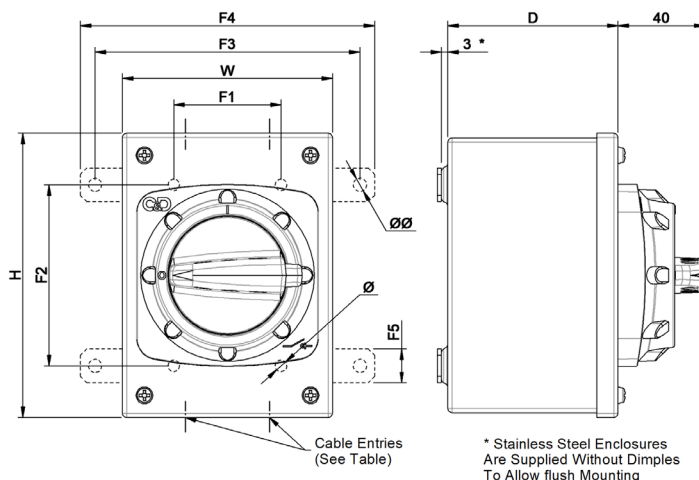

Encl. Size	Overall Dims.			Internal Fixings			External EFA/EFB Fixings				Cable Entries	
	H	W	D	F1	F2	Ø	F3	F4	F5	ØØ	Top	Bottom
Size A	135	100	80	51	86	5.5	126	140	16	6.35	--	2x M20
Size B	175	130	100	81	126	5.5	155	178	16	6.35	2x M20	2x M25
Size C	310	200	100	146	256	6.5	228	249	20	6.35	Centre mark dimples for on-site drilling to suit	