
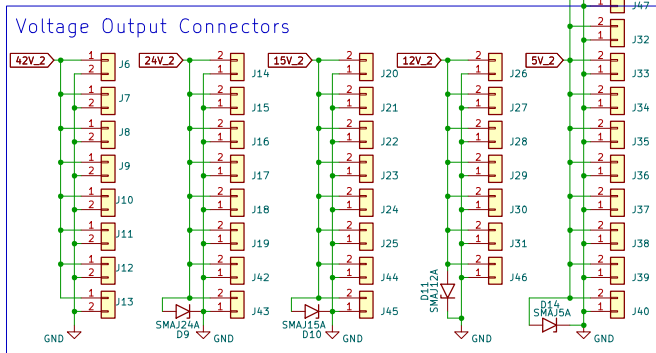

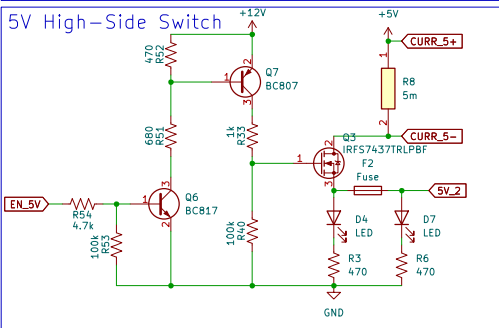

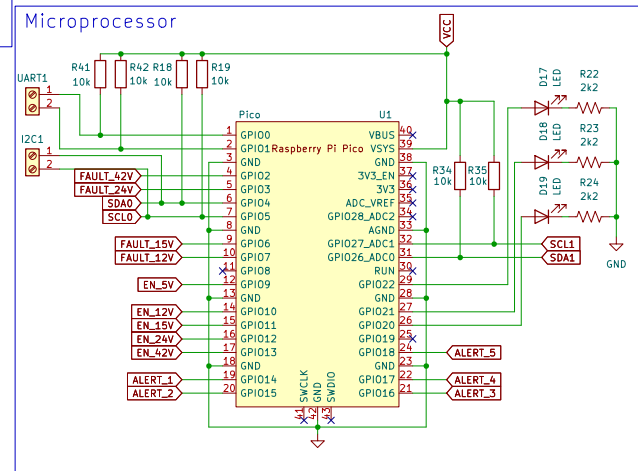
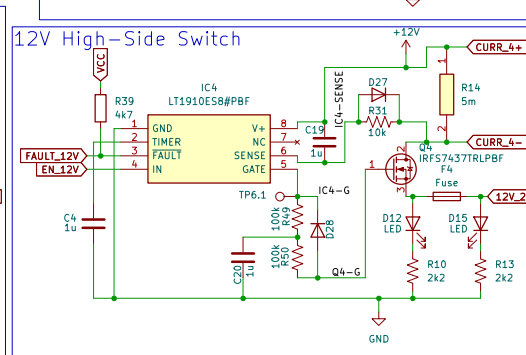
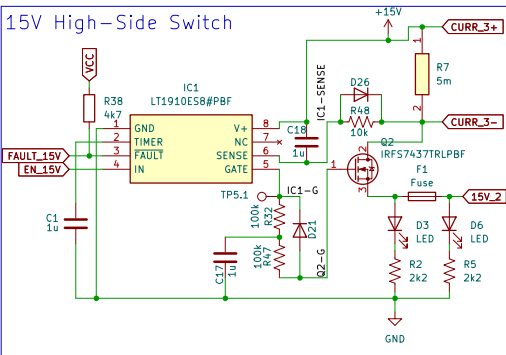
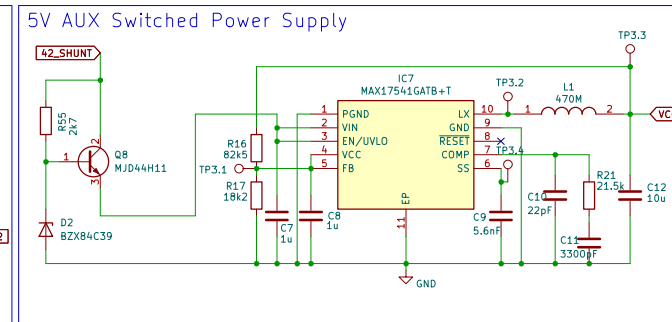
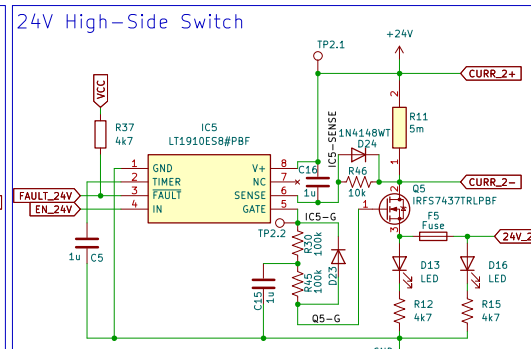


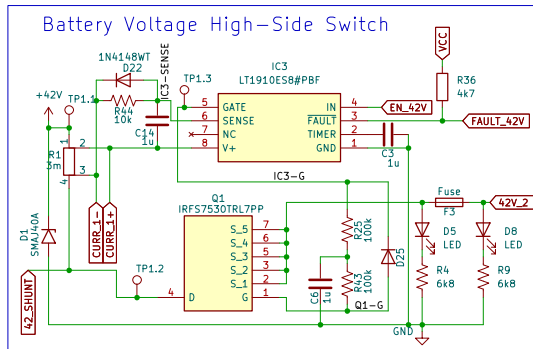

Test Points:

Battery Voltage High-Side Switch:
 TP1.1 – kontrola vstupného napätia batéria
 TP1.2 – napätie pred MOSFETom, kontrola shuntu
 TP1.3 – kontrola gate drive IC3-Q1

24V High-Side Switch:
 TP2.1 – kontrola vstupného napätia 24V
 TP2.2 – výstup drivera LT1910 IC5

AUX:
 TP3.1 – kontrola VCC/FB
 TP3.2 – kontrola pred LX
 TP3.3 – kontrola za LX
 TP3.4 – kontrola SoftStart

INA238:
 TP4.1 – kontrola U2 curr+
 TP4.2 – kontrola U2 curr-
 TP4.3 – kontrola SCL1
 TP4.4 – kontrola SDA1

15V High-Side Switch:
 TP5.1 – výstup drivera LT1910 IC5

12V High-Side Switch:
 TP6.1 – výstup drivera LT1910 IC4

