ELECTRONICS AND COMMUNICATION TECHNOLOGIES: ELECTRONICS SYSTEMS

LM Cyber Security – Fall 2024

Federico Baronti, Luca Crocetti

Dip. Ing. Informazione

Via G. Caruso, 16 – Stanza B-1-09

050 2217581 – federico.baronti@unipi.it

Office hours:

Friday 14-16. Please, contact me in advance before showing up. We can also arrange an appointment remotely on Microsoft Teams.

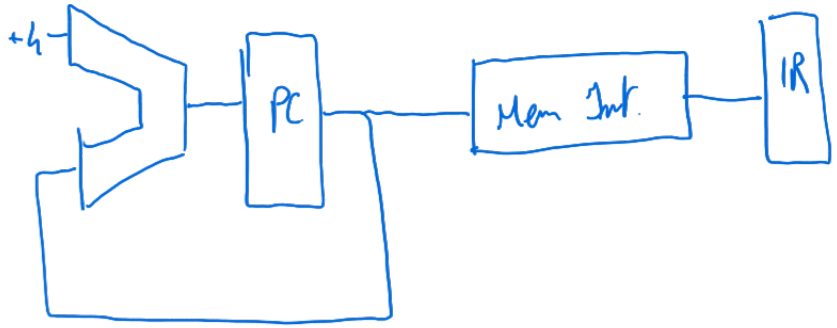

RISC INSTRUCTION SET ARCHITECTURE: INTEL NIOS 2 PROC.

what are the instructions executable by a processor.

Instructions Set Architecture

- **Instruction Set Architecture (ISA)** can be seen as the specifications of a processor
  - ISA affects processor performances [strong relationships] (RISC, CISC, GPU, ASIP*) Reduced instruction set computers.
  - Possible different implementations of the same ISA
- Instructions for a computer must support:
  - data transfers to and from the memory
  - arithmetic and logic operations on data
  - program sequencing and control
  - input/output transfers

* Application-Specific Instruction set Processor (you design your own instruction set)

RISC and CISC Instruction Sets

- Nature of instructions distinguishes computer
- Two fundamentally different approaches:
  - Reduced Instruction Set Computers (RISC) have **one-word instructions** and require arithmetic operands to be in registers
  - Complex Instruction Set Computers (CISC) have multi-word instructions and allow operands directly from memory

idea: you have powerful instruction and this can limit the clock freq. So to have higher frequency you could sacrifice complex instructions, this is the idea. You have more constraint

RISC Instruction Sets

- **Each RISC instruction occupies a single word**
- A load/store architecture is used, meaning:
  - Only Load and Store instructions are used to access memory operands
  - Operands for arithmetic/logic instructions must be in registers, or one of them can be provided explicitly in the instruction word (*Immediate* operand)
  - E.g. Load *proc_register*, *mem_location*
  - Addressing mode specifies actual memory location

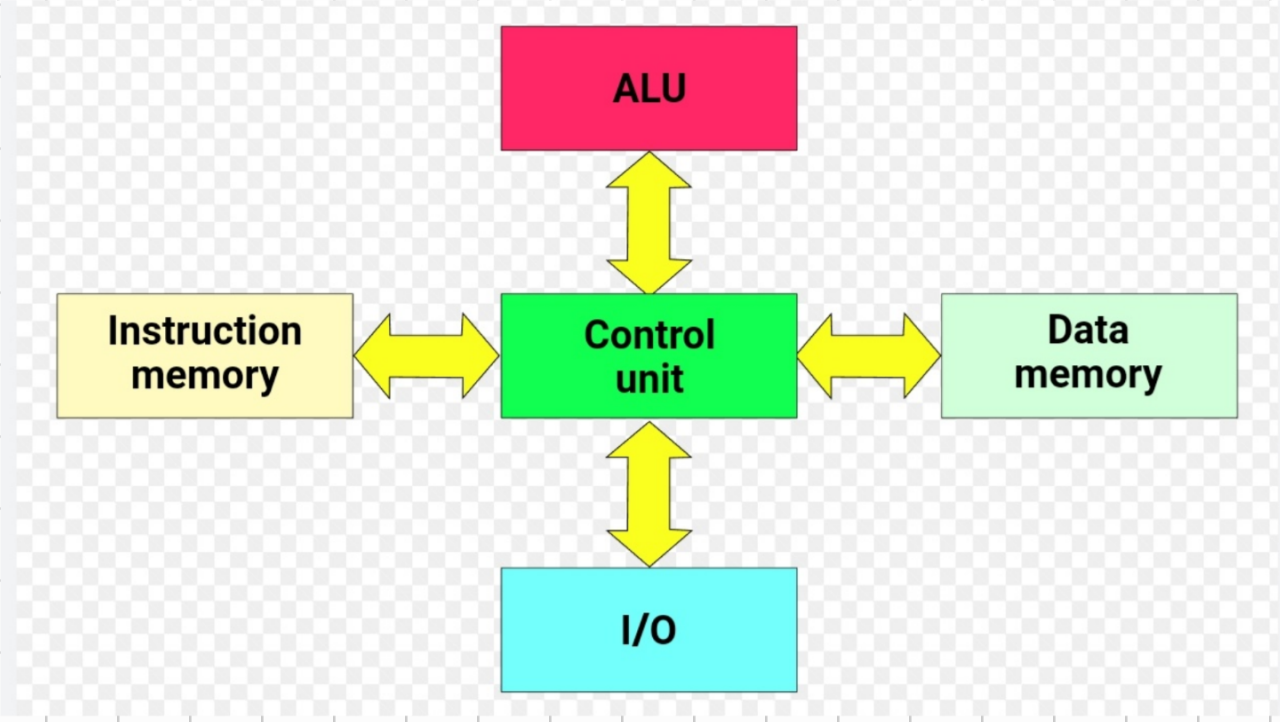
ALU
Instruction memory
Control unit
Data memory
I/O

Program counter: every time incremented by 4. For some instr. during the ex. of the instruction, the PC is modified. In general, after the fetch it is incremented by 4.

Nios II Main Characteristics

- RISC-style architecture (all instructions are 32-bit long)
- 32-bit data *word*
- 2x memory interfaces (Harvard architecture)
- **Byte-addressable** memory space:
  - With little-endian addressing scheme (lower byte addresses used for less significant bytes)
  - The LOAD and STORE instructions can transfer data in: *word*, *half-word*, and *byte*
- 32 general-purpose registers, 32-bit long
- Several additional control registers
- 2 versions: economy (5-stage) and fast (6-stage w. pipelining)

↳ if the memory is fast enough to accommodate an access within 1 clock cycle, you can have 5 stages for an instruction.

Pipelining: the exe time of the instruction doesn't change, but ideally every clock cycle the processor completes an instruction, even if every instruction took 5 cycles.

All instructions go through the stages (for some, they do nothing in one of the stages).

Nios II registers

it's just the constant 0.

- **General-purpose registers (r0-r31)**

Register	Name	Function	Register	Name	Function
r0	zero	0x00000000	r16		Callee-saved register
r1	at	Assembler temporary	r17		Callee-saved register
r2		Return value	r18		Callee-saved register
r3		Return value	r19		Callee-saved register
r4		Register arguments	r20		Callee-saved register
r5		Register arguments	r21		Callee-saved register
r6		Register arguments	r22		Callee-saved register
r7		Register arguments	r23		Callee-saved register
r8		Caller-saved register	r24	et	Exception temporary
r9		Caller-saved register	r25	bt	Breakpoint temporary *(1)*
r10		Caller-saved register	r26	gp	Global pointer
r11		Caller-saved register	r27	sp	Stack pointer
r12		Caller-saved register	r28	fp	Frame pointer
r13		Caller-saved register	r29	ea	Exception return address
r14		Caller-saved register	r30	ba	Breakpoint return address *(2)*
r15		Caller-saved register	r31	ra	Return address

* Application programming interface. Used to mix C, C++ and assembly. Let's say you have a critical function that you are going to program in assembly. You want to know where the results will be placed by the compiler for example.

Those 8 registers can be used without saving their values. This means that the caller has no warranty that the value of one of those reg. won't change. They will be saved before calling the subroutine. On the contrary, the r16 to r23 are registers that if needed will be saved somewhere. You can either pass parameters through stack or with r24-r27.

NOTA: The role of some registers is fixed by HW (r31, r0). Most of the other roles are determined after a convention.

Addressing Modes (1)

- How operands are specified in an instruction
- Nios 2 proc. supports **5 addressing modes**:
  - *Immediate mode*: a 16-bit operand is contained in the instruction itself. This value is (sign-)extended to produce a 32-bit operand for (arithmetic) instructions (32-bit instructions!)
  - *Register mode*: the operand is the content of a register 5 bits to specify register
  - *Register indirect mode*: the effective address of the operand is the content of a register

    ↳ Displacement mode with displacement is 0

Addressing Modes (2)

- Nios 2 proc. supports 5 addressing modes:
  - *Displacement mode*: the effective address of the operand is obtained by adding the content of a register and a 16-bit value contained in the instruction itself.
  - *Absolute mode*: is a particular case of the *Displacement mode* when the register is r0
- E.g. `addi r3, r2, 100` the content of r2 is added to 100 and the result placed in r3

Addressing Modes (3)

Involves appropriate extension to 32 bit

Nios II addressing modes.

Name	Assembler syntax	Addressing function
Immediate	Value	Operand = Value
Register	r*i*	EA = r*i*
Register indirect	(r*i*)	EA = [r*i*]
Displacement	X(r*i*)	EA = [r*i*] + X
Absolute	LOC(r0)	EA = LOC

EA = effective address

Value = a 16-bit signed number

X = a 16-bit signed displacement value

[r*i*] indicates the content of the register r*i*

Instruction formats (1)

- RISC-style instructions (all 32-bit long)
  - Load/store architecture for data transfers
  - Arithmetic/logic instructions use registers
- Three instruction types:

```
I-type OP   dst_reg, src_reg, immediate
R-type OP   dst_reg, src_reg1, src_reg2
J-type OP   label_or_address
```

- `label_or_address` is a 26-bit unsigned immediate value

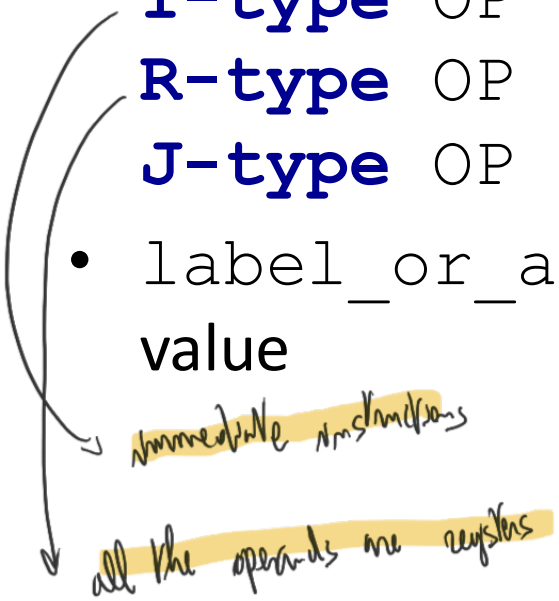

Instruction formats (2)

- **I-type instructions** include arithmetic and logical operations in which one operand is a constant, such as addi and andi; branch operations; load and store operations; and cache management operations.

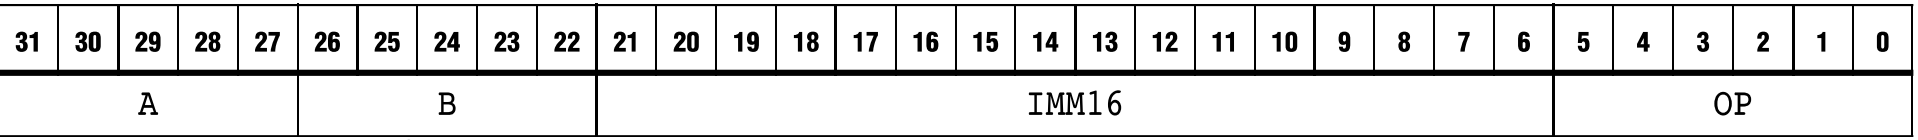

2 registers

- **R-type instructions** include arithmetic and logical operations such as add, and, nor; comparison operations such as cmpeq and cmplt

6 least sig. bits for OP code. 64 unique

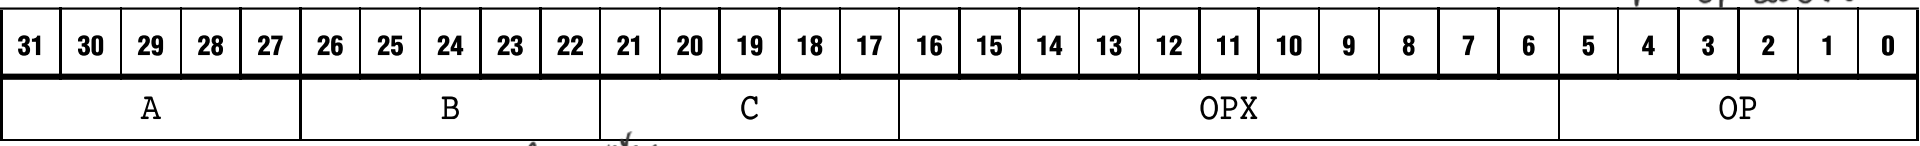

3 registers

- **J-type instructions** such as call and jmpi, transfer execution anywhere within a 256-MB range *

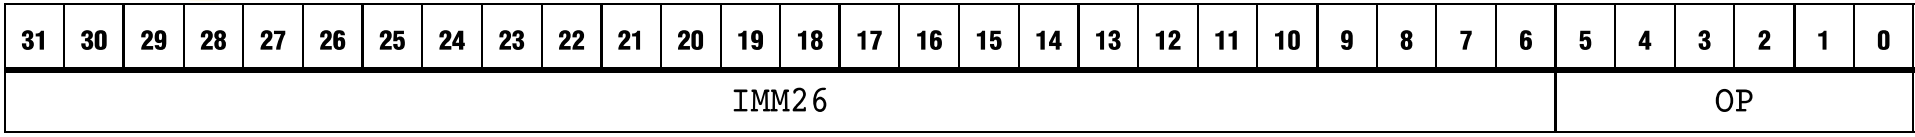

I-Type vs R-Type. For all the R-type you have just 1 OP code and then use the 16 bits (OPX) to specify the instruction.

For load, store, branch the offset is an immediate value.

* $256\,MB = 2^{26} = 64\,MB$! You need a rule to extend 26 to 32 bits. Note: all the instr. occupy a word! But since the addresses go with multiples of 4, you can remove the 2 least sig. bits (00) so we remove them. For the 4 MSB for the program counter, they are not changed. So you can only move on a page of 256 MB. The 4 MSB of the PC are not changed. So overall, 16 pages of 256 MB = 4 GB of memory. And a call or a jump remain only in the same page.

Notation Conventions

Notation	Meaning
X ← Y	X is written with Y
PC ← X	The program counter (PC) is written with address X; the instruction at X is the next instruction to execute
PC	The address of the assembly instruction in question
rA, rB, rC	One of the 32-bit general-purpose registers
prs.rA	General-purpose register rA in the previous register set
IMMn	An n-bit immediate value, embedded in the instruction word
IMMED	An immediate value
X_n	The nth bit of X, where n = 0 is the LSB
$X_{n..m}$	Consecutive bits n through m of X
0xNNMM	Hexadecimal notation
X : Y	Bitwise concatenation For example, (0x12 : 0x34) = 0x1234
σ(X)	The value of X after being sign-extended to a full register-sized signed integer
X >> n	The value X after being right-shifted n bit positions
X << n	The value X after being left-shifted n bit positions
X & Y	Bitwise logical AND
X | Y	Bitwise logical OR

continued...

Notation Conventions (con't)

Notation	Meaning
X ^ Y	Bitwise logical XOR
~X	Bitwise logical NOT (one's complement)
Mem8[X]	The byte located in data memory at byte address X
Mem16[X]	The halfword located in data memory at byte address X
Mem32[X]	The word located in data memory at byte address X
label	An address label specified in the assembly file
(signed) rX	The value of rX treated as a signed number
(unsigned) rX	The value of rX treated as an unsigned number

Load and Store Instructions

- For moving data between memory (or I/O) and general-purpose registers
- Words, half-words, bytes; *alignment required*
- Variants available for I/O (uncached) access
- Examples:

Multiple of 4. → address of the first byte (when you move up)

```
ldw    r2, 40(r3)       // load word
stb    r6, 4(r12)       // store byte
ldhio  r9,   (r20)      // load I/O halfword
                        // signed extended
ldbu   r2, -100(r3)     // load byte zero
                        // extended
stw    r7, 100(r0)      // store word
```

u = unsigned: you read a byte from the memory, but only 1 byte!

We need to extend based on how the info needs to be interpreted

ldb, ldh ecc., the extension is unsigned. NOTE: you don't have stbu, because you are storing a byte.

② When alignment is required the address of word is a multiple of 4; in case of small int, multiple of 2. (Word: multiple of 4), (half word: multiple of 2)

NOTE: for load and store you have translation for I/O. This bypasses the cache as processor has a cache. Because we don't want info to be stored in the cache for IO purposes.

Arithmetic Instructions

- add, addi (16-bit immediate is sign-extended)
- sub, subi, mul, and muli are similar
- Mult. is unsigned, result is truncated to 32 bits
- div (signed values), divu (unsigned values)
- Examples:

```
add  r2, r3, r4     //(r2 ← [r3] + [r4])
muli r6, r7, 4096   //(r6 ← [r7] × 4096)
divu r8, r9, r10    //(r8 ← [r9] / [r10])
```

Logic Instructions

- and, or, xor, nor have 2 register operands
- andi, ori, xori, nori have a register operand and an immediate operand that is **zero-extended** from 16 bits to 32 bits
- Examples:

```
or   r7, r8, r9      //(r7 ← [r8] OR [r9])
andi r4, r5, 0xFF    //(r4 ← [r5] AND 255)
```

- andhi, orhi, xorhi shift 16-bit immediate left and clear lower 16 bits to zero

Move Pseudo-Instructions

- Pseudoinstructions provided for convenience:

```
mov   ri, rj      =>  add   ri, r0, rj
movi  ri, Val16   =>  addi  ri, r0, Val16
moviu ri, Val16   =>  ori   ri, r0, Val16
```

- **Move Immediate Address for 32-bit value:**

```
movia ri, LABEL   => orhi ri, r0, LABEL_HI
                     ori  ri, ri, LABEL_LO
```

  - LABEL_HI is upper 16 bits of LABEL, and LABEL_LO is lower 16 bits of LABEL

Branch and Jump Instructions

- Unconditional branch: br LABEL
- Instruction encoding uses **signed 16-bit byte offset**
- Signed/unsigned comparison and branch:

```
blt  ri, rj, LABEL  // signed   [ri]<[rj]
bltu ri, rj, LABEL  // unsigned [ri]<[rj]
```

- beq, bne, bge, bgeu, bgt, bgtu, ble, and bleu
- Unconditional branch beyond 16-bit offset:

```
jmp  ri    // jump to address in ri
```

Subroutine Linkage Instructions

- Subroutine **call** instruction: `call LABEL`
- Saves return address (from PC) in r31 (ra)
- Target encoded as 26-bit immediate, Value26
- At execution time, 32-bit address derived as:
  $PC_{31\text{-}28}$: Value26 : 00
- **Call** with target in register: `callr ri`
- **Return** instruction: `ret`
  - Branches to address saved in r31 (ra)

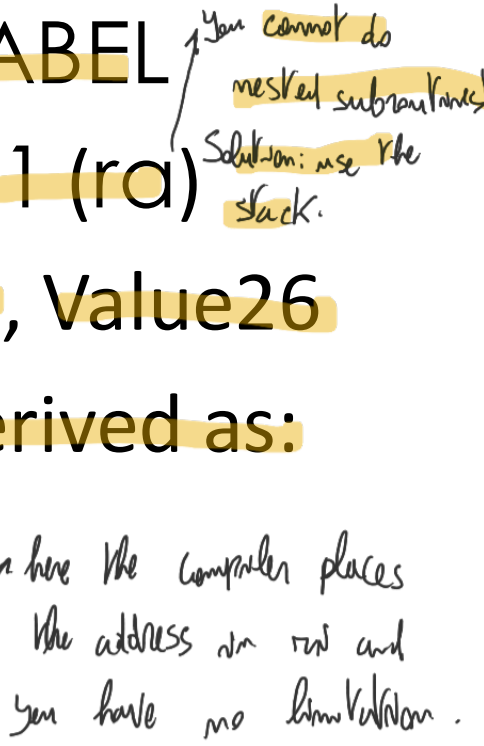

Comparison Instructions

- Result of comparing two operands is placed in destination register: 1 (if true) or 0 (if false)
- Less-than comparisons that set r*i* to 0 or 1:

```
cmplt  ri, rj, rk    // signed [rj] < [rk]
cmpltu ri, rj, rk    // unsigned [rj] < [rk]
cmplti ri, rj, Val16 // signed [rj] < Val16
cmpltui ri, rj, Val16 //unsigned [rj]<Val16
```

- Val16 is sign- or zero-extended based on type
- Similarly for: ...eq.., ...ne.., …le.., …ge.., ...gt..

Shift and Rotate Instructions

- Shift right logical r*j*, destination register is r*i*:

```
srl  ri, rj, rk    //shift by amount in rk
srli ri, rj, Val5  //shift by immediate value
```

- Shift right arithmetic sra, srai: same as above except that sign in bit rj_{31} is preserved
- Shift left logical sll, slli
- Rotate left rol, roli
- Rotate right ror (no immediate version)

Pseudoinstructions

- mov, movi, and movia already discussed;
  translated to other instructions by assembler
- Subtract immediate is actually add immediate with negation of constant:
  ```
  subi ri, rj, Value16 => addi ri, rj, -Value16
  ```
- Also can swap operands for comparisons:
  ```
  bgt ri, rj, LABEL =>  blt rj, ri, LABEL
  ```
- Awareness of pseudoinstructions is not critical,
  except when examining assembled code

Carry/Overflow Detection for Add

- Nios II does not have condition codes (flags)
- Arithmetic performed in same manner for signed and unsigned operands
- Detect carry/overflow needs more instructions
- **Carry Detection** (unsigned operands): test if unsigned result is less than either one of the operands:

```
add     r4, r2, r3
cmpltu  r5, r4, r2
```

the result will be less than both of the inputs.

- Carry bit is in r5

Carry/Overflow Detection for Add

- **Overflow Detection** (signed operands): compare signs of operands & result
- Use xor, and to check for same operand signs and different sign for result:

```
add   r4, r2, r3
xor   r5, r4, r2
xor   r6, r4, r3
and   r5, r5, r6
blt   r5, r0, OVERFLOW
```

The sign of the result is different from the sign of both operands.

- Similar checks for subtract carry/overflow

References

- Intel, “Nios II Processor Reference Guide,” *n2cpu-nii5v1gen2-683836-666887-2.pdf*
  - 8. Instruction Set Reference
- C. Hamacher, Z. Vranesic, S. Zaky, N. Manjikian "Computer Organization and Embedded Systems,” *McGraw-Hill International Edition*
  - Appendix B: from B.1 to B.10