



Samsung Galaxy S25 Battery Replacement

Follow this guide to replace a dead or worn-out...

Written By: Spencer Day



INTRODUCTION

Follow this guide to replace a dead or worn-out battery in your Samsung Galaxy S25 smartphone.

Your phone's lithium-ion battery has a limited lifespan. If your phone dies quickly, doesn't hold a charge, randomly shuts off with battery remaining, or only works when plugged in, you may need to replace the battery.

If your battery is swollen, [take appropriate precautions](#).

Note: You'll need replacement back cover adhesive to complete this repair.

Some photos in this guide are from a different model and may contain slight visual discrepancies, but they won't affect the procedure.



TOOLS:


[Phillips #00 Screwdriver](#) (1)
[iOpener](#) (1)
[Suction Handle](#) (1)
[iFixit Opening Picks \(Set of 6\)](#) (1)
[Spudger](#) (1)
[Tweezers](#) (1)
[Hair Dryer](#) (1)
[Heat Gun](#) (1)



PARTS:

[Samsung Galaxy S25 Battery](#) (1)

Step 1 — Safety precautions

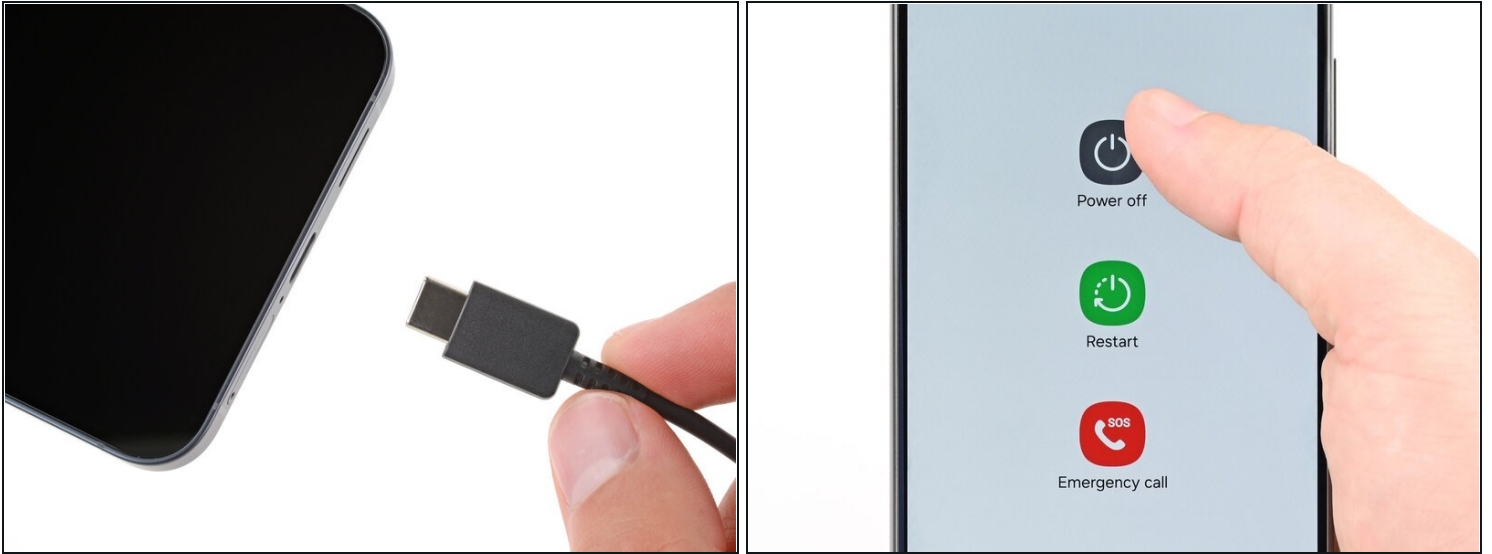

⚠ Let your Galaxy's battery drain below 25% before starting this repair—a charged lithium-ion battery may catch fire if damaged.

- Unplug all cables from your phone.
- Completely power off your phone by holding the side key and volume down button and selecting **Power off**.

Step 2 — Cracked glass preparation



- ① Glass shards can complicate disassembly—or worse, cause injury. If your phone's back glass is cracked, follow this step.
 - Apply strips of packing tape to the cracked glass until it's completely covered—this will help keep the glass contained and allow the suction cup to stick.
 - Make sure there's a single strip (not overlapping) of tape across the **bottom edge**, big enough for a suction cup to fit on.
 - ① Only cover the glass itself—don't stick any tape to the frame.
- ⚠ Consider wearing safety glasses to protect your eyes from any glass shaken free during the repair.

Step 3 — Heat the back cover



- ⓘ Adhesive secures the back cover to the frame. Heating the cover softens the adhesive, making it easier to separate.
- [Heat an iOpener](#) and lay it on the bottom edge of the back cover for two minutes.
- ⓘ Alternatively, you can use a [hair dryer](#) or [heat gun](#) to heat the cover.

⚠ Improper use of a heat gun can destroy the display and/or battery—follow the linked [instructions](#) carefully.

Step 4 — Adhesive information



- ⓘ While the back cover heats, note the following about its adhesive:
 - The cover is secured with adhesive around the perimeter of the frame. Use this picture as a reference while you separate the adhesive.
- ⚠ Only insert your tool slightly under the cover near the cameras to avoid damaging them.

Step 5 — Apply a suction handle



- Apply a suction handle to the center of the back cover's bottom edge, as close to the edge as possible.

Step 6 — Insert an opening pick



- Pull up on the suction handle with strong, steady force until a gap forms between the back cover and frame.
 - ① Use the fingers of your lifting hand to hold the phone down, or steady the frame with your free hand—be careful, your phone may be hot.
- Insert the tip of an opening pick into the gap.

Step 7 — Separate the bottom edge adhesive



ⓘ If the back cover feels stuck at any point when separating the adhesive, apply heat to the area and try again.


- Slide the opening pick along the bottom edge to separate the adhesive.

Step 8 — Separate the right edge adhesive



- Slide the opening pick around the bottom right corner and up the right edge to separate the adhesive.

Step 9 — Separate the top edge adhesive

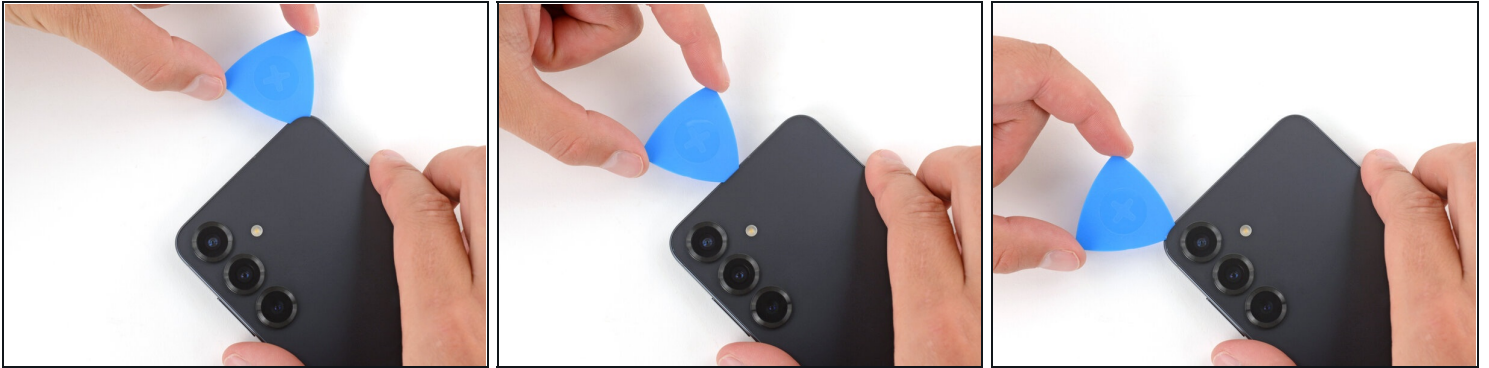

⚠ In the next two steps, only insert the pick slightly (a few millimeters) near the cameras to avoid damaging them.

- Slide the opening pick around the top right corner and along the top edge to separate the adhesive.

Step 10 — Separate the left edge adhesive




- Slide the opening pick around the top left corner and down the left edge to separate the adhesive.

Step 11 — Remove the back cover




- Use the suction handle to lift and remove the back cover.
 - ⓘ If the cover still feels stuck, go back around the perimeter with an opening pick and separate any remaining adhesive.
- ☑ During reassembly:
 - This is a good point to power on your phone and test all functions before sealing it up. Be sure to power your phone back down completely before you continue working.
 - Check your rear cameras for any smudges and gently wipe them with a clean, lint-free cloth if necessary.
 - Your replacement back cover adhesive will be applied to either the frame or the back cover. Use cutouts and contours to see where it lines up best. If it matches the back cover, follow [this guide](#). If it matches the frame, use [this guide](#).

Step 12 — Disconnect the wireless charging coil

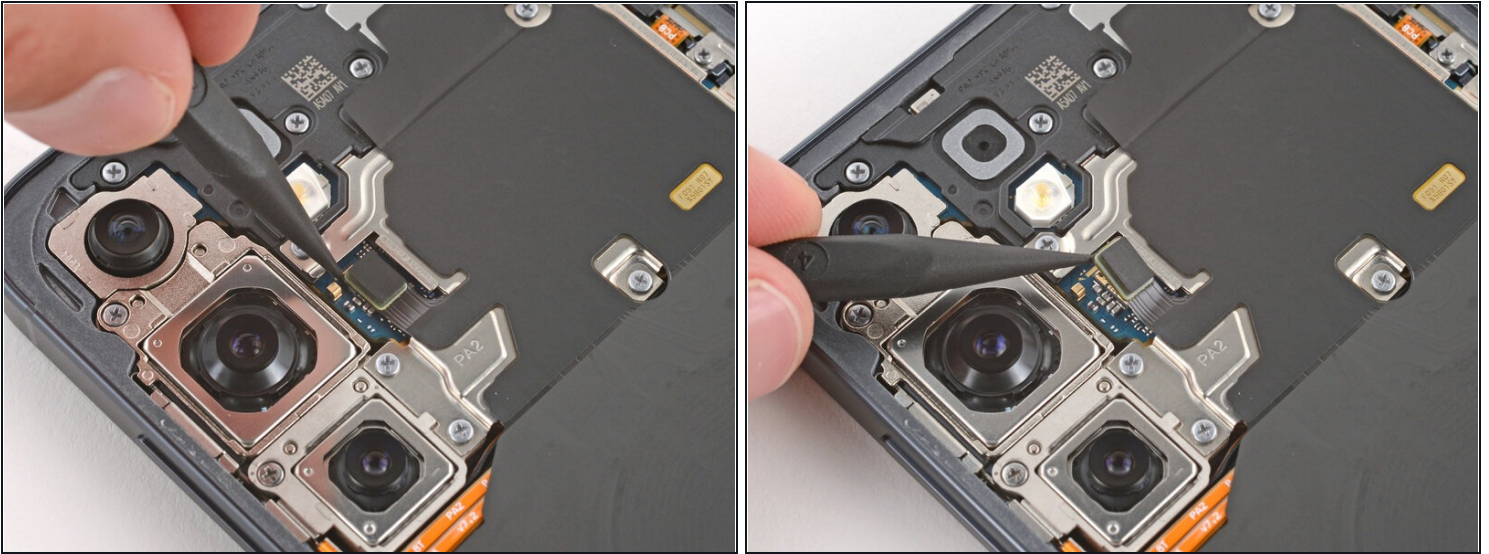

- Use the point of a spudger to pry up and disconnect the wireless charging coil [press connector](#).

Step 13 — Remove the wireless charging and loudspeaker screws

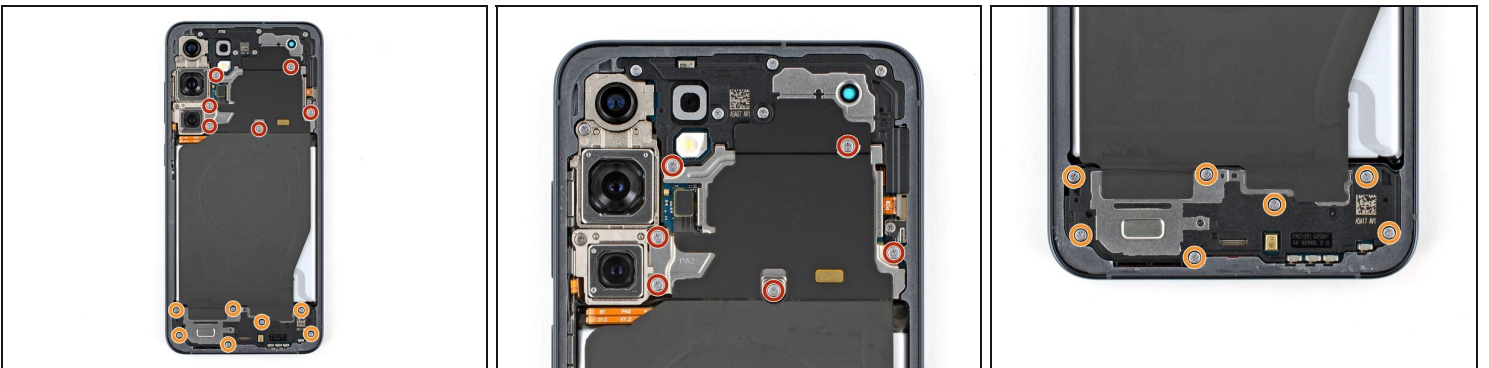

- ⓘ Throughout this repair, [keep track of each screw](#) and make sure it goes back exactly where it came from to avoid damaging your phone.
- Use a Phillips screwdriver to remove the thirteen screws securing the wireless charging and loudspeaker assembly:
 - Six 3.5 mm-long screws securing the wireless charging coil
 - Seven 3.5 mm-long screws securing the loudspeaker

Step 14 — Unclip the loudspeaker




- Use the point of a spudger to pry up and lift the left side of the loudspeaker until it unclips.
- ☑ During reassembly, press firmly around the perimeter of the loudspeaker to engage its clips.

Step 15 — Remove the wireless charging and loudspeaker assembly



- Use two hands to remove the wireless charging and loudspeaker assembly.


Step 16 — Disconnect the battery

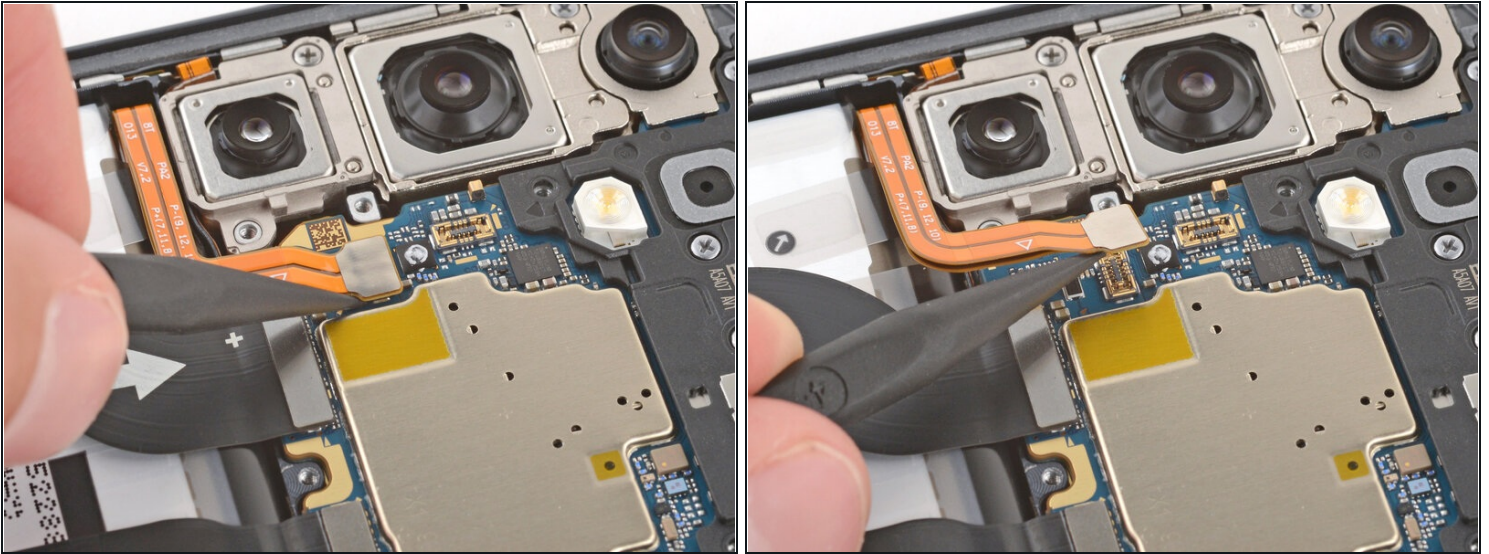

❗ Every [press connector](#) has a corresponding [gold arrow](#) on the board that shows the proper location to pry—nifty! Prying at the wrong location risks damaging the fragile surface-mounted components on the board.

- Use the point of a spudger to pry up and disconnect the battery press connector.

Step 17 — Disconnect the interconnect and screen cables

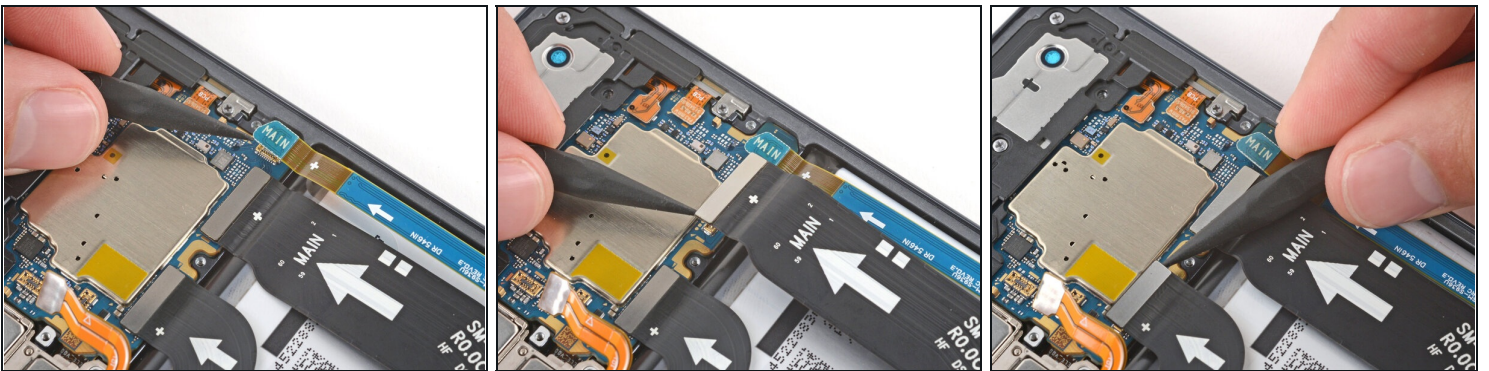

- Use the point of a spudger to pry up and disconnect the interconnect and screen cable press connectors (three total) from the bottom edge of the motherboard.

Step 18



- Use the point of a spudger to pry up and disconnect the other ends of interconnect and screen cables from the bottom of the phone.

Step 19 — Remove the cables



- Remove the three cables you just disconnected.

Step 20 — Peel up the plastic battery tabs



⚠ Be very careful not to puncture or dent the battery, as it can leak dangerous chemicals or catch fire. Don't use sharp or metal tools.

- Use your fingers to peel up the plastic tabs on the edges of the battery, starting at the [black, circular arrow markings](#).
- ① If you're having trouble, use the tip of an opening pick to *gently* lift the tab until you can grip it with your fingers.

Step 21 — Remove the battery



- Hold the plastic tabs out of the way and remove the battery.
 - ⓘ If the battery feels stuck, don't try to force it out. Make sure all the plastic tabs are fully detached and out of the way—the battery should lift away effortlessly.
- ★ During reassembly:
 - ⓘ The plastic sleeve on your replacement battery may differ from the original—don't worry! Just make sure the battery itself matches the original.
- Remove any adhesive liners from the bottom of the battery.
- Hold the battery above its recess and use your finger to reconnect the battery press connector—temporarily reconnecting the battery ensures it's sitting properly in its recess.
- Lay the battery into its recess and press down firmly to secure it.
- **Disconnect the battery before continuing.**

Step 22 — Remove the old adhesive



- *Slowly* peel up and remove the plastic battery sleeve—most of the adhesive should come up with the sleeve.
- ⚠ **Don't use tools to remove the adhesive on the shiny, metallic vapor chamber in the center of the battery recess—it's delicate and you may cause damage.**
- If any adhesive is still on the frame, use a spudger or your fingers to remove it.

Compare your new replacement part to the original part—you may need to transfer remaining components or remove adhesive backings from the new part before you install it.

To reassemble your device, follow these instructions in reverse order.

For optimal performance, [calibrate your newly installed battery](#) after reassembling your phone.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [Answers Community](#) for troubleshooting help.