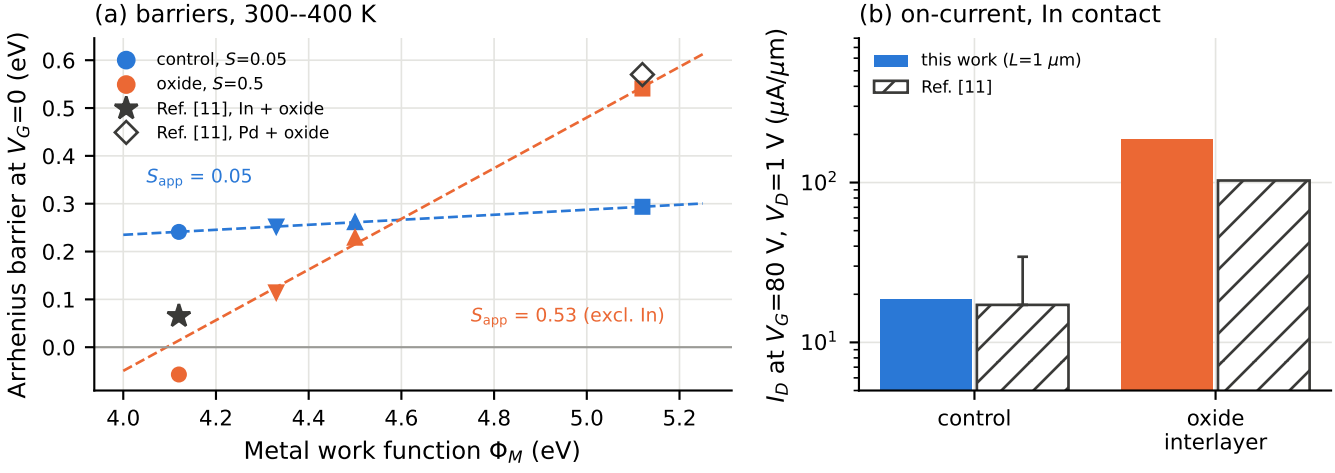
(a) barriers, 300--400 K
control, S=0.05
oxide, S=0.5
Ref. [11], In + oxide
Ref. [11], Pd + oxide
S_app = 0.05
S_app = 0.53 (excl. In)
Arrhenius barrier at V_G=0 (eV)
Metal work function Φ_M (eV)
(b) on-current, In contact
this work (L=1 μm)
Ref. [11]
I_D at V_G=80 V, V_D=1 V (μA/μm)
control
oxide interlayer