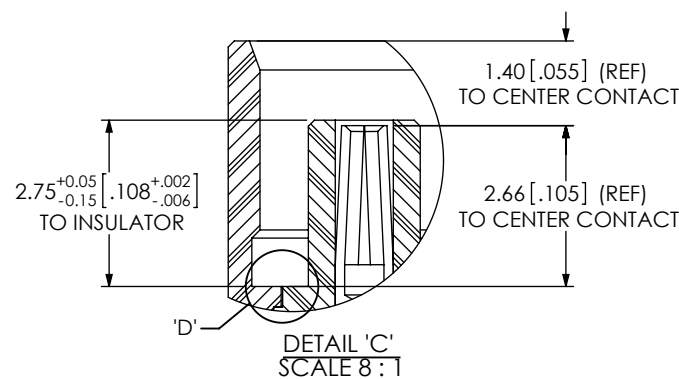
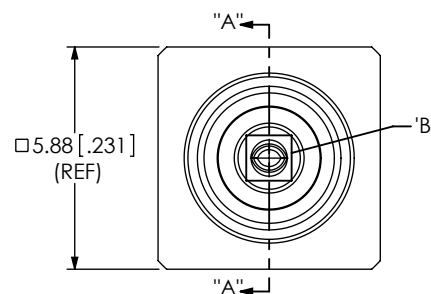

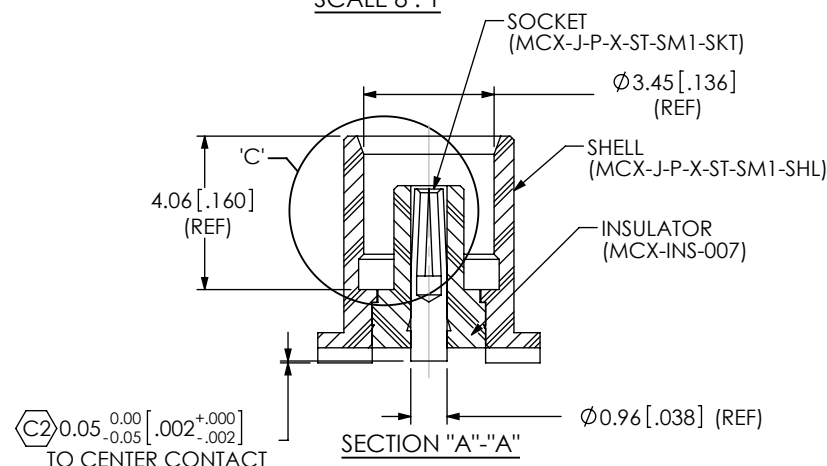
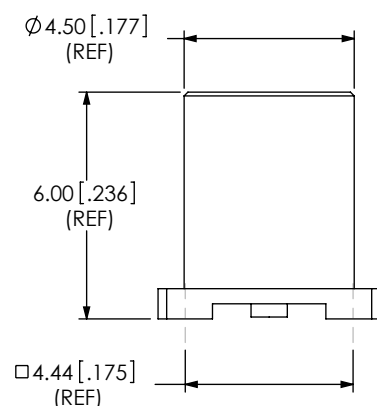




DO NOT
SCALE FROM
THIS PRINTDESIGNED & DIMENSIONED
IN MILLIMETERS[INCHES]


MCX-J-P-X-ST-SM1

GENDER
-J: JACKTYPE
-P: PCBTERMINATION
-SM1: SURFACE MOUNTORIENTATION
-ST: STRAIGHT

PLATING SPECIFICATION

-H: HEAVY GOLD
(SEE TABLE 1)DETAIL 'C'
SCALE 8:1DETAIL 'B'
SCALE 16:1DETAIL 'D'
SCALE 16:1

RECOMMENDED PCB LAYOUT

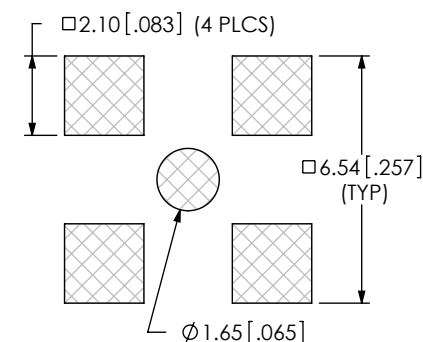

NOTES:

1. C REPRESENTS A CRITICAL DIMENSION.
2. PUSHOUT FORCE FOR INSULATOR: 20 N [4.5 LB] MIN.
3. PUSHOUT FORCE FOR CENTER CONTACT: 10 N [2.25 LB] MIN.
4. PARTS TO BE PACKAGED IN TRAYS; IF QUANTITY IS LESS THAN HALF TRAY, PARTS TO BE PACKAGED IN COHESIVE FOAM.
5. RoHS COMPLIANT.

TABLE 1: MATERIAL

SAMTEC PART NUMBER	ITEM	MATERIAL	PLATING - (REFERENCE)
MCX-J-P-X-ST-SM1-SHL	SHELL	BRASS C3604B	0.00013[0.00005] GOLD OVER .00127[0.00050] NICKEL
MCX-INS-007	INSULATOR	PTFE TEFLON (WHITE)	N/A
MCX-J-P-X-ST-SM1-SKT	SOCKET	BeCu C17300	0.00076[0.00030] GOLD OVER .00127[0.00050] NICKEL

F:\DWG\MISC\Mktg\MCX-J-P-X-ST-SM1-MKT.SLDDRW

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES ARE:

DECIMALS

.X: ± 0.3 [0.01].XX: ± 0.13 [0.005].XXX: ± 0.051 [0.0020]

ANGLES

2°

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL:

SEE TABLE 1

DO NOT SCALE DRAWING

SHEET SCALE: 1:0.2

samtec

520 PARK EAST BLVD., NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:

MCX STRAIGHT, SMT JACK- 50 OHM

DWG. NO.

MCX-J-P-X-ST-SM1

BY: R MUSSER

02/06/2008

SHEET 1 OF 1