



Verified Carbon Standard

26MWP SOLAR PHOTOVOLTAIC POWER PLANT IN BAVET CITY, CAMBODIA



Climate
Bridge

Tel:+86 21 6246 2036; Fax: +86 21 2301 9950

Project title	26MWp Solar Photovoltaic Power Plant in Bavet City, Cambodia
Project ID	4036
Monitoring period	01-Jan-2023 to 31-Dec-2024 (First and last day included)
Original date of issue	05-Aug-2025
Most recent date of issue	05-Aug-2025
Version	1.8
VCS Standard Version	4.7
Prepared by	Yuchen Wang, Yumei Peng, Keming Lin, Yujuan Xu, Genrong Chen Block B, Level 24, Jiangong Mansion, 33 Fushan Road, Pudong New Area, Shanghai, P.R. of China Telephone: +86 2162462036; Email: wang.yuchen@climatebridge.com ; projects@climatebridge.com http://www.climatebridge.com

CONTENTS

1	PROJECT DETAILS.....	4
1.1	Summary Description of the Implementation Status of the Project	4
1.2	Audit History.....	4
1.3	Sectoral Scope and Project Type	5
1.4	Project Proponent	5
1.5	Other Entities Involved in the Project	5
1.6	Project Start Date	5
1.7	Project Crediting Period	6
1.8	Project Location	6
1.9	Title and Reference of Methodology	7
1.10	Double Counting and Participation under Other GHG Programs	7
1.11	Double Claiming, Other Forms of Credit, and Scope 3 Emissions.....	8
1.12	Sustainable Development Contributions	8
1.13	Commercially Sensitive Information.....	11
2	SAFEGUARDS AND STAKEHOLDER ENGAGEMENT	11
2.1	Stakeholder Engagement and Consultation.....	11
2.2	Risks to Stakeholders and the Environment.....	16
2.3	Respect for Human Rights and Equity	18
2.4	Ecosystem Health	21
3	IMPLEMENTATION STATUS	23
3.1	Implementation Status of the Project Activity	23
3.2	Deviations	24
3.3	Grouped Projects	24
3.4	Baseline Reassessment.....	24
4	DATA AND PARAMETERS.....	25
4.1	Data and Parameters Available at Validation	25
4.2	Data and Parameters Monitored.....	25
4.3	Monitoring Plan.....	27
5	QUANTIFICATION OF GHG EMISSION REDUCTIONS AND REMOVALS	28
5.1	Baseline Emissions	28

5.2	Project Emissions	32
5.3	Leakage Emissions	32
5.4	GHG Emission Reductions and Carbon Dioxide Removals	32
APPENDIX 1: COMMERCIALLY SENSITIVE INFORMATION.....		34
APPENDIX 2: SUPPORTING EVIDENCE.....		35

1 PROJECT DETAILS

1.1 Summary Description of the Implementation Status of the Project

26MWp Solar Photovoltaic Power Plant in Bavet City, Cambodia (hereafter referred to as “the Project”) is a solar power project with total installed capacity of 26MWp, located in Monourom village, Bavet City, Svay Rieng Province, the Kingdom of Cambodia. The project is invested by Green Sustainable Ventures (Cambodia) Co., Ltd. (hereafter referred to as “the project proponent”).

The purpose of the project is to utilize the solar energy at the project site to generate and supply electricity to the Eletricite Du Cambodge Grid (EDC grid) which is dominated by coal-fired power stations. Prior to the implementation of the project, the electricity delivered to the grid by the project activity would be generated by the operation of grid-connected power plants and by the addition of new generation sources into the EDC grid. This is the scenario that existed prior to the implementation of the project activity and is also the baseline scenario.

The project is a renewable energy project and is expected to supply an annual average of 37,085 MWh of zero-emission electricity to EDC grid during the whole project lifetime of 25 years, which replace the power generation of those fossil fuel-fired power plants delivered to the EDC grid under the baseline scenario.

The construction of the project was started on 13-Apr-2021 and the operation was started on 27-Jan-2022. The total amount of emission reductions is expected to be 159,532 tCO₂e during the first crediting period from 27-Jan-2022 to 26-Jan-2029, with average annual emission reductions of 22,790 tCO₂e.

The first monitoring period is from 27-Jan-2022 to 31-Dec-2022 (both days included) with an emission reduction of 20,393 tCO₂e. During the second monitoring period (from 01-Jan-2023 to 31-Dec-2024, the first and last day included), the achieved emission reductions are 42,837 tCO₂e.

1.2 Audit History

Audit type	Period	Program	Validation/verification body name	Number of years
Validation	30-June-2023	VCS	CTI Certification Co., Ltd	/
Verification	27-Jan-2022 to 31-Dec-2022	VCS	CTI Certification Co., Ltd	0.9 years (339 days)

Verification	01-Jan-2023 to 31-Dec-2024	VCS	Carbon Check (India) Private Ltd.	2 years (731 days)
--------------	----------------------------	-----	-----------------------------------	--------------------

1.3 Sectoral Scope and Project Type

Sectoral scope ¹	Sectoral Scope 1: Energy (Renewable/non-renewable)
Project activity type	Solar Photovoltaic Power Plant

1.4 Project Proponent

Organization name	Green Sustainable Ventures (Cambodia) Co., Ltd.
Contact person	Paul Lim Pay Chuan
Title	Director
Address	No.6 Street No. 588 Sangkat Boeung Kok 11, Khan Toul Kork, Phnom Penh, Cambodia
Telephone	+60-125228603
Email	charlestan@pestech-international.com

1.5 Other Entities Involved in the Project

Organization name	Climate Bridge (Shanghai) Ltd.
Role in the project	Consultancy
Contact person	Gao Zhiwen
Title	General Manager
Address	Block B, Level 24, Jiangong Mansion, 33 Fushan Road, Pudong New Area, Shanghai, China 200120
Telephone	+86-2162462036
Email	gao.zhiwen@climatebridge.com; projects@climatebridge.com

1.6 Project Start Date

Project start date	27-Jan-2022
--------------------	-------------

¹ Projects, activities, or methodologies may be developed under any of the 16 VCS sectoral scopes: <https://verra.org/programs/verified-carbon-standard/vcs-program-details/#sectoral-scopes>

Justification

According to VCS standards, the project start date is the date on which activities that lead to the generation of GHG emission reductions or removals are implemented. For this project, the project start date is 27-Jan-2022, which means that the operation start date is the date on which the project began generating electricity and the project activity began generating GHG emission reductions.

1.7 Project Crediting Period

Crediting period

- ☒ Seven years, twice renewable
- ☐ Ten years, fixed
- ☐ Other (state the selected crediting period and justify how it conforms with the VCS Program requirements)

Start and end date of first or fixed crediting period

27-Jan-2022 to 26-Jan-2029

1.8 Project Location

The project is located at Monourom village, Bavet City, Svay Rieng Province, Cambodia. The geographical coordinates for the project site are east longitude geographical coordinates for the project site are east longitude 106°02'49.1" and north latitude 11°05'20.2". The geographic location of the project plant is shown in Figure 1-1.

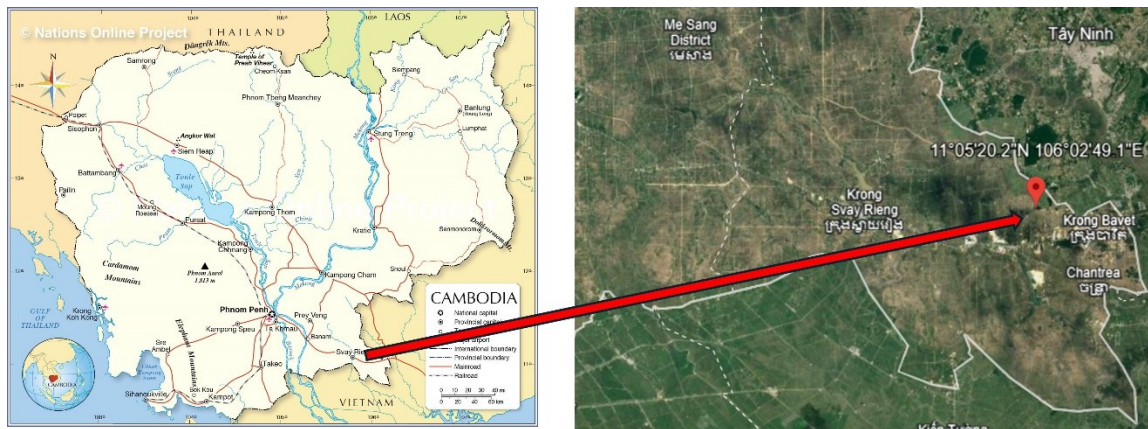


Figure 1-1 The geographic location of the project

1.9 Title and Reference of Methodology

Type (methodology, tool or module).	Reference ID, if applicable	Title	Version
Methodology	ACM0002	Applied approved CDM methodology: ACM0002 Grid-connected electricity generation from renewable sources ²	21.0
Tool	TOOL01	Tool for the demonstration and assessment of additionality ³	07.0
Tool	TOOL05	Baseline, project and/or leakage emissions from electricity consumption and monitoring of electricity generation ⁴	03.0
Tool	TOOL07	Tool to calculate the emission factor for an electricity system ⁵	07.0
Tool	TOOL24	Common practice ⁶	03.1
Tool	TOOL27	Investment analysis ⁷	12.0

1.10 Double Counting and Participation under Other GHG Programs

1.10.1 No Double Issuance

Is the project receiving or seeking credit for reductions and removals from a project activity under another GHG program?

☐ Yes ☒ No

1.10.2 Registration in Other GHG Programs

Was the project registered or seeking registration under any other GHG programs?

☐ Yes ☒ No

² <https://cdm.unfccc.int/methodologies/DB/XB1TX7TAZ6SLWM9B7BC67THHVD16JV>

³ https://cdm.unfccc.int/methodologies/PAmethodologies/tools/am-tool-01-v5.2.pdf/history_view

⁴ <https://cdm.unfccc.int/methodologies/PAmethodologies/tools/am-tool-05-v3.0.pdf>

⁵ https://cdm.unfccc.int/methodologies/PAmethodologies/tools/am-tool-07-v1.1.pdf/history_view

⁶ <https://cdm.unfccc.int/methodologies/PAmethodologies/tools/am-tool-24-v1.pdf>

⁷ https://cdm.unfccc.int/methodologies/PAmethodologies/tools/am-tool-27-v1.pdf/history_view

1.11 Double Claiming, Other Forms of Credit, and Scope 3 Emissions

1.11.1 No Double Claiming with Emissions Trading Programs or Binding Emission Limits

Are project reductions and removals or project activities also included in an emissions trading program or binding emission limit? See the *VCS Program Definitions* for definitions of emissions trading program and binding emission limit.

☐ Yes ☒ No

1.11.2 No Double Claiming with Other Forms of Environmental Credit

Has the project activity sought, received, or is planning to receive credit from another GHG-related environmental credit system? See the *VCS Program Definitions* for definition of GHG-related environmental credit system.

☐ Yes ☒ No

1.11.3 Supply Chain (Scope 3) Emissions

Do the project activities affect the emissions footprint of any product(s) (goods or services) that are part of a supply chain?

☐ Yes ☒ No

1.12 Sustainable Development Contributions

The project is a solar power project with total installed capacity of 26MWp, located in Monourom village, Bavet City, Svay Rieng Province, the Kingdom of Cambodia.

SDG Targets	Project activity contribution	Alignment with Cambodia's Priorities
	72,879.677 MWh of net electricity from renewable sources was supplied to EDC grid in the second monitoring period. Therefore, the project achieved SDG 7 Affordable and Clean Energy.	Cambodia's Sustainable Development Goals demonstrate full alignment with the United Nations SDG framework, underscoring a concerted commitment to advancing global sustainability objectives and fostering inclusive socioeconomic progress.
	The construction and operation of the project provided 17 employment positions in 2023 and 21 employees positions in 2024 for local villagers, which had a positive effect on the local economy. During the second	

	monitoring period, direct and indirect employment opportunities be. generated. Thus, the project achieved SDG 8 Decent Work and Economic Growth in 2023 and 2024 separately.	According to the CSDG Framework⁸, Cambodia is willing to increase the renewable energy development to 25% by 2030. Thus, 72,879.677 MWh of net electricity generated by the project contributes to this goal.
	The project utilizes solar resource to generate electricity delivered to the EDC grid, which would be generated by the operation of grid-connected power plants and by the addition of new generation sources into the EDC grid. The project achieved a GHG emission reduction of 42,837 tCO₂e during the second monitoring period. Thus, the project achieved SDG 13 Climate Action.	And sustain economic growth in accordance with national circumstances, in particular, at least 7 percent gross domestic product growth per annum in Cambodia by providing job opportunities. Thus, 17 employment positions in 2023 and 21 employee positions in 2024 for local villagers provided by the project contributes to this goal. The percentage of greenhouse gas emission through reduced activities when comparing to the projection (scenario) of usual gas emission is 18% by 2030. A GHG emission reduction of 42,837 tCO₂e achieved by the project contributes to this goal.

⁸ <https://grd.sgs.gov.kh/home/wp-content/uploads/sites/2/2024/07/Cambodian-Sustainable-Development-Goals-CSDGs-2016-2030.pdf>

Table 1: Sustainable Development Contributions

Row number	SDG target	SDG indicator	Net impact on SDG indicator	Current project contributions	Contributions over project lifetime
1)	7.2	Renewable energy supplied to the power grid	Implemented activities to increase	72,879.677 MWh of net electricity from renewable sources have been supplied to the EDC grid during the reporting period, replacing fossil fuel-powered electricity.	From 27-Jan-2022 onwards, an accumulated 107,574.595 MWh of net electricity from renewable sources has been supplied to the EDC grid by the end of the reporting period, including 34,694.918 MWh in the 1 st monitoring period and 72,879.677 MWh in the 2 nd monitoring period.
2)	8.3	Provide job opportunities by implementation of the project	Implemented activities to increase	17 people in 2023 and 21 people in 2024 have been employed by the project as long-term employees and received stable payment during the reporting period.	7 people were employed by the project in the first monitoring period. 17 people in 2023 and 21 people in 2024 have been employed by the project during the 2 nd monitoring period.
3)	13.0	Tonnes of greenhouse gas emissions avoided or removed	Implemented activities to increase	The project has achieved a total GHG emission reduction of 42,837 tCO ₂ e during the reporting period.	From 27-Jan-2022 onwards, an accumulated 63,230 tCO ₂ e of GHG emission reduction has been achieved by the project by the end of the reporting period, including 20,393 tCO ₂ e in the 1 st monitoring period and 42,837 tCO ₂ e in the 2 nd monitoring period.

1.13 Commercially Sensitive Information

No commercially sensitive information has been excluded from the public version of the project description.

2 SAFEGUARDS AND STAKEHOLDER ENGAGEMENT

2.1 Stakeholder Engagement and Consultation

2.1.1 Stakeholder Identification

Stakeholder Identification	According to the registered VCS joint PD&MR, prior to the construction, the project owner has prepared a stakeholder analysis and communication strategy as a guide for meaningful information disclosure, consultation and active participation of all project stakeholders. The stakeholders of the project mainly involved local village chiefs and villagers. In this monitoring period, the identified stakeholder types have no change. The following people are considered as the stakeholders of this project during the implementation stage. • Residents of the nearby village (including project staff). • Village chiefs
Legal or customary tenure/access rights	Prior to the construction, the project acquired the construction permit issued by Ministry of Land Management on 13-Apr-2021 and there is no resettlement concern. Applicable legal frameworks and existing agreements govern land use and access rights. The project activities do not involve alterations to the existing legal or customary tenure/access rights of stakeholders, indigenous people (IPs), local communities (LCs), or customary rights holders, as the land is already designated for industrial purposes.
Stakeholder diversity and changes over time	According to the registered VCS joint PD&MR, the occupations of the villagers in the local community are

	mainly farmers, small business owners, garment service workers and construction workers.
Expected changes in well-being	The project is expected to improve the local environment, increase clean electricity supply, and provide work opportunities.
Location of stakeholders	Villages and village chiefs near the community.
Location of resources	The project is located in Monourom village, and no identified stakeholders own and have customary access to the land and resources occupied by the project.

2.1.2 Stakeholder Consultation and Ongoing Communication

Ongoing consultation	During the project implementation, the project owner obtains from local stakeholders through three approaches: (1) the systematic collection and documentation of feedback in Monthly Operation & Maintenance Report, (2) structured interviews conducted periodically with community representatives, and (3) the grievance book.
Date(s) of stakeholder consultation	19-Aug-2023, 15-Nov-2024
Communication of monitored results	Communications with local stakeholders were carried out at periodic intervals. Key implementation schedules or changes of the project, including monitoring results for all power generation activities-covering relevant ex-post monitoring parameters and data, as well as regular updates on the PV power station's operational status-were shared accordingly, were communicated to the local authority, who informed the neighborhood committee and the local residents, and the comments and suggestions from residents were collected by the village chief. Besides, EDC, as a major stakeholder, maintains a continuous monitoring system operating 24 hours/7 days throughout the year to ensure the project performance. Thus, EDC is fully aware of the operation of the project and monitored results.

	Based on the feedback received, the aforementioned concerns are unrelated to the project's installed capacity. Therefore, no modifications to the project design are required. All stakeholders can provide feedback to the project owner via phone or email written on the grievance signage. The Monthly Operation & Maintenance Report serve as documented evidence of communication of monitored results and stakeholder's other feedback, as any concerns or questions regarding the project are recorded in these reports.
Consultation records	(1) Community issues are recorded in the Monthly Operation & Maintenance Report every month. (2) The project proponent conducted a face-to-face interview with the village chief and villagers, and produced video recordings. (3) The grievance book is for stakeholders, including the staff and the villagers. The Green Sustainable Ventures are responsible for recording the issues if the stakeholders have any grievances.

Stakeholder input

(1) From Monthly Operation & Maintenance Report

There was a dispute about monks were not ok to cut the trees near the line in front of Pagoda, which was received in April 2023. The issues and solutions were in the Monthly Operation & Maintenance Report, community issues are recorded every month. In May 2023, the PP cut down 3 large trees and some small shrubs and also trimmed branches near the power line, and paid \$750 to the monks to mitigate the dispute. The PP believes that since only 3 large trees have commercial value and the shrub trees are very small and not have commercial value, the Monthly Operation & Maintenance Report simply recorded the O&M team paid \$250 per tree to mitigate the dispute, which is consistent with monks' statement that the project owner paid a total of \$750 for cutting trees. In summary, no matter how many trees and shrubs are cut down, this dispute has been resolved in this monitoring period.

In December 2024, PP received a request from community for repairing the village access road shared with the main solar plant access, which has been informed of management team for further action in this monitoring period.

(2) From Interview

On 19-Aug-2023, the project proponent conducted a face-to-face interview with the village chief of Monorom Village. On 15-Nov-2024, the project proponent interviewed four villagers by the same approach. All of them have no comments for the project.

(3) From Grievance Logbook

No grievance is received in the grievance logbook during this monitoring period.

Based on the feedback received, the aforementioned concerns are unrelated to the project's installed capacity. Therefore, no modifications to the project design are required.

2.1.3 Free, Prior, and Informed Consent

Consent	The project is located in Monourom village. The project belongs to the project owner, there is no resettlement concern and land owner dispute to the stakeholders. According to the registered VCS joint PD&MR, a grievance signage has been placed out the project gate for anyone to provide feedback. Monthly Operation & Maintenance Report can record comments received from everyone and corresponding solutions. Monourom village is a small community and most of the workers from the nearby villagers, thus it is convenient to carry out face-to-face interviews.
Outcome of FPIC	Local villagers are in favor of the project's construction. 1) Face-to-face interviews: No concerns or objections were raised during this monitoring period. Villagers were willing to participate in video-recorded interviews, further demonstrating their openness. 2) Monthly Operation & Maintenance (O&M) Report: Two community-related comments were documented, both of which have been resolved. 3) Grievance book: No feedback was recorded via this channel during the monitoring period. The absence of unresolved issues across all feedback mechanisms indicates positive community relations and effective grievance resolution.

2.1.4 Grievance Redress Procedure

Grievances received	Resolution and outcome
There were 2 grievances received and two of them were resolved.	The grievance procedure is well-documented and easily accessible to stakeholders through the on-site postings. There was a dispute about monks were not ok to cut the trees near the line in front of Pagoda, which was received in April 2023. The issues and solutions were in the Monthly Operation & Maintenance Report, community issues are recorded every month. In May 2023, the PP cut down 3

	large trees and some small shrubs and also trimmed branches near the power line and paid \$750 to the monks to mitigate the dispute. The PP believes that since only 3 large trees have commercial value and the shrub trees are very small and not have commercial value, the Monthly Operation & Maintenance Report simply recorded the O&M team paid \$250 per tree to mitigate the dispute, which is consistent with monks' statement that the project owner paid a total of \$750 for cutting trees. In summary, no matter how many trees and shrubs are cut down, this dispute has been resolved in this monitoring period. In December 2024, PP received a request from community for repairing the village access road shared with the main solar plant access, which has been informed of management team for further action in this monitoring period. There is no negative comment received for the project in other months in the reporting period.
--	--

2.1.5 Public Comments

Summary of comments received	Actions taken
No comments were received during the stakeholder consultation period, nor were any comments submitted outside of the public comment period for the project.	N/A

2.2 Risks to Stakeholders and the Environment

2.2.1 Management Experience

The project owner is Green Sustainable Ventures Co., Ltd. The shareholders of the project owner are Salah Essa and Astoria Solar Farm SDN.BHD which is wholly owned by Pestech. Based on the Land Lease Agreement, Salah Essa who owns the project land has leased the project land to the project owner for 20 years to operate this solar project, indicating that the project owner has the land use right to the project land.

The project proponent Climate Bridge (Shanghai) Ltd. has developed over 100 Clean Development Mechanism (CDM) projects and over 100 Verified Standard (VCS) projects and Gold

Standard (GS) projects. Climate Bridge (Shanghai) Ltd. has extensive experience in carbon emission reduction projects' development.

2.2.2 Risk assessment

	Risk identified	Mitigation or preventative measure(s) taken
Natural and human-induced risks to stakeholders' wellbeing	No risk identified	The project aims to utilize the solar energy at the project site and generated and supply electricity to the EDC grid. Compared with the baseline, no risk from either natural or human-induced risks is identified.
Risks to stakeholder participation	No risk identified	There are no risks identified including project design and consultation. In the registered VCS joint PD&MR, the mechanism for local stakeholders are 2 approaches: (1) Community issues are regularly recorded in the Monthly Operation & Maintenance Report. (2) Local villagers are regularly interviewed by face-to-face.
Working conditions	No risk identified	The project provides safety training, portable extinguisher training, solar string testing training, technical training and adequate labor protection supplies for employees.
Safety of women and girls	No risk identified	There were no risks identified related to the safety of women and girls in the local community due to the project activities. The project pays attention to the occupational health of female employees, providing regular health checkups and mental health support. The pay structure is reviewed regularly to ensure fair pay for both male and female employees.
Safety of minority and marginalized groups, including children	No risk identified	There were no risks identified related to the safety of minority and marginalized groups, including children.
Pollutants (air, noise, discharges to water, generation of waste, and release of	No risk identified	Measures have been identified in the EIA of the project to mitigate environmental pollution caused by construction and operation, which were implemented per

hazardous materials and chemical pesticides and fertilizers)		environment pollution-related laws and regulations and supervised by the local government. During the operation period, the noise-generating equipment is enclosed, and periodic maintenance of the equipment were conducted and noise level is complied with International Finance Corporation Environmental, Health, and Safety Guidelines. The solar panels cleaning wastewater mainly includes dust, which does not require chemical treatment. The disposal of the sewage system was outsourced to an external team, with no discharge into external drains and no reuse of the wastewater ensured. For the solid waste, the provincial waste collection authority removes solid waste based on the observed accumulation levels, with collection initiated only when plant management determines the quantity warrants removal. The environmental impact is minor, and appropriate measures have been taken by the PP. Therefore, there are no pollutants risks identified during this monitoring period.
--	--	--

2.3 Respect for Human Rights and Equity

2.3.1 Labor and Work

	Risks identified ⁹	Mitigation or preventative measure(s) taken
Discrimination	No risk identified	The project has well established HR policies that strictly prohibit all forms of discrimination. These policies ensure no discrimination based on race, gender, disability, or any other characteristic

⁹ The identified risks and commensurate mitigation or preventative measure(s) for forced labor, child labor, and human trafficking, must be inclusive of staff and contracted workers employed by third parties.

		occurs during the design or implementation phases. Workers, including women, are provided with equal work and are fully protected under these regulations. Employees are provided with safe and effective reporting channels and procedures for handling reported information quickly.
Sexual harassment	No risk identified	The project has well-established HR policies that strictly prohibit all forms of harassment. These policies ensure no sexual harassment based on gender. Workers, including women, are provided with equal pay for equal work and are fully protected under these regulations. Employees are provided with safe and effective reporting channels and procedures for handling reported information quickly.
Gender equity in labor and work	No risk identified	The project employed women and all workers were provided equal pay for equal work. And regular review of pay structures was carried out to ensure equity in pay for men and women employees.
Forced labor	No risk identified	When overtime work is required, employees are reasonably compensated and there is no forced labor.
Child labor	No risk identified	HR policy of the project owner strictly follows the laws and regulations in Cambodia, child labor is prohibited. Furthermore, the operation of project requires professional knowledge and skills that can't be found in children. Therefore, there is no possibility of child labor used by the project.
Human trafficking	No risk identified	All employees including women are employed voluntarily.

2.3.2 Human Rights

The project is committed to uploading the rights of IPs, LCs, and customary rights holders by engaging in ongoing, informed consultations, obtaining their free, prior, and informed consent for

any activities, and ensuring that their cultural heritage and traditional knowledge are respected and preserved by international human rights law, the United Nations Declaration on the Rights of Indigenous Peoples, and ILO Convention 169.

Risks identified	Mitigation or preventative measure(s) taken
No risk identified	The project is located in Monourom village and vested by Green Sustainable Ventures (Cambodia) Co., Ltd. The project has obtained approval from the local government in accordance with laws and regulations prior to project construction. In addition, the project owner has conducted regular local stakeholder consultations and all stakeholders have agreed and supported the construction and operation of the project. The project proponent ensures that all employees' labor contracts are fair and equitable. Specifying working conditions, wages and working hours. Any form of deposit, withholding of identity documents or restriction of employees are preserved by international human rights law. Therefore, the project complies with the relevant VCS regulations for FPIC. There are no ongoing or unsolved conflicts for this project.

2.3.3 Indigenous Peoples and Cultural Heritage

Risks identified	Mitigation(s) or preventative measure taken
No risk identified	The purpose of the project is to utilize the solar energy at the project site to generate and supply electricity to the Eletricite Du Cambodge Grid (EDC grid), which does not involve IPs, LCs, and customary rights holders. The project is located in Monourom village, Bavet City, Svay Rieng Province, Cambodia and the project is not on the UNESCO's World Heritage List according to World

	Heritage Convention Unesco Website ¹⁰ , therefore, there is no indigenous peoples and cultural heritage risk during this monitoring period.
--	--

2.3.4 Property Rights

Risks identified	Mitigation or preventative measure(s) taken
No risk identified	The project prioritizes protecting stakeholders' property rights by engaging in regular consultants, complying with legal standards, documenting rights, offering accessible conflict resolution, and ensuring fair benefit sharing and transport monitoring.

2.3.5 Benefit Sharing

As the project does not impact property rights described in Section 2.3.4 above, the following information is irrelative.

Summary of the benefit sharing plan	N/A
Benefit sharing during the monitoring period	N/A

2.4 Ecosystem Health

	Risk identified	Mitigation or preventative measure(s) taken during the monitoring period
Impacts on biodiversity and ecosystems	No risk identified	According to EIA of the project, the project has no further impact on biodiversity and ecosystems. Prior to the construction, the land is a sugar plantation. For the site preparation, the project owner planted grass under the solar photovoltaic panels, which can prevent water loss and soil erosion during the operation period.

¹⁰ <https://whc.unesco.org/en/statesparties/kh>

Soil degradation and soil erosion	No risk identified	According to the EIA of the project, the project has no further impact on the soil.
Water consumption and stress	No risk identified	As per EIA of the project, the cleaning of solar panels requires to consume water to remove dust and other debris. The water for cleaning sources from groundwater sourced from bore hole with plant premises. The water consumption and stress for cleaning solar panels are within the normal range each time, which means that the operating pressure is 300-400 pounds per square inch (psi) and the water consumption is 3-5 litres per panel. Therefore, no risk was identified to water consumption and stress during this monitoring period.

2.4.1 Rare, Threatened, and Endangered species

Species or habitat	There are no rare, threatened, or endangered species in the project.
Areas needed for habitat connectivity	According to the EIA of the project, the project has no impact on habitats and areas needed for habitat connectivity for rare, threatened, or endangered species.

2.4.2 Introduction of species

According to the EIA of the project, the project does not involve the introduction of any plant or animal species. As such, the table for categorizing species as native or non-native and assessing the adverse effects and mitigation measures does not apply to this project. The project activities focus on utilizing solar energy to generate and supply electricity to the EDC grid; no species introduction is part of these activities.

Species introduced	Classification	Justification for use	Adverse effects and mitigation
N/A	N/A	N/A	N/A

2.4.3 Ecosystem conversion

This is not applicable as the project is not an ARR, ALM, WRC or ACoGS project.

3 IMPLEMENTATION STATUS

3.1 Implementation Status of the Project Activity

The project started construction on 13-Apr-2021 and was commissioned on 27-Jan-2022. The total installed capacity is 26MWp which consists of 55,026 pieces of the solar PV cell modules with unit capacity of 455W. The conversion ratio of inverters from direct current (DC) to alternating current (AC) is 1.3, i.e., DC/AC=1.3. Therefore, the total installed capacity is 20MWac on the side of the alternating current. The project lifetime of solar PV cell modules is 25 years. The main technical parameters of the key equipment of the project are demonstrated in the table below.

Table 3-1 The key technical parameters of solar cell modules and inverters

	Item	Unit	Technical parameters
Solar cell module	Type	-	Q.PEAK DUO XL-G9.3 455W
	Number	-	55,026
	Rated Power	W	455
	Rated Voltage	V	44.61
	Rated Current	A	10.20
	Open Circuit Voltage	V	53.22
	Short Circuit Current	A	10.67
	Efficiency	%	≥20.4
	Lifetime	year	25
	Manufacturer	-	Hanwha Q CELLS (Qidong) Co.,Ltd.
Inverter	Type	-	SG250HX
	Number	-	89
	Rated Output Power	kW	225
	Rated Output Voltage	V	800
	Rated Output Frequency	Hz	50/60
	Manufacturer	-	Sungrow Power Supply Co.,Ltd.

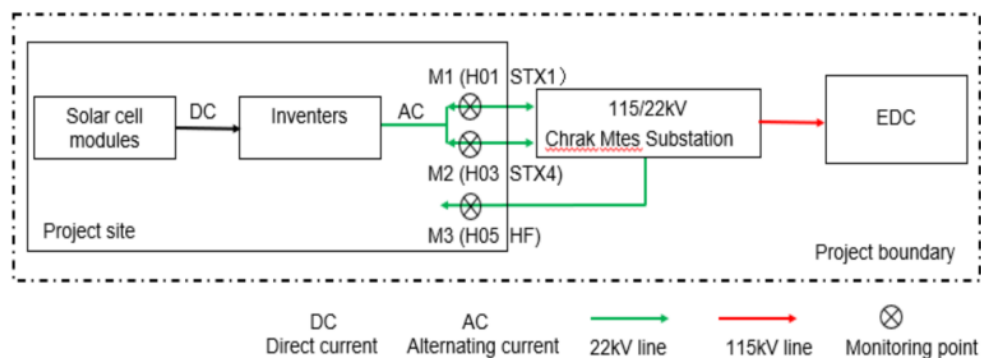


Figure 3-2. The process flow chart of the project

The electricity generation supplied by the project is sent to the 115/22kV Chrak Mtes Substation by the 22kV transmission line and then delivered to the EDC grid through 115kV transmission line. The process chart of the project please refers to Figure 3-2. The cut-off time of electricity meters is at 24:00 last day of every month. The accuracy of all electricity meters is not lower than 0.5S.

During the second monitoring period, the quantity of electricity supplied by the project plant to the grid is 73,224.284 MWh. The quantity of electricity delivered to the project plant from the grid is 344.607 MWh. The quantity of net electricity generation supplied by the project plant to the grid is 72,879.677, and the achieved reduction is 42,837 tCO_{2e}.

The project has operated without any accidental or emergency events that might impact the applicability of the methodology, the GHG emission reductions or removals and monitoring.

3.2 Deviations

3.2.1 Methodology Deviations

There is no methodology deviation for the project.

3.2.2 Project Description Deviations

There is no project description deviation for the project.

3.3 Grouped Projects

The project is not a grouped project.

3.4 Baseline Reassessment

Did the project undergo baseline reassessment during the monitoring period?

☐ Yes ☒ No

4 DATA AND PARAMETERS

4.1 Data and Parameters Available at Validation

Data / Parameter	EF_{grid,CM,y}
Data unit	tCO ₂ /MWh
Description	Combined margin CO ₂ emission factor for grid connected power generation in year y calculated using TOOL07
Source of data	The IFI Dataset of Default Grid Factors version 3.2. Please refer to the registered VCS joint PD&MR section 3.6 for details.
Value applied	0.5878
Justification of choice of data or description of measurement methods and procedures applied	The IFI Dataset of Default Grid Factors version 3.2. Please refer to section 3.6 of the registered VCS joint PD&MR for details.
Purpose of data	Calculation of baseline emissions
Comments	Fixed in the first crediting period

4.2 Data and Parameters Monitored

Data / Parameter	EG_{facility,y}
Data unit	MWh/yr
Description	Quantity of net electricity generation supplied by the project plant/unit to the grid in year y
Source of data	Electricity meters
Description of measurement methods and procedures to be applied	Monitored by electricity meters and monthly recorded by the project operators The parameters of EG_{facility,y} is calculated by the difference between (a) the quantity of electricity supplied by the project plant to the grid and (b) the quantity of electricity delivered to the project plant from the grid. (a) the quantity of electricity supplied by the project plant to the grid is measured continuously by bi-directional electricity meters M1 and M2. (a) is calculated by the sum of these two electricity meters readings. (b) the quantity of electricity delivered to the project plant from the grid is measured continuously by electricity meters M1, M2 and M3. (b) is calculated by the sum of these three electricity meters readings.

Frequency of monitoring/recording	Monitored by electricity meters and monthly recorded by the project operators																										
Value monitored	<table> <tr> <th colspan="3">Monitoring Period</th><th>Monitoring value</th></tr> <tr> <td>01-Jan-2023</td><td>to</td><td>31-Dec-2023</td><td>37,281.248</td></tr> <tr> <td>01-Jan-2024</td><td>to</td><td>31-Dec-2024</td><td>35,598.429</td></tr> <tr> <td colspan="3">Total</td><td>72,879.677</td></tr> </table>			Monitoring Period			Monitoring value	01-Jan-2023	to	31-Dec-2023	37,281.248	01-Jan-2024	to	31-Dec-2024	35,598.429	Total			72,879.677								
Monitoring Period			Monitoring value																								
01-Jan-2023	to	31-Dec-2023	37,281.248																								
01-Jan-2024	to	31-Dec-2024	35,598.429																								
Total			72,879.677																								
Monitoring equipment	Electricity meters will an accuracy no lower than 0.5S. <table> <tr> <th>Monitoring equipment</th><th>M1</th><th>M2</th><th>M3</th></tr> <tr> <td>Location</td><td>H01 STX1 (Incoming F1)</td><td>H03 STX4 (Incoming F2)</td><td>H05 HF</td></tr> <tr> <td>Type</td><td>Mk6E</td><td>Mk6E</td><td>Mk6E</td></tr> <tr> <td>Serial No</td><td>920809277</td><td>920809279</td><td>250691873</td></tr> <tr> <td>Accuracy</td><td>0.2S</td><td>0.2S</td><td>0.5S</td></tr> <tr> <td>Calibration Date</td><td>22-Jan-2024</td><td>23-Jan-2024</td><td>23-Jan-2024</td></tr> </table>			Monitoring equipment	M1	M2	M3	Location	H01 STX1 (Incoming F1)	H03 STX4 (Incoming F2)	H05 HF	Type	Mk6E	Mk6E	Mk6E	Serial No	920809277	920809279	250691873	Accuracy	0.2S	0.2S	0.5S	Calibration Date	22-Jan-2024	23-Jan-2024	23-Jan-2024
Monitoring equipment	M1	M2	M3																								
Location	H01 STX1 (Incoming F1)	H03 STX4 (Incoming F2)	H05 HF																								
Type	Mk6E	Mk6E	Mk6E																								
Serial No	920809277	920809279	250691873																								
Accuracy	0.2S	0.2S	0.5S																								
Calibration Date	22-Jan-2024	23-Jan-2024	23-Jan-2024																								
QA/QC procedures to be applied	In the second monitoring period, by cross checking, the monthly meter records of both (a) and (b) were in consistent with the data in the sale and purchase receipts. The electricity meters were periodically checked and maintained. Calibration was carried out in accordance with the PPA. As per the Chapter 7.5 of Meter Accuracy in the PPA, the total metering system accuracy shall be 0.2% or better. The total metering system accuracy should be measured above 0.2%, and the project proponent will immediately report this to the EDC grid for their inspection and arrange for meters to be tested for accuracy and re-calibrated. All electronic data and paper documents will be archived for two years following the end of the crediting year.																										
Purpose of the data	Calculation of baseline emissions																										
Calculation method	-																										
Comments	-																										

4.3 Monitoring Plan

The monitoring plan assures that real, measurable, long-term GHG emission reductions can be monitored, recorded and reported. It is a crucial procedure to identify the final emission reduction of the project. The monitoring plan will be implemented by the project proponent during the project operation. The details of the monitoring plan are specified as the following:

Management Structure

The project proponent organizes a specific monitoring team to be responsible for data collection, supervision and witness the whole process of data measuring and recording. Monitoring manager has been appointed to take full responsibility for the overall monitoring of the project. The monitoring and recording of the electricity meters are to be carried out by designated monitoring staff. In addition, the project developer appoints internal verifiers who is responsible for internal checks of the measurement, collection of relevant sales and purchases receipts, and the calculation of the emission reductions.

Data and parameters to be monitored

The parameter to be monitored is Quantity of net electricity generation supplied by the project plant/unit to the grid, which is calculated as difference between (a) the quantity of electricity supplied by the project plant to the grid and (b) the quantity of electricity delivered to the project plant from the grid.

As shown in Figure 3-2 of section 3.1 in this report, the electricity generation supplied by the project is sent to the 115/22kV Chrak Mtes Substation by the 22kV transmission line, and then delivered to the EDC grid through 115kV transmission line. (a) is to be continuously measured by electricity meters M1 and M2 installed at the H01 STX1 and H03 STX4 of 22kV lines in the low voltage side of the project. (b) is to be continuously measured by electricity meters M1, M2 and M3 installed at the H01 STX1, H03 STX04 and H05 HF of 22kV lines in the low voltage side of the project.

Meters reading will be at least monthly recorded. The accuracy of all electricity meters is not lower than 0.5s.

Data collection

Monitoring staffs of the proposed project are responsible for data collection. Designated teams will read and collect the monitored data regularly and record in the meter reading records or operation log. The meter readings are also available to the power grid through remote reading system. Monthly settlement for electricity supplied to the grid will be based on the meter readings. Meter reading records will serve as the main data source for emission reductions calculation, after crosschecking with the sales and purchase receipts. All data files, relevant sales receipts will be collected by designated monitoring staff, who will prepare backup in time and archive all documents properly.

Quality assurance

As per Schedule 6 of metering system, standard and testing in PPA, prior to installation of meters, the project will deliver such meters to the EDC grid's qualified test laboratory for accuracy calibration tests to be carried out to the satisfaction of EDC grid. After satisfactory accuracy calibration tests, such meters will be sealed and delivered to the project site for installation. After the installation of such meters, site tests will be undertaken to confirm the accuracy of the meters. All electricity meters of the project have been approved by the EDC grid and M1, M2 and M3 have been installed at the 22kV lines in the low voltage side of the project, the accuracy of electricity meters is not lower than 0.5s.

The calibration frequency should comply with PPA. As in the registered VCS joint PD&MR in Chapter 7.5 of Meter Accuracy in the PPA, the total metering system accuracy shall be 0.2% or better. Should total metering system accuracy be measured above 0.2%, the project proponent will immediately report this to the EDC grid for their inspection and arrange for meters to be tested for accuracy and re-calibrated. All electricity meters have been calibrated prior to the project start date. The total metering system accuracy is normal during this monitoring period and no electricity meters need to be recalibrated.

Applicable International Electrotechnical Commission (IEC) standards such IEC 62052 General requirements, tests and test conditions and IEC 62053 Electricity metering equipment – Particular requirements are applied for the metering system.

Error check routines will be established on site and at the point of data storage to detect data measuring/transmission failures as well as malfunctions. In the case of malfunction of the meters, the meter supplier will provide technical support to engage the problem promptly and emission reductions during the corresponding period will be calculated conservatively.

Data file management

All monitoring data will be electronically filed by the end of month and the electronic data files will be archived in both disk copy and printed hard copy. Other documents in paper e.g., operation logbooks, will be preserved as well. All data collected as part of monitoring will be archived electronically and be kept at least for 2 years after the end of the crediting period.

5 QUANTIFICATION OF GHG EMISSION REDUCTIONS AND REMOVALS

5.1 Baseline Emissions

According to the methodology ACM0002 (Version 21.0), baseline emissions are determined based on the registered VCS joint PD&MR Section 5.1. The BE_y is ex-post determined as the following equations:

$$BE_y = EG_{PJ,y} \times EF_{grid,CM,y}$$

Where:

BE_y	=	Baseline emission in year y (tCO ₂ e)
$EG_{PJ,y}$	=	Quantity of net electricity generation that is produced and fed into the grid as a result of the implementation of the CDM project activity in year y (MWh/yr)
$EF_{grid,CM,y}$	=	Combined margin CO ₂ emission factor for grid-connected power generation in year y calculated using TOOL07 (tCO ₂ e/MWh)

The project is a Greenfield solar power plant, then:

$$EG_{PJ,y} = EG_{facility,y}$$

Where:

$EG_{facility,y}$ = Quantity of net electricity generation supplied by the project plant/unit to the grid in year y (MWh/yr).

$EG_{facility,y}$ is calculated by the difference between (a) the quantity of electricity supplied by the project plant and (b) the quantity of electricity delivered to the project plant from the grid. (a) is calculated by the sum of these two electricity meters readings, (b) is calculated by the sum of these three electricity meters readings. The monthly data of (a), (b) and $EG_{facility,y}$ is listed as below.

Based on Section 5.1 of the registered VCS joint PD&MR, the $EF_{grid,CM,y}$ of the project is 0.5878 tCO₂e/MWh, therefore BE_y is ex post calculated value during this monitoring period as follows.

Period	$EG_{facility,y}$	$EF_{grid,CM,y}$	BE_y
	MWh	tCO ₂ /MWh	tCO ₂ e
	A	B	C=A*B
01-Jan-2023 to 31-Dec-2023	37,281.248	0.5878	21,913
01-Jan-2024 to 31-Dec-2024	35,598.429	0.5878	20,924
Total	72,879.677	0.5878	42,837

Therefore, the baseline emission is 42,837 tCO₂e during the second monitoring period

Period	The quantity of electricity supplied by the project plant to the grid (MWh)				The quantity of electricity delivered to the project plant from the grid (MWh)					EG _{facility,y} (MWh)
	Meter reading records		Sale receipts	The quantity of electricity supplied by the project plant to the grid	Meter reading records			Purchase receipts	The quantity of electricity delivered to the project plant from the grid	
	M1 (H01_STX1-Incoming F1)	M2 (H03_STX4-Incoming F2)			M1 (H01_STX1-Incoming F1)	M2 (H03_STX4-Incoming F2)	M3 (H05 HF)			
	A	B			C	D=Min ((A+B), C)	E	F	G	
01-Jan-2023 to 31-Jan-2023	1,437.755	1,586.263	3,024.018	3,024.018	1.629	1.719	2.812	6.160	6.160	3,017.858
01-Feb-2023 to 28-Feb-2023	1,450.926	1,596.356	3,047.282	3,047.282	1.119	1.188	2.586	4.893	4.893	3,042.389
01-Mar-2023 to 31-Mar-2023	1,682.170	1,845.339	3,527.509	3,527.509	1.219	1.217	2.896	5.332	5.332	3,522.177
01-Apr-2023 to 30-Apr-2023	1,455.129	1,602.096	3,057.225	3,057.225	0.930	0.913	2.740	4.583	4.583	3,052.642
01-May-2023 to 31-May-2023	1,464.472	1,610.068	3,074.540	3,074.540	0.757	0.751	3.846	5.354	5.354	3,069.186
01-Jun-2023 to 30-Jun-2023	1,474.505	1,621.785	3,096.290	3,096.290	0.630	0.614	5.871	7.115	7.115	3,089.175
01- Jul-2023 to 31-Jul-2023	1,410.537	1,553.105	2,963.642	2,963.642	0.719	0.707	6.108	7.534	7.534	2,956.108
01-Aug-2023 to 31-Aug-2023	1,613.312	1,766.505	3,379.817	3,379.817	0.883	0.875	6.017	7.775	7.775	3,372.042
01-Sep-2023 to 30-Sep-2023	1,401.851	1,542.193	2,944.044	2,944.044	1.373	1.359	5.817	8.549	8.549	2,935.495
01-Oct-2023 to 31-Oct-2023	1,457.897	1,593.804	3,051.701	3,051.701	1.453	1.438	5.984	8.875	8.875	3,042.826
01-Nov-2023 to 30-Nov-2023	1,477.233	1,623.395	3,100.628	3,100.628	1.348	1.311	5.966	8.625	8.625	3,092.003

01-Dec-2023 to 31-Dec-2023	1,519.884	1,578.514	3,098.398	3,098.398	1.523	1.402	6.126	9.051	9.051	3,089.347
01-Jan-2024 to 31-Jan-2024	3,059.685	0.001	3,059.686	3,059.686	15.265	0.001	6.177	21.443	21.443	3,038.243
01-Feb-2024 to 29-Feb-2024	2,889.462	0.000	2,889.462	2,889.462	15.284	0.000	5.831	21.115	21.115	2,868.347
01-Mar-2024 to 31-Mar-2024	3,102.805	0.000	3,102.805	3,102.805	15.847	0.000	6.124	21.971	21.971	3,080.834
01-Apr-2024 to 30-Apr-2024	2,761.905	0.000	2,761.905	2,761.905	15.362	0.000	5.889	21.251	21.251	2,740.654
01-May-2024 to 31-May-2024	2,893.704	0.000	2,893.704	2,893.704	15.672	0.000	6.001	21.673	21.673	2,872.031
01-Jun-2024 to 30-Jun-2024	3,102.692	0.000	3,012.692	3,012.692	15.024	0.000	5.836	20.860	20.860	2,991.832
01-Jul-2024 to 31-Jul-2024	1,804.582	1,089.664	2,894.246	2,894.246	9.532	5.843	6.074	21.449	21.449	2,872.797
01-Aug-2024 to 31-Aug-2024	1,614.335	1,786.128	3,400.463	3,400.463	7.915	7.785	6.215	21.915	21.915	3,378.548
01-Sep-2024 to 30-Sep-2024	1,355.118	1,490.991	2,846.109	2,846.109	7.848	7.721	6.036	21.605	21.605	2,824.504
01-Oct-2024 to 31-Oct-2024	1,533.936	1,688.517	3,222.453	3,222.453	8.268	8.166	6.192	22.626	22.626	3,199.827
01-Nov-2024 to 30-Nov-2024	1,481.947	1,631.370	3,113.317	3,113.317	7.937	7.910	6.042	21.889	21.889	3,091.428
01-Dec-2024 to 31-Dec-2024	1,266.342	1,396.006	2,662.348	2,662.348	8.332	8.326	6.306	22.964	22.964	2,639.384
Total	44,622.184	28,602.100	73,224.284	73,224.284	155.869	59.246	129.492	344.607	344.607	72,879.677

5.2 Project Emissions

As a solar generation project, according to ACM0002 (Version 21.0), the project emissions $PE_y = 0$.

5.3 Leakage Emissions

According to ACM0002 (Version 21.0), no leakage emissions are considered.

5.4 GHG Emission Reductions and Carbon Dioxide Removals

Emission reductions are calculated as follows:

$$ER_y = BE_y - PE_y - LE_y$$

Based on the above calculation process, the emission reduction is summarized as follows:

Vintage period	Baseline emissions (tCO ₂ e)	Project emissions (tCO ₂ e)	Leakage emissions (tCO ₂ e)	Reduction VCUs (tCO ₂ e)	Removal VCUs (tCO ₂ e)	Total VCUs (tCO ₂ e)
01-Jan-2023 to 31-Dec-2023	21,913	0	0	21,913	/	21,913
01-Jan-2024 to 31-Dec-2024	20,924	0	0	20,924	/	20,924
Total	42,837	0	0	42,837	/	42,837

According to the registered VCS joint PD&MR, the emission reductions in 2023 and 2024 are expected to be 23,027 tCO₂ and 22,912 tCO₂, respectively. The difference between the ex-ante estimated reductions and the achieved reduction during the period is as follows:

Vintage period	Ex-ante estimated reductions/removals	Achieved reductions/removals	Percent difference	Explanation for the difference
01-Jan-2023 to 31-Dec-2023	23,027	21,913	-4.84% ¹¹	The actual emission reduction is 6.75% less than the estimated value in the registered VCS joint PD&MR,
01-Jan-2024 to 31-Dec-2024	22,912	20,924	-8.68% ¹²	

¹¹ 21,913/23,027-1=-4.84%

¹² 20,924/22,912-1=-8.68%

Total	45,939	42,837	-6.75% ¹³	which is due to normal fluctuation of solar energy and is deemed reasonable.
-------	--------	--------	----------------------	--

¹³ 42,837/45,939-1=-6.75%

APPENDIX 1: COMMERCIALLY SENSITIVE INFORMATION

The project does not include commercially sensitive information in the project description to be excluded in the public version.

Section	Information	Justification
N/A	N/A	N/A

APPENDIX 2: SUPPORTING EVIDENCE

Evidence for SDG 7 and 13: From the project operation date onwards, the net electricity supplied to the grid and the emission reduction in every monitoring period have been listed in the table below. Please refer to the following links for details.

<https://registry.verra.org/app/projectDetail/VCS/4036>

Period		The net electricity delivered to EDU	Emission Reduction
From	To	MWh	tCO ₂ e
27-Jan-2022	31-Dec-2022	34,694.918	20,393
01-Jan-2023	31-Dec-2023	37,281.248	21,913
01-Jan-2024	31-Dec-2024	35,598.429	20,924

Evidence for SDG 8: The original staff list with more detailed personal information has been submitted as a separate document to VVB due to confidentiality requirement of the project proponent. The simplified staff list in 2023 and 2024 is shown as below.

No.	Emp No	Name	Gender	Year	Working Information			
					Date Join	Position	Education	
							Degree	Major

1	PCL036	CHHEUN PUTHY	M	2023 2024	15-Aug-17	SUBSTATION OPERATOR	Bachelor Degree of Technology	Electrical Engineering
2	PCL037	CHHOM CHHOUDIN	M	2023	15-Aug-17	SOLAR PLANT OPERATOR	Bachelor Degree of Technology	Electrical Engineering
3	PCL038	KHENG BUNTHEL	M	2023 2024	15-Aug-17	SENIOR SUBSTATION OPERATOR	Bachelor Degree of Technology	Electrical Engineering
4	PCL046	THA RASIN	M	2023 2024	05-Sep-17	SUBSTATION OPERATOR	Technical High Diploma	Electrical Engineering
5	PCL048	SEANG CHAMRONG	M	2023	11-Sep-17	SOLAR PLANT OPERATOR	Bachelor Degree of Technology	Electrical Engineering
6	PCL061	YON SOKHACH	M	2023 2024	02-Jan-18	SENIOR SUBSTATION OPERATOR	Bachelor Degree of Technology	Electrical Engineering
7	PCL077	KHUN DARA	M	2023 2024	01-Jul-18	SUBSTATION OPERATOR	Bachelor Degree of Technology	Electrical Engineering
8	PCL091	THON BUNTHIN	M	2024	02-Jan-19	ELECTRICAL SITE ENGINEER	Bachelor Degree of Technology	Electrical Engineering

9	PCL097	MANG SAVIN	M	2024	01-Mar-19	ELECTRICIAN	Secondary School	General
10	PCL137	MAO BUNTHOEUN	M	2024	01-Jun-21	M&E SUPERVISOR	Secondary School	General
11	PCL143	CHAN SOPHANNA	F	2024	01-Aug-21	PROJECT COORDINATOR	Associate's Degree of Engineering	Civil Engineering
12	PCL146	LIM DEVIT	M	2023	01-Apr-22	GENERAL WORKER	Primary School	General
13	PCL160	SAO NIMOL	M	2023 2024	01-Apr-22	GENERAL WORKER	Primary School	General
14	PCL161	YOEM SER	M	2023 2024	01-Apr-22	GENERAL WORKER	Primary School	General
15	PCL162	KONG SOPHEAP	M	2023 2024	01-Apr-22	GENERAL WORKER	Primary School	General
16	PCL163	SAM SAMET	M	2023 2024	01-Apr-22	GENERAL WORKER	Primary School	General
18	PCL164	KEO TI	M	2023 2024	01-Apr-22	GENERAL WORKER	Primary School	General
19	PCL172	NHOEM DUONG	F	2023	01-Sep-22	GENERAL WORKER	Primary School	General

				2024				
20	PCL180	CHON VIT	M	2023 2024	20-Jun-23	SOLAR PLANT OPERATOR	Bachelor Degree of Technology	Electrical Engineering
21	PCL182	KHIEN SOPHEAK	M	2023 2024	01-Aug-23	SOLAR PLANT OPERATOR	Bachelor Degree of Technology	Electrical Engineering
22	PCL185	KHENG BUNRITH	M	2023 2024	16-Sep-23	HEAD OF OPERATOR	Associate's Degree of Engineering	Electrical Engineering
23	PCL187	TUYYORN CHITA	F	2024	01-Mar-24	GENERAL WORKER	Primary School	General
24	PCL188	SUO SREY AN	F	2024	01-Jun-24	GENERAL WORKER	Primary School	General
25	TPJV003	YADDEHIGE SHIRLEY MANOJ KRISHANTHA PERERA	M	2024	01-Apr-10	PROJECT MANAGER	Bachelor Degree of Technology	Electrical Engineering