Per-priority 95th-percentile RLC downlink delay

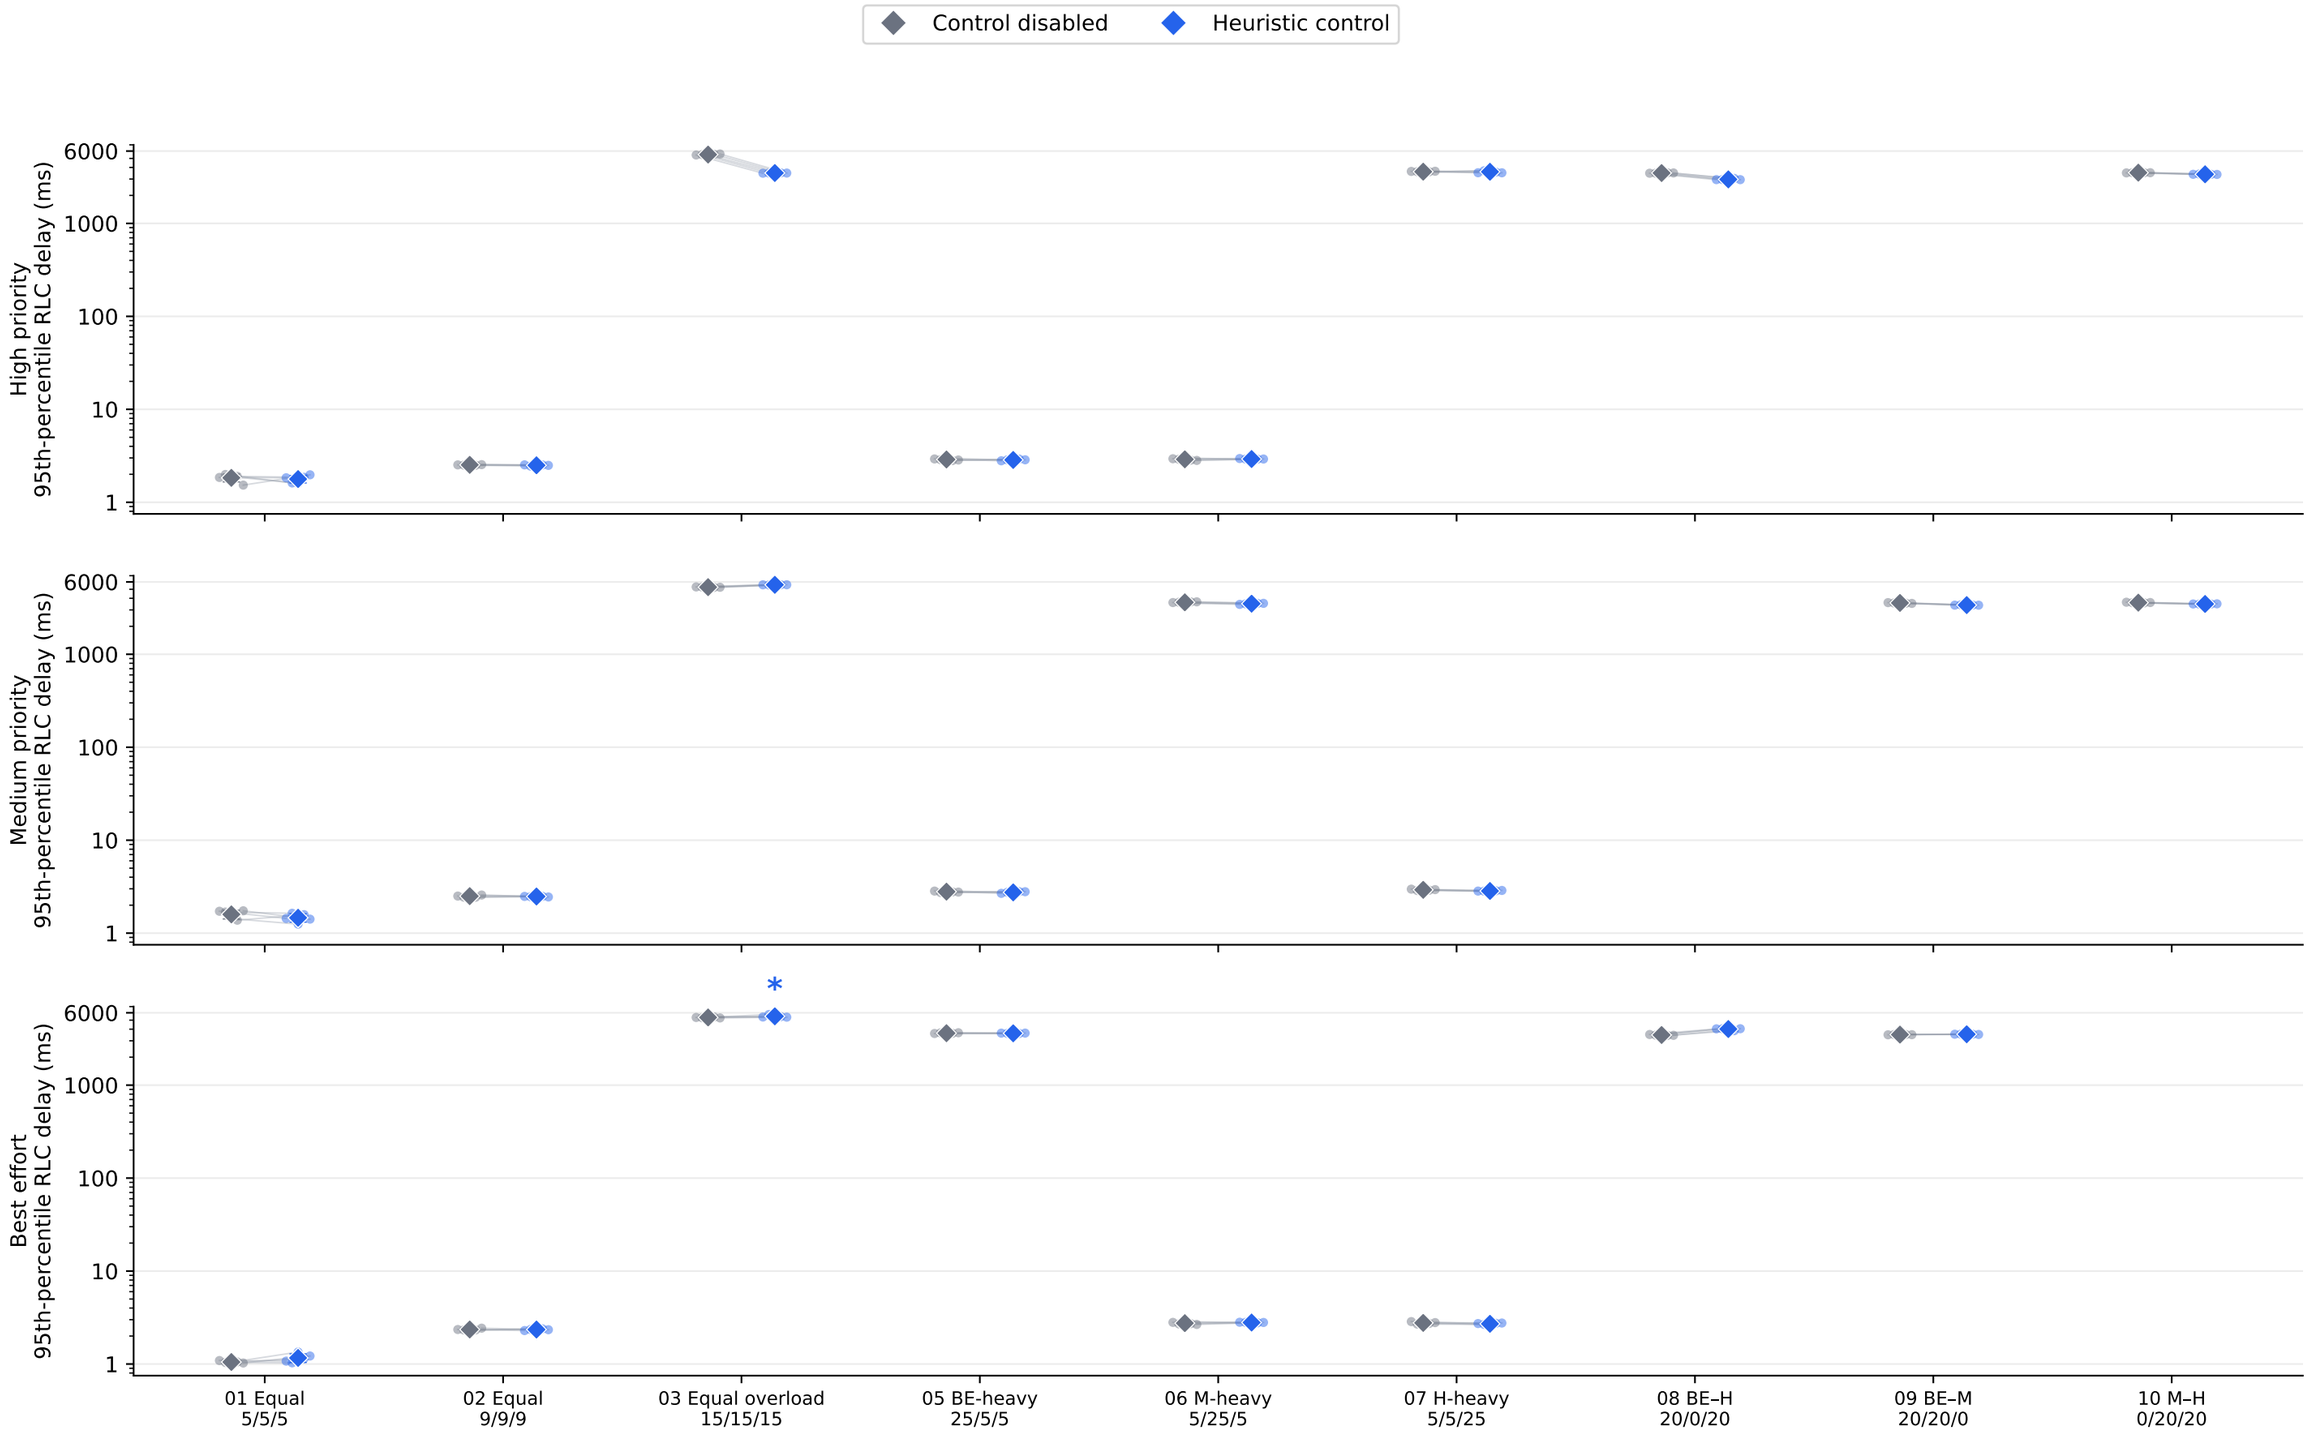

Thin lines join matched baseline/control runs. Diamonds show mean ± 1 SD; small points are the 5 runs. Scenario loads are BE/M/H Mbit/s. Delay axis is logarithmic; raw samples are filtered to 0–6000 ms. * Fewer than 20 valid delay samples in at least one run.