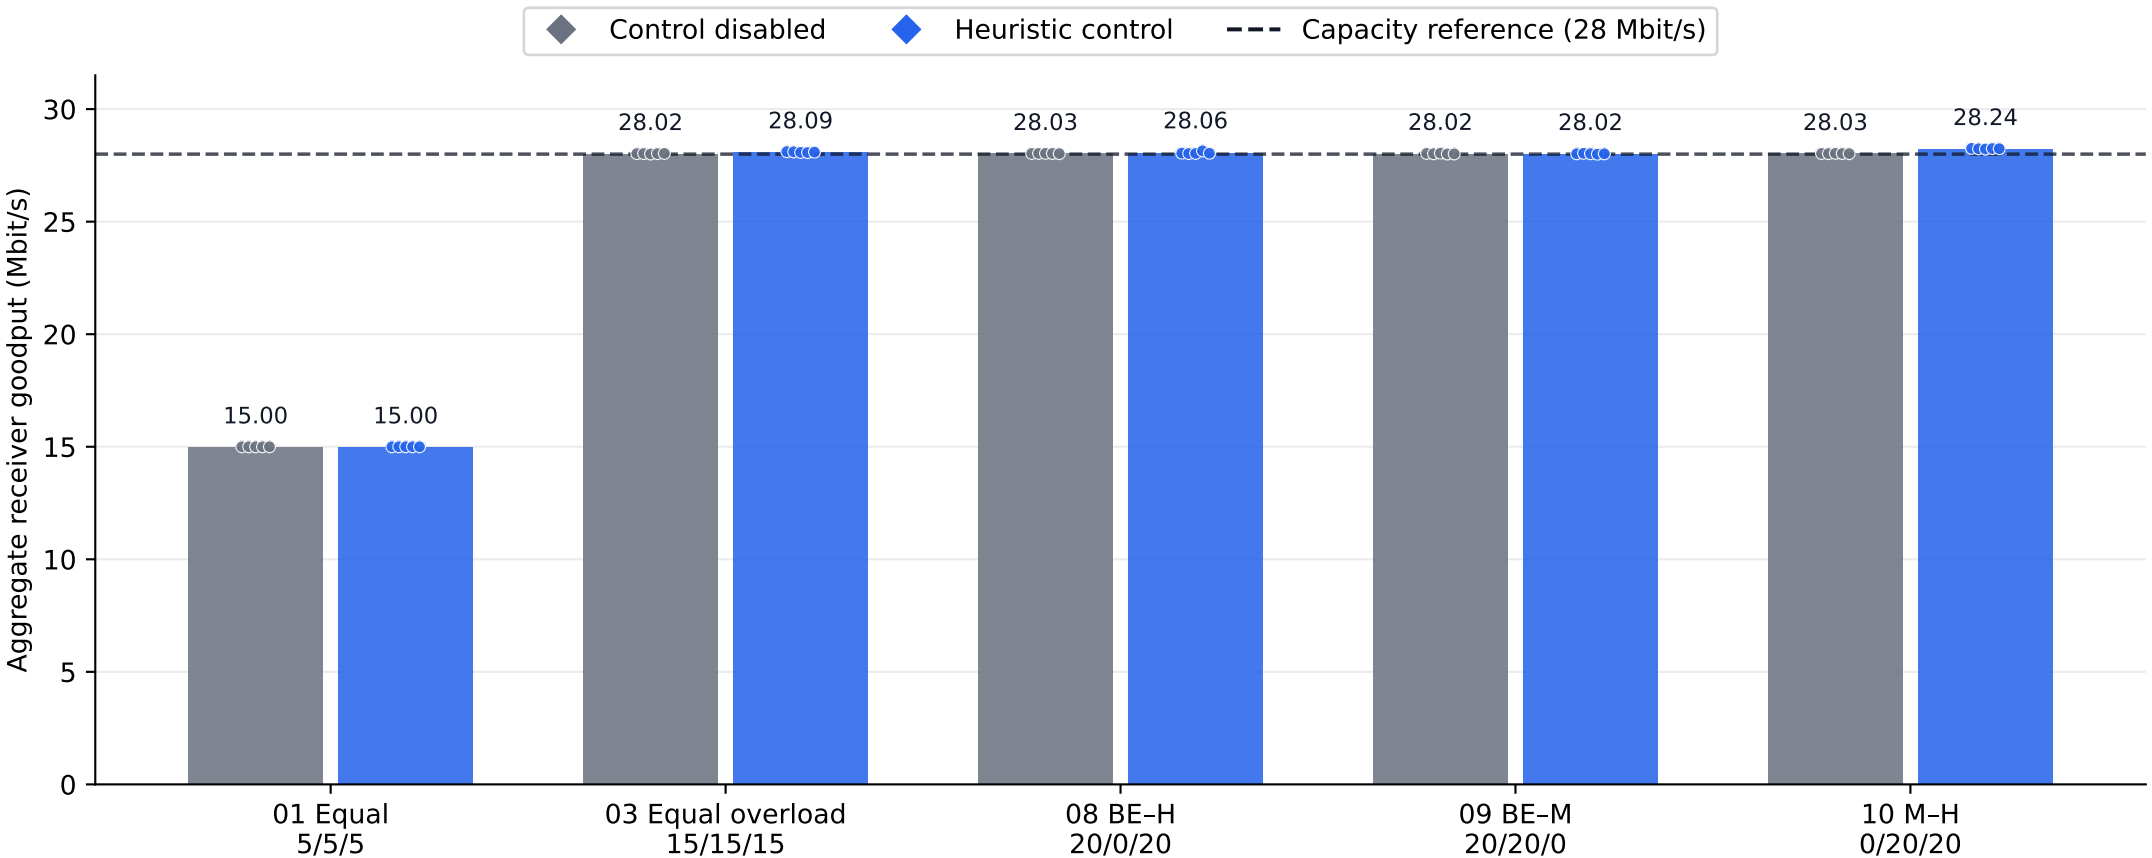
Aggregate downlink goodput in representative scenarios
Control disabled
Heuristic control
Capacity reference (28 Mbit/s)
Aggregate receiver goodput (Mbit/s)
0
5
10
15
20
25
30
15.00
15.00
28.02
28.09
28.03
28.06
28.02
28.02
28.03
28.24
01 Equal
5/5/5
03 Equal overload
15/15/15
08 BE–H
20/0/20
09 BE–M
20/20/0
10 M–H
0/20/20
Bars show mean ± 1 SD; points show all 5 runs. Receiver-side iPerf results.