MODEL:-KG4-82.5WS1



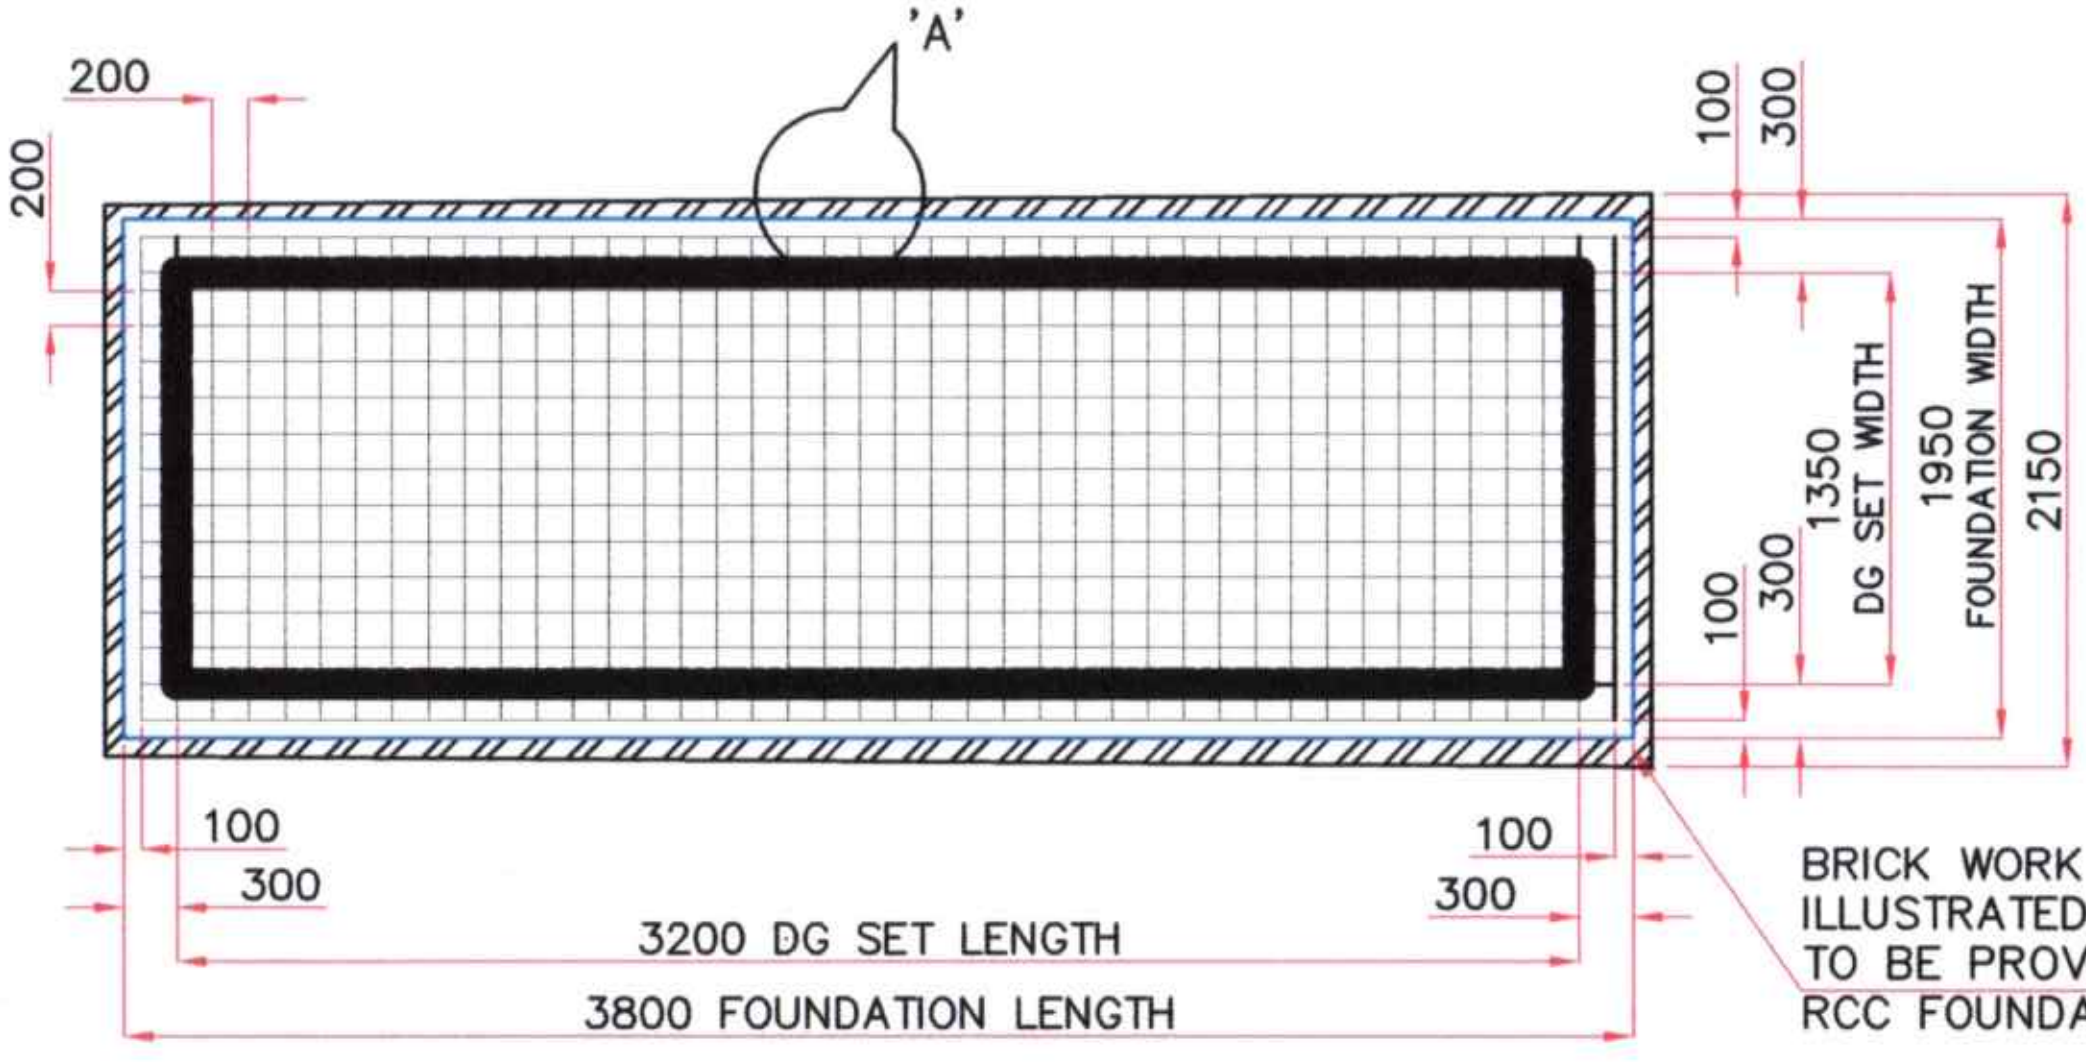

BRICK WORK AS ILLUSTRATED TO BE PROVIDED AROUND RCC FOUNDATION.

IT IS RECOMMENDED TO HAVE FOUNDATION HEIGHT OF 200 mm ABOVE GROUND LEVEL

EPOXY COAT (BETWEEN BASE PLATE & FOUNDATION TOP)

FLOOR OF CEMENT CONCRETE BLOCK MUST BE IN WATER LEVEL.

100mm FINISHED BRICK WORK

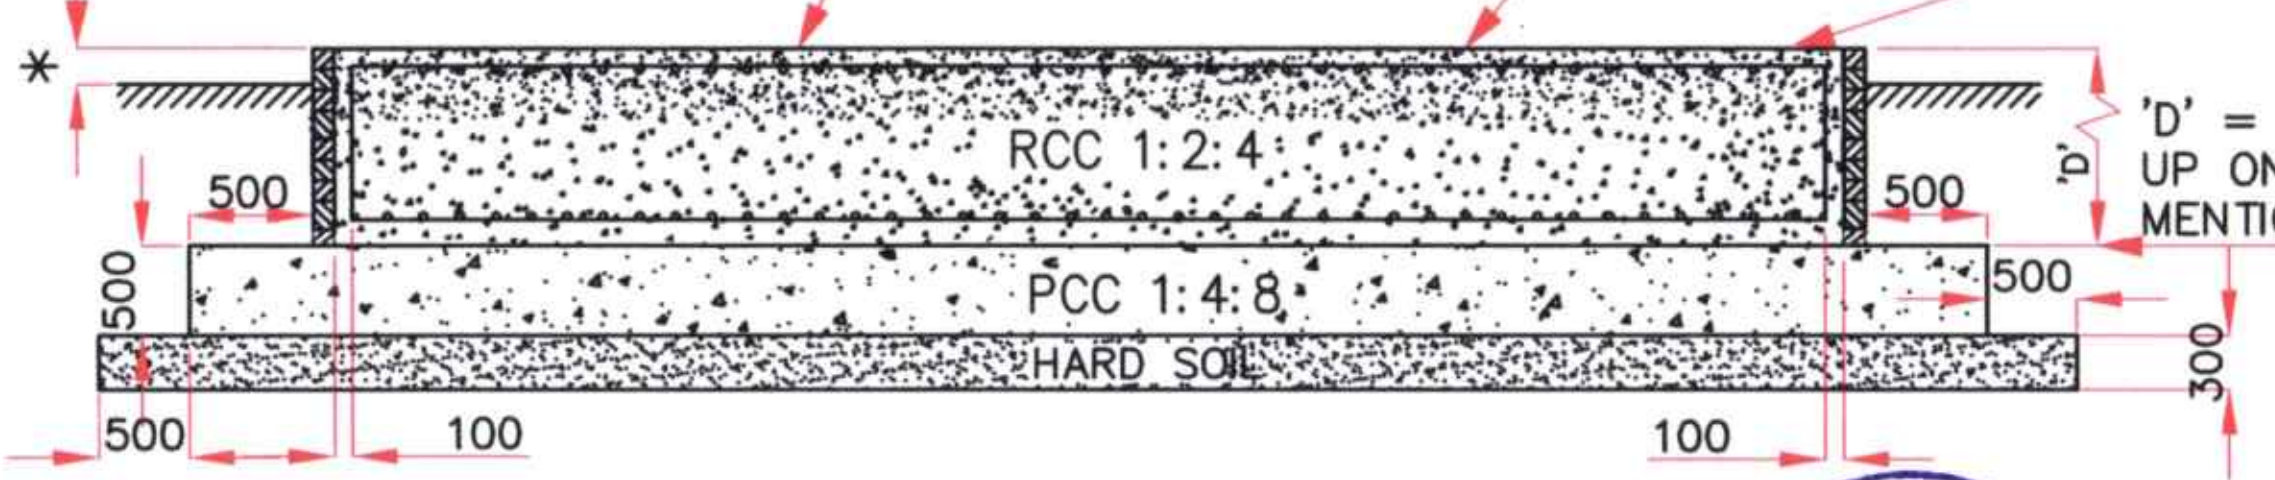

'D' = DEPTH IS DEPEND UP ON SOIL GRADE AS MENTIONED ABOVE.

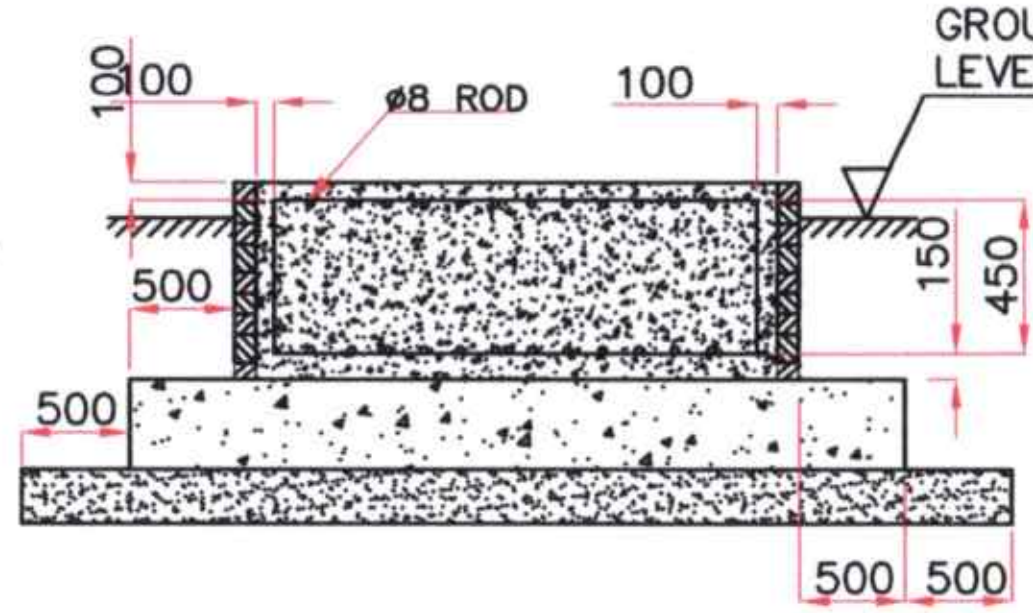

NOTES:-1) FOUNDATION TO BE MADE ON A GOOD PREPARED SURFACE WITH SOIL STRATA BEARING CAPACITY ADEQUATE TO SUPPORT THE WEIGHT OF GENSET & FOUNDATION. REFER CHART FOR SOIL STRENGTH.

NATURE OF LOAD BEARING MATERIAL	SAFE BEARING CAPACITY KG/SQ.M
HARD ROCK GRANITE	2,44,100 - 9,76,400
MEDIUM ROCK SHELL	97,600 - 1,46,400
HARD PAN	78,100 - 97,600
SOFT ROCK	48,800 - 58,600
HARD CLAY	39,000 - 48,800
GRAVEL AND COARSE SAND	39,000 - 48,800
LOOSE,MEDIUM COARSE AND COMPACTED FINE SAND.	29,300 - 39,000
MEDIUM CLAY	19,500 - 39,000
LOOSE FINE SAND	9,750 - 39,500
SOFT CLAY	9,750

2) THE LENGTH & WIDTH OF FOUNDATION SHOULD BE AT LEAST 300 mm MORE ON EACH SIDE THAN GENSET LENGTH & WIDTH RESPECTIVELY.

3) CHECK THE FOUNDATION LEVEL DIAGONALLY AS WELL AS ACROSS THE LENGTH & WIDTH FOR EVEN FLATNESS AND SAME SHOULD BE WITHIN ±50mm IN HORIZONTAL PLANE IN ANY ONE DIRECTION ONLY.

4) ENSURE THAT THE CONCRETE IS COMPLETELY CURED BEFORE POSITIONING THE GENSET.

5) ENSURE THAT THE FOUNDATION TO SUPPORT 1.5 TIMES (DYNAMIC LOAD) OF T TOTAL WET WEIGHT OF THE SINGLE GENERATING SET INSTALLATION & 2 TIMES OF THE TOTAL WET WEIGHT FOR THE MULTIPLE GENERATING SET INSTALLTION.

6) FOR ROOFTOP INSTALLATION,IT IS NECESSARY TO HAVE PLANNING AND STRUCTURAL DESIGN APPROVAL.

7) DO NOT INSTALL GENSET ON LOOSE SAND OR CLAY. AVOID HARD/SHARP PROJECTIONS SUCH AS STONE OR STEEL PARTS ON FOUNDATION SURFACE,WHICH MAY DAMAGE FUEL TANK AT BOTTOM.

8) AVOID UNEVEN FOUNDATION WHICH MAY LEAD TO IMPROPER RESTING OF GENSET ON FOUNDATION,THERE BY LEADING TO LEAKAGE OF SOUND AND VIBRATION ON GENSET.

9) IF GENSET IS TO BE MOUNTED ON FOUNDATION HAVING UNEVEN SURFACE UNDER UNAVOIDABLE CIRCUMASTANCES,USE APPROPRIATE THICKNESS OF RUBBER MATTING ABOVE FOUNDATION FOR POSITIVE SEALING OF GENSET WITH BASE.

10) FOR CABLE TRENCH OPENING OPTION ON FOUNDATION. REFER TO GENSET GENERAL ARRANGEMENT DRAWING.

DO NOT SCALE THE DRAWING

IF IN DOUBT ASK

DEVIATION ON NON TOLERANCED LINEAR MACHINED DIMENSIONS. IS:2102 (PL-1)-1993 MEDIUM CLASS		
FROM UPTO & INCLUDING	DEVIATION mm	
0.5 - 3	±0.1	
3 - 6	±0.1	
6 - 30	±0.2	
30 - 120	±0.3	
120 - 400	±0.5	
400 - 1000	±0.8	
1000-2000	±1.2	
2000-4000	±2	

GEOMETRIC TOLERANCE SYMBOLS IS:8000 (PL-1)-1985.

STRAIGHTNESS	RUN OUT
FLATNESS	ANGULARITY
ROUNDNESS	POSITION
CYLINDRICITY	CONCENTRICITY
PROFILE OF A LINE	SYMMETRY
PROFILE OF A SURFACE	M.M.C.
PARALLELISM	TRUE POSITION
SQUARENESS	DATUM

PRINTS OF PREVIOUS REVISION NO SHOULD BE SCRAPPED

Rev. No.	REVISION	MODIFIED BY	APPROVED BY	DATE

CONTROL COPY 1/3/24

UNLESS OTHERWISE SPECIFIED
- ALL DIMENSIONS ARE IN mm.
- UNMENTIONED TOLERANCES AS PER CO.STD.NO.11001.
- REMOVE ALL SHARP BURRS AND SHARP EDGES.

UNMENTIONED	
RADII	
CHAMFER	
UNDERCUT	

PROJECT/ CUSTOMER NAME	
CAD DRG. FILE	
MATERIAL	
DRN	MONALI
CHD.	MBT
APPD.	MBT
DATE	15.02.2024

KALA GENSET PVT LTD.
PUNE 410501 (INDIA)

DRAWING No.-4R1190ETA/82.5kVA/FD/01
REV. No. 00
SHEET :- 1 OF 1
SCALE :- 1:1

TITLE
FOUNDATION PLAN DRAWING FOR 4R1190ETA 4G1_82.5 kVA

FIRST ANGLE PROJECTION