
TASK 1 | MAIN DISTRIBUTION, PROTECTION AND METERING

REV03 | 380/220 V, 3-phase 4-wire + PE | Single-line diagram, not to scale | Normal supply only

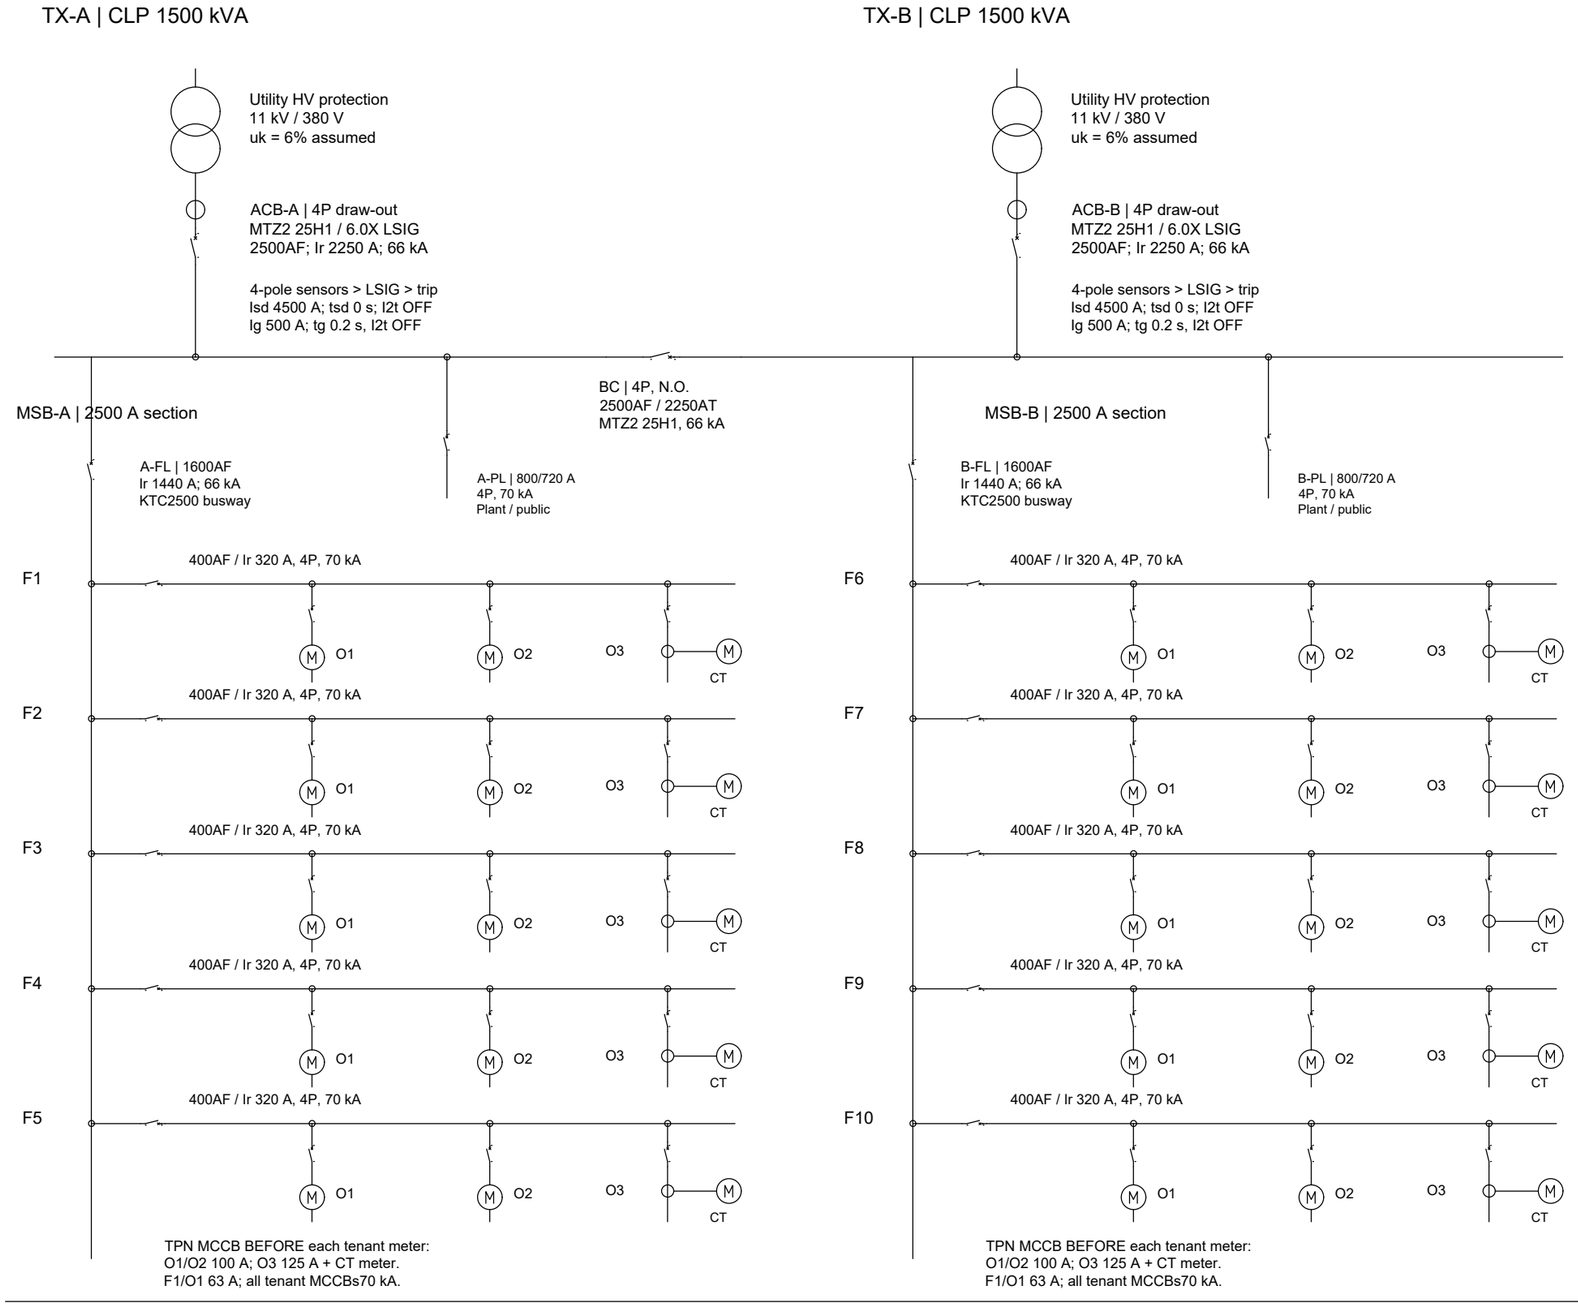

F1 / OFFICE 1 | DETAILED FEEDER

From F1 320 A floor MCCB
MS-O1: ComPacT NSX100H
C10H4TM063, 4P4D TM63D
Ir 63 A; Icu/Ics 70 kA
Suitable for isolation

CLP tenant meter
Immediately after MS-O1

4C35 mm2 PVC Cu
+ separate CPC16 mm2
L = 31.5119 m
28.5119 plan + 3 m allowance

DB-O1: 100 A 4P isolator
15 x 1P+N Type A 30 mA RCBO
7 lighting + 8 power circuits


PE continuous; neutral switched with phases.
No customer N-PE link at DB.

ACB-A / ACB-B / BC INTERLOCK

Electrical AND mechanical interlock
Normal: CLOSED / CLOSED / OPEN
Transfer from A: CLOSED / OPEN / CLOSED
Transfer from B: OPEN / CLOSED / CLOSED
ALL THREE CLOSED: PROHIBITED

Open/isolate failed incomer before closing BC.
Before transfer, shed load to <=1480.9 kVA
(2250 A at 380 V); no full-load N-1.
Utility return: open BC before restoring incomer.

CUSTOMER EARTHING

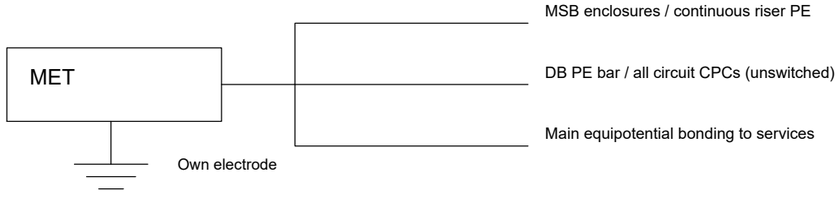

BASIS AND FAULT DUTY

CLP GuideToSupply v10: sections 2, 3, 7.4, 11.
MSB PFC <=56.92 kA incl. transfer motors.
Own MET/electrode; any CLP bond only by agreement, >=70 mm2 Cu. See Task 3 for loop, disconnection and conductor checks.
CT meters: CLP ratios +16 A HRC voltage fuses; Guide sections9.11 and9.16.

2672.216 kVA building demand | 1336.108 kVA / 2030 A per normal section | CT/sensor arrangement subject to CLP acceptance