

LEGEND AND SYMBOL

	SERVICE ENTRANCE
M	KILOWATT-HOUR METER
N	CIRCUIT HOMERUN
	AEL-512P LED EMERGENCY LIGHT, 2 X 1 LED, 0.5W/ LAMP, 4VC 4AH SEALED LEAD ACID BATTERY
	12 " DIA. HONEY COMBED DOME REFLECTOR, 220V, E27 BASE 1 X E27 6"; WITH GES LED BULB 25W WARM WHITE
	EUROLUX OPUS – MULTIPLE LED SMD SUPER FLAT ROUND DOWNLIGHT; 16W WW 7"
	EUROLUX OPUS – MULTIPLE LED SMD SUPER FLAT ROUND DOWNLIGHT; 10W WW 5"
	T8 LED FLURESCENT LAMP, 220V, 60HZ, DAYLIGHT 1.2 M, SLIM BOX TYPE
S	LED LIGHTED "TOMS WORLD" ACRYLIC SIGNAGE; MEDIUM
	DUPLEX CONVENIENCE OUTLET
	SURFACE TYPE CONVENIENCE OUTLET
LP/PP	POWER PANEL
PB	PULL BOX
J	JUNCTION BOX
SB	SWITCH BOARD
	OWNER SUPPLY (PTZ) WALL MOUNTED PAN TILT ZOOM CAMERA (ON EMT WIRING CONDUIT)
	UTP CABLE AMP FOR REDEMTION
	COMPUTER DATA NETWORK/TELEPHONE OUTLET
	CIRCUIT BREAKER

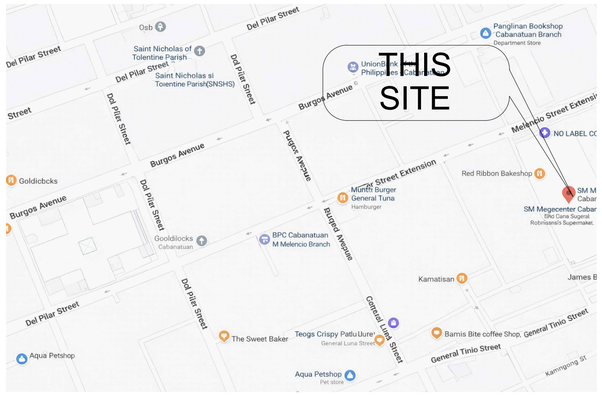

1 / E 1 **VICINITY MAP**

NTS

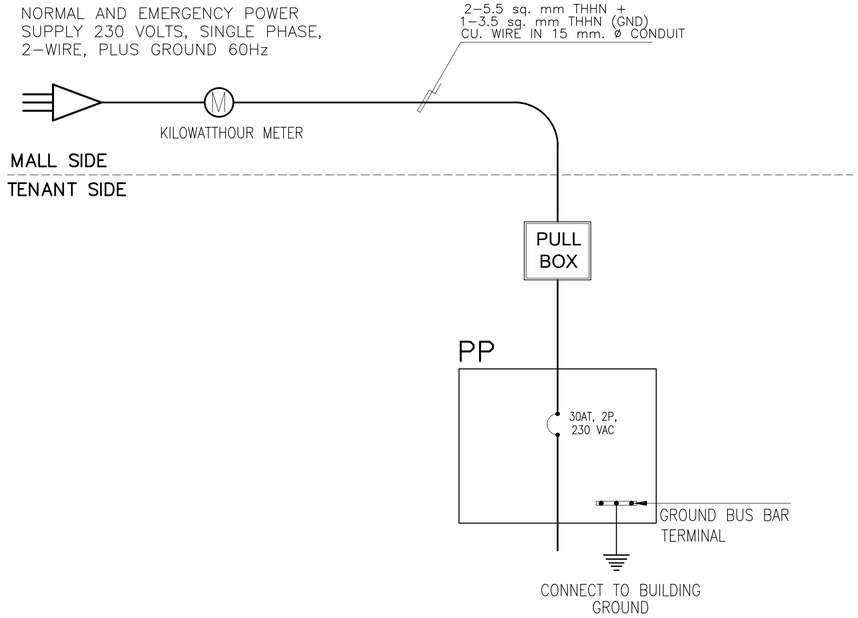

3 / E 1 **RISER DIAGRAM**

NTS

2 / E 1 **SITE DEVELOPMENT PLAN**

NTS

GENERAL NOTES

1. ALL ELECTRICAL WORKS HEREIN SHALL BE DONE IN ACCORDANCE WITH THIS PLAN AND SPECIFICATION. THE APPLICABLE PROVISION OF THE LATEST EDITION OF THE PHILIPPINE ELECTRICAL CODE, BY THE RULES AND REGULATIONS OF THE LOCAL ENFORCING AUTHORITIES AND THE REQUIREMENTS OF THE LOCAL POWER AND TELEPHONE COMPANIES.
2. POWER SERVICE ENTRANCE VOLTAGE SHALL BE 230V, SINGLE PHASE, 2-WIRES PLUS GROUND, 60 HZ SYSTEM
3. ALL EXPOSED CONDUIT RUN SHALL BE INSTALLED PARALLEL TO OR PERPENDICULAR WITH THE BUILDING LINE AND SUPPORTED BY CONDUIT CLAMPS FOR EVERY 1.5 METER DIAGONAL CONDUIT RUN SHALL NOT BE ACCEPTED
4. THE ELECTRICAL WIRING INSTALLATION SHALL BE AS FOLLOWS, USE EMT OR RSC INSIDE CEILING OR EXPOSED LOCATION FOR POWER, LIGHTING AND TELEPHONE SYSTEM. MINIMUM SIZE FOR ALL CONDUITS SHALL BE MANUFACTURED BY 16 MM DIA. ELECTRICAL TRADE SIZE.
5. WHENEVER NECESSARY PULLBOXES OF PROPER SIZE AND DIMENSION SHALL BE PROVIDED ALTHOUGH NOT INDICATEED IN THE PLAN. ALL JUNCTION BOXES SHALL BE PROVIDED WITH METAL PLATE COVER.
6. ALL RECEPTACLE OUTLET SHALL BE OF HEAVY DUTY STANDARDS AND PROPERLY GROUNDED TO THE BOX BY MEANS OF GROUNDING LUGS.
7. ALL ELECTRICAL PANELBOARD MAIN AND BRANCH CIRCUIT BREAKER SHALL BE BOLT-ON AND INDUSTRIAL TYPE
8. ALL FLUORESCENT LAMP SHALL BE ENERGY EFFICIENT TYPE, WITH THE ELECTRONIC BALLAST OF LESS THAN 10% TOTAL HARMONIC DISTORTION (THD), SPRING LOADED LAMP HOLDERS
9. ALL LIGHT CONTROLLED SWITCHES SHALL BE RATED 15 AMPS, 220V A.C. ONLY SWITCHES SHALL BE INSTALLED FOR VERTICAL ALIGNMENT
10. ALL PANELBOARD SHALL BE PROVIDED WITH SOLID GROUNDING BUS TERMINAL
11. ALL METALLIC CONDUIT , CABINET ,BOXES AND EQUIPMENT SHALL BE PROPERLY GROUNDED AND BONDED
12. ALL MATERIALS TO BE USED SHALL BE BRAND NEW AND MUST BE APPROVED FOR THE PARTICULAR LOCATION AND PURPOSES INTENDED
13. PROVIDE GROUNDING SYSTEM TO ALL LIGHTING AND POWER CIRCUITS AS PER PHILIPPINE ELECTRICAL CODE EQUIVALENT
14. ALL ELECTRICAL WIRES SHALL BE STRANDED WIRE TYPE THHN (PHELPS DODGE BRAND), USE OF SOLID WIRES AND TW WIRES ARE NOT ALLOWED.
15. PROVIDE PULL WIRES IN ALL SPARES DUCT AND EMPTY CONDUITS
16. MOUNTING HEIGHTS OF WIRING DEVICES SHALL BE AS FOLLOWS
    a: CONVENIENCE OUTLET AT 300MM AFF
    b: TELEPHONE OUTLETS AT 400MM AFF
    c: LIGHT SWITCHES AT 1400MM AFF
    d: PANELBOARD WITH 100CM HIGH OR LESS SHOULD BE LOCATED 135 CM FROM FLOOR TO THE CENTER LINE OF THE BOX UNLESS OTHERWISE INDICATED IN THE PLAN.
17. PULL BOXES SHALL BE USED FOR EASY PULLING WHEN IT APPLICABLE FOR WIRES AND SHALL BE ACCORDING TO CODE REQUIREMENTS.
18. NO OPEN WIRING FLAT CORD, BX WIRE, PVC, PVC FLEXIBLE CONDUIT ALLOWED.
19. THE ELECTRICAL CONTRACTOR SHOULD REFER TO ARCH'L DRAWINGS FOR THE EXACT LOCATION AND MOUNTING HEIGHT OF ALL VISIBLE WIRING DEVICES, FIXTURES AND THE LIKES
20. THE ELECTRICAL CONTRACTOR SHALL CONDUCT AMPERE LOAD TEST PRIOR AND AFTER TERMINATION OF EQUIPMENTS FOR PROPER LOAD BALANCING OF THE NEW AND EXISTING ELECTRICAL SYSTEM.
21. ALL ELECTRICAL WORKS HEREIN SHALL BE DONE UNDER THE DIRECT AND IMMEDIATE SUPERVISION OF A DULY LICENSED ELECTRICAL ENGINEER
22. THE ELECTRICAL CONTRACTOR IS REQUIRED TO VISIT THE SITE TO ASCERTAIN HIMSELF TO THE LOCAL CONDITIONS THAT MAY AFFECT HIS WORK.
23. THE ELECTRICAL CONTRACTOR SHALL SECURE ALL WIRING PERMITS AND ALL FEES REQUIRED FOR THE WORK AND SHALL FURNISH THE OWNER THROUGH THE ENGINEERS. FINAL CERTIFICATES OF ELECTRICAL INSPECTION AND APPROVAL FROM PROPER GOVERNMENT AUTHORITIES FOR COMPLETE WORK.
24. ALL WIRES AND CABLES SHALL BE COLOR CODED AS FOLLOWS:
    PHASE A - - - - - - - - - - - - - - - - BLACK
    PHASE B - - - - - - - - - - - - - - - - RED
    PHASE C - - - - - - - - - - - - - - - - BLUE
    NEUTRAL- - - - - - - - - - - - - - - - WHITE
    GROUND - - - - - - - - - - - - - - - - GREEN
25. ALL MOUNTING HEIGHTS ARE SUBJECT TO APPROVAL OF THE ARCHITECT / ENGINEER.

TOM'S WORLD

FERDINAND BULAN
PROFESSIONAL ELECTRICAL ENGINEER
PRC NO. 4588 | TIN. 252-326-848
PTR NO. 8397614 | PLACE : QUEZON CITY
DATE : 01-05-2026

OWNER: TOM'S WORLD

APPROVED BY: –

PROJECT TITLE / LOCATION: PROPOSED TOM'S WORLD AMUSEMENT

SM MEGACENTER CABANATUAN CITY

	NAME	SIGNATURE	DATE
CAD BY:	M. DEJARESCO		
CHECKED BY:	A. FERNANDEZ		
OWNER :			

REVISION MARK	DESCRIPTION

SHEET CONTENTS: AS SHOWN

SHEET NO.: E - 1, E - 2