


TNE10006/TNE60006 – Sample Mid-Sem Skills Assessment (Option B)

Network Topology and Addressing Table

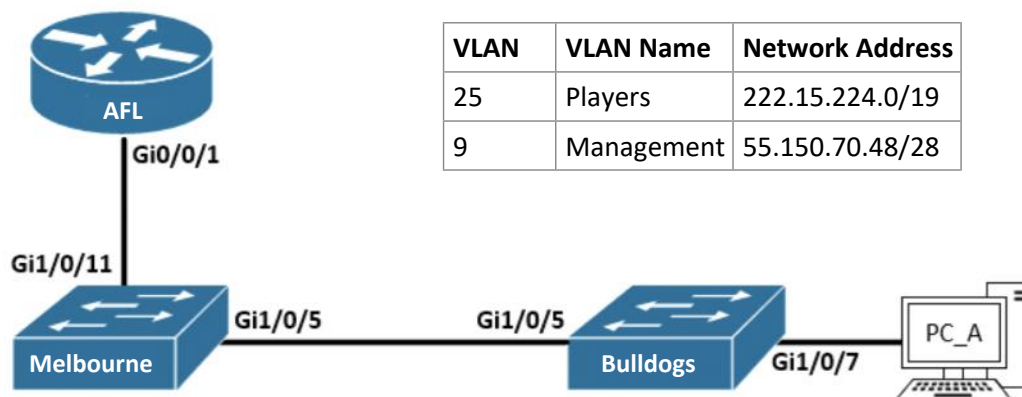

Note: use Cisco Catalyst 3650 switches and a Cisco 4321 router to build the network. If using ATC devices, use Router 1 for AFL, Switch 3 for Melbourne and Switch 4 for Bulldogs.

Complete the following tasks:

- Configure the hostname on **all devices**
- Configure a MOTD on **all devices**
- Configure interface descriptions on all **AFL** sub-interfaces
- Allocate switchports **Gi1/0/7-10** on **Bulldogs** to the **Players** VLAN
- Configure inter-VLAN routing using the **router-on-a-stick** approach
- All **AFL** interfaces must be configured with the **last usable** IP address in the allocated range
- **Melbourne** management IP must be the **2nd usable** address in the range
- **Bulldogs** management IP must be the **3rd usable** address in the range
- Configure **Loopback0** interface on **AFL** in subnet **117.20.150.32/29**
- Enable port-security on access ports for the **Players** VLAN. Configure **sticky** MAC address learning and **restrict** as the violation action.