

File Edit View Run Tools Help



audio x receptormonofonico x

Options


ID: fm_mono_radio
Generate Options: WX GUI

osmocom Source

Sample Rate (sps): 5M
Ch0: Frequency (Hz): 105.3M
Ch0: Freq. Corr. (ppm): 0
Ch0: DC Offset Mode: Off
Ch0: IQ Balance Mode: Off
Ch0: Gain Mode: Manual
Ch0: RF Gain (dB): 10
Ch0: IF Gain (dB): 20
Ch0: BB Gain (dB): 20

WX GUI Slider

ID: volumen
Label: volumen
Default Value: 1
Minimum: 0
Maximum: 10
Converter: Float

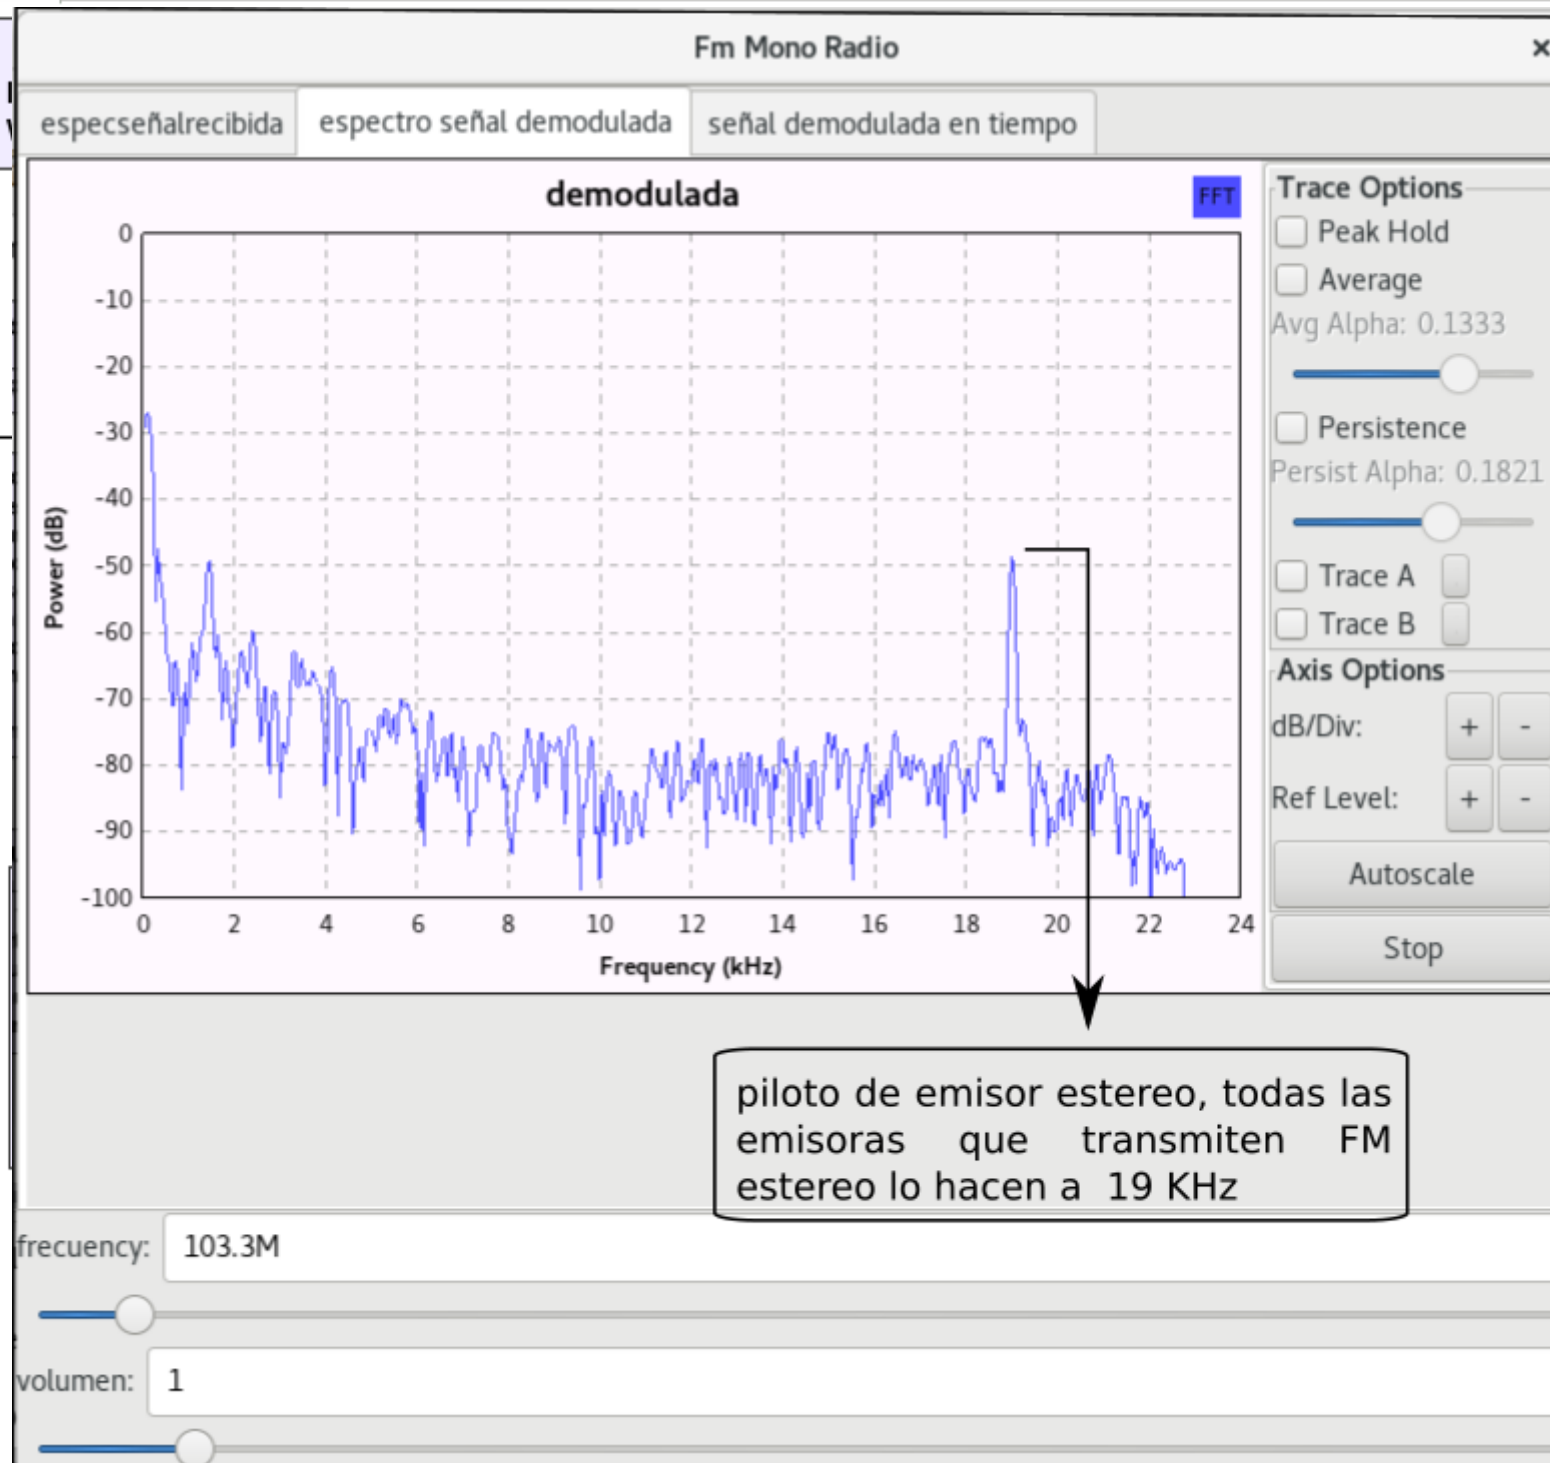

WX GUI Scope Sink

Title: Scope Plot
Sample Rate: 5M
Notebook: nb, 2
Trigger Mode: Auto
Y Axis Label: Counts

WX GUI FFT Sink

Title: FFT Plot
Sample Rate: 5M
Baseband Freq: 0
Y per Div: 10 dB
Y Divs: 10
Ref Level (dB): 0
Ref Scale (p2p): 2
FFT Size: 1.024k
Refresh Rate: 15
Notebook: nb, 1
Freq Set Varname: None

Este bloque proporciona la gráfica de una señal conectada a su entrada. (En este caso nos muestra el espectro de la señal demodulada)