

File Edit View Run Tools Help



audio x receptormonofonico

### Options


ID: fm\_mono\_radio  
Generate Options: WX GUI

### osmocom Source

Sample Rate (sps): 5M  
Ch0: Frequency (Hz): 105.3M  
Ch0: Freq. Corr. (ppm): 0  
Ch0: DC Offset Mode: Off  
Ch0: IQ Balance Mode: Off  
Ch0: Gain Mode: Manual  
Ch0: RF Gain (dB): 10  
Ch0: IF Gain (dB): 20  
Ch0: BB Gain (dB): 20

### WX GUI Slider

ID: volumen  
Label: volumen  
Default Value: 1  
Minimum: 0  
Maximum: 10  
Converter: Float

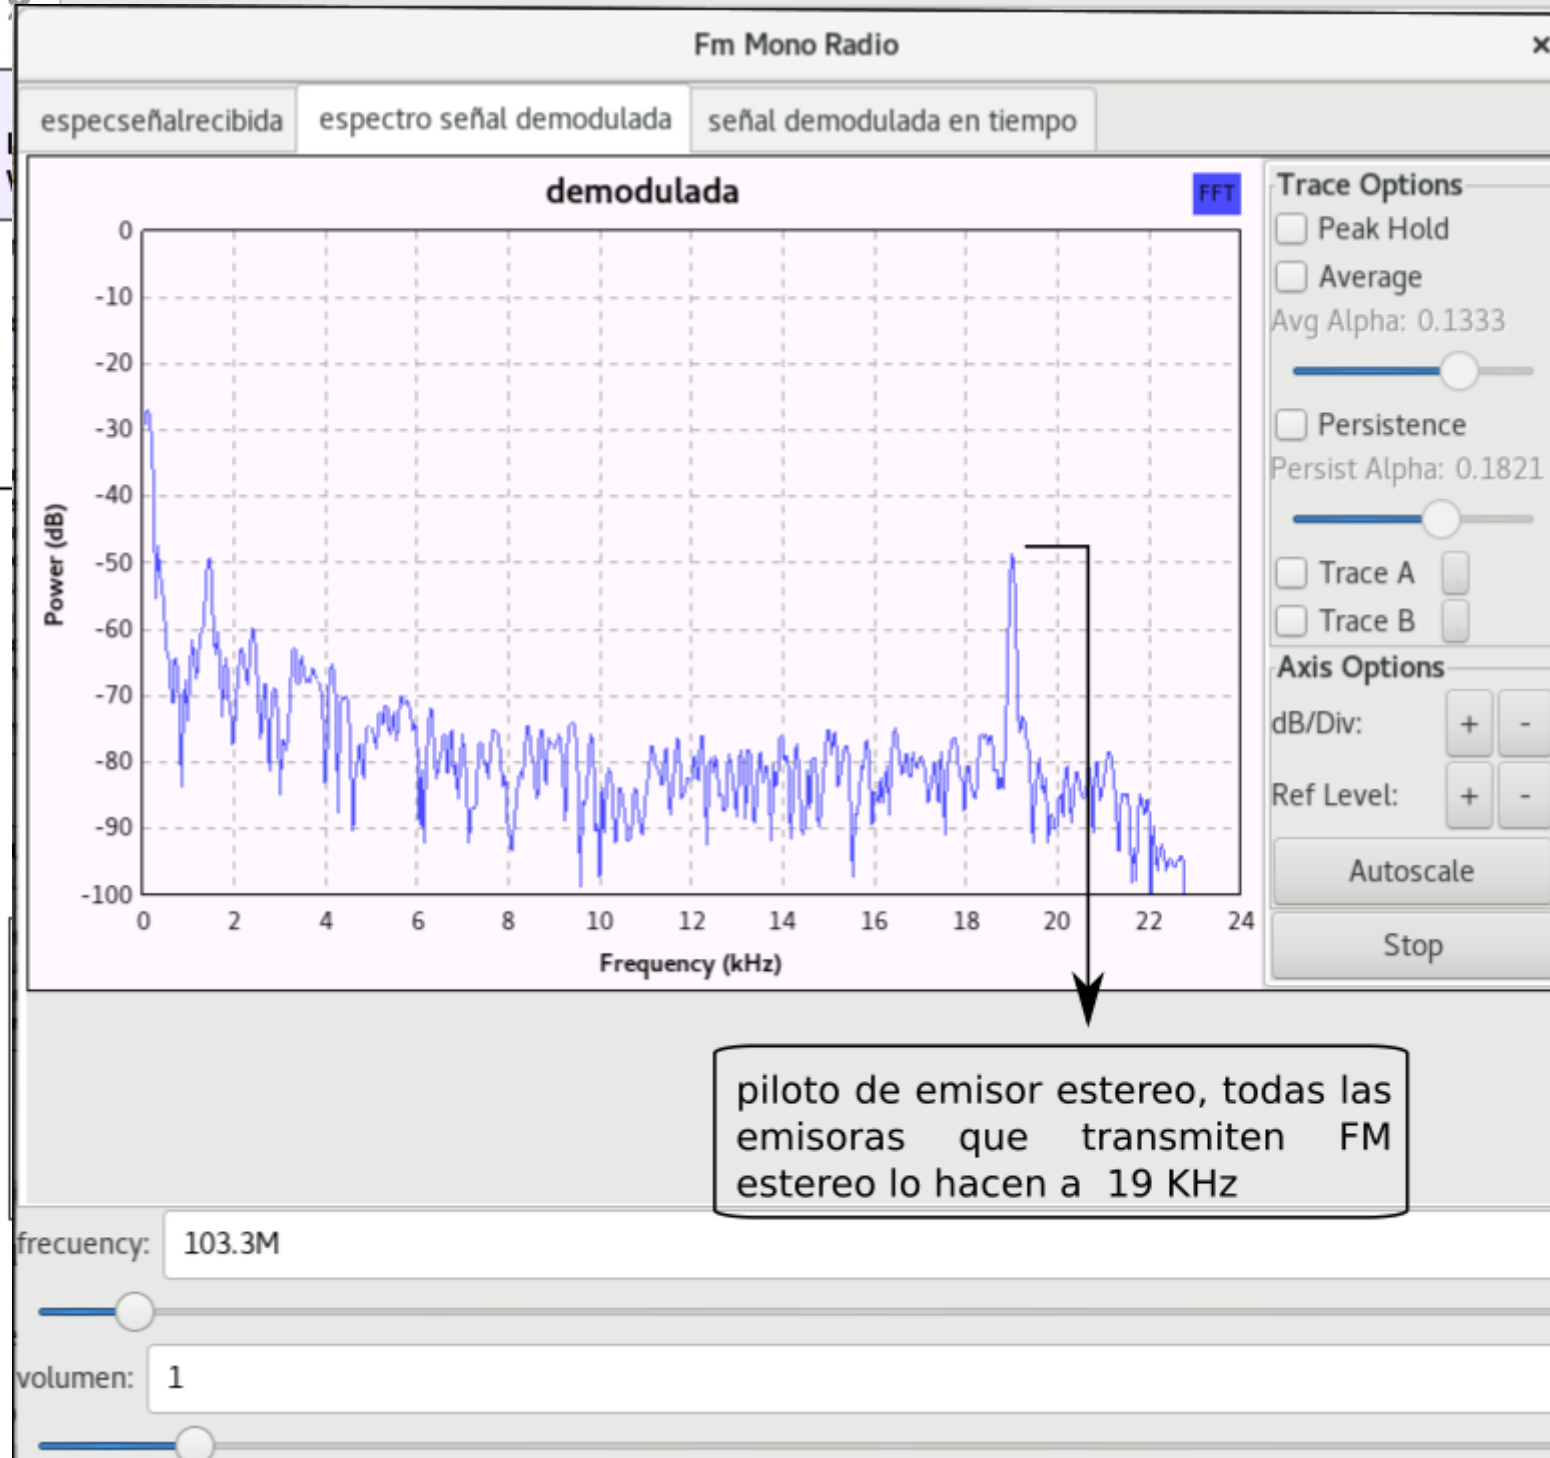

### WX GUI Scope Sink

Title: Scope Plot  
Sample Rate: 5M  
Notebook: nb, 2  
Trigger Mode: Auto  
Y Axis Label: Counts

### WX GUI FFT Sink

Title: FFT Plot  
Sample Rate: 5M  
Baseband Freq: 0  
Y per Div: 10 dB  
Y Divs: 10  
Ref Level (dB): 0  
Ref Scale (p2p): 2  
FFT Size: 1.024k  
Refresh Rate: 15  
Notebook: nb, 1  
Freq Set Varname: None

o Sink  
ate: 48KHz

Este bloque proporciona la gráfica de una señal conectada a su entrada. (En este caso nos muestra el espectro de la señal demodulada)