

File Edit View Run Tools Help



audio x receptormonofonico x

Options
ID: fm_mono_radio
Generate Options:

osmocom So
Sample Rate (sps):
Ch0: Frequency (Hz):
Ch0: Freq. Corr. (ppm):
Ch0: DC Offset Mode:
Ch0: IQ Balance Mode:
Ch0: Gain Mode: Manual
Ch0: RF Gain (dB):
Ch0: IF Gain (dB):
Ch0: BB Gain (dB):

WX GUI Slice
ID: volumen
Label: volumen
Default Value:
Minimum: 0
Maximum: 10
Converter: F

Properties: WX GUI Notebook

General Advanced Documentation

ID: nb

Tab Orientation: Top


Labels: [señal recibida, 'espectro señal demodulada', 'señal ...n el tiempo']

Grid Position:

Notebook:

En la casilla "labels" irá el nombre que deseamos poner a cada una de las señales que se van a mostrar.

Aceptar Cancelar Aplicar

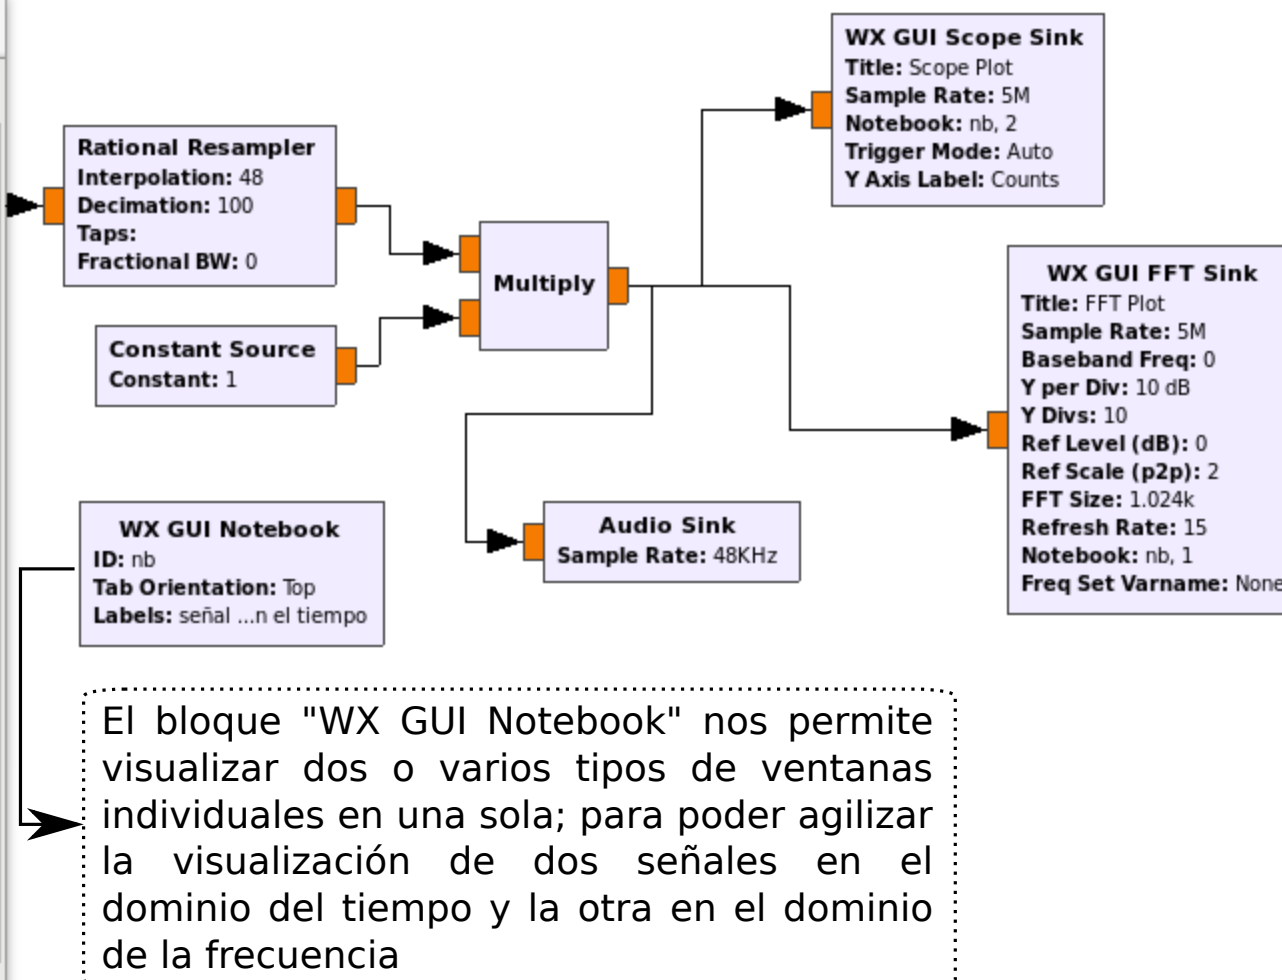

>>> Done

Id Value