

File Edit View Run Tools Help



audio x receptormonofonico x

Options
ID: fm_mono_radio
Generate Options: WX GUI

Variable
ID: samp_rate
Value: 2M

Variable
ID: fm_samp
Value: 200k

Variable
ID: audio_rate
Value: 48k

osmocom Source
Sample Rate (sps): 2M
Ch0: Frequency (Hz): 103.3M
Ch0: Freq. Corr. (ppm): 0
Ch0: DC Offset Mode: Off
Ch0: IQ Balance Mode: Off
Ch0: Gain Mode: Manual
Ch0: RF Gain (dB): 10
Ch0: IF Gain (dB): 20
Ch0: BB Gain (dB): 20

WX GUI Slider
ID: volumen
Label: volumen
Default Value: 1
Minimum: 0
Maximum: 10
Converter: Float

ID: 1
Lab
Def
Min
Max
Con

Properties: osmocom Source

General Advanced Documentation

ID: osmosdr_source_0

Output Type: Complex float32

Device Arguments:

Sync: don't sync

Num Mboards: 1

Mb0: Clock Source: Default


Mb0: Time Source: Default

Num Channels: 1

Sample Rate (sps): 2e6

Ch0: Frequency (Hz): 103.3e6

Ch0: Freq. Corr. (ppm): 0

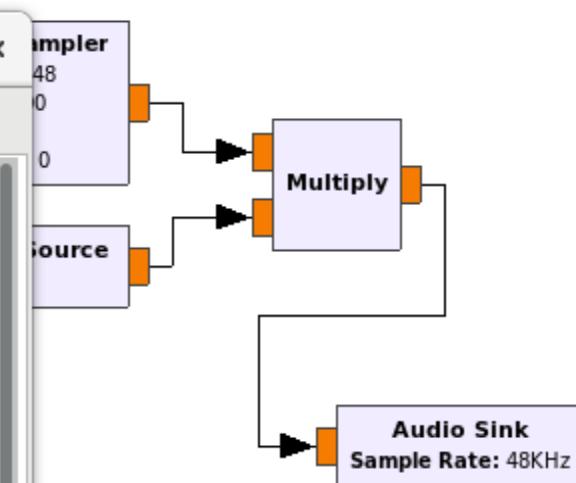

se agrega la frecuencia ingresada
en el bloque "variable"

ID: samp_rate 2 MHz

Se sintoniza la frecuencia
definida, en este caso 103.3 Mhz

Core

- Audio
- Boolean Operators
- Byte Operators
- Channelizers
- Channel Models
- Coding
- Control Port
- Debug Tools
- Deprecated
- Digital Television
- Equalizers
- Error Coding
- FCD
- File Operators
- Filters
- Fourier Analysis
- GUI Widgets
- Impairment Models
- Instrumentation
- Level Controllers
- Math Operators
- Measurement Tools
- Message Tools

microondas/audio.grc"

>>> Done

Loading: "/home/daniel/receptormono

>>> Done