




## POWER & FILTERING

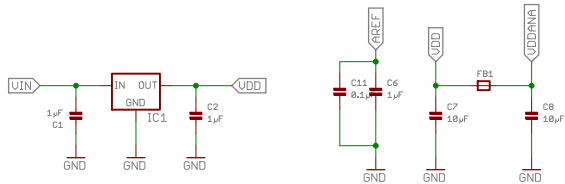

## I2C PULL-UP | SWCLK PULL-UP | LED RES



## STATUS LED

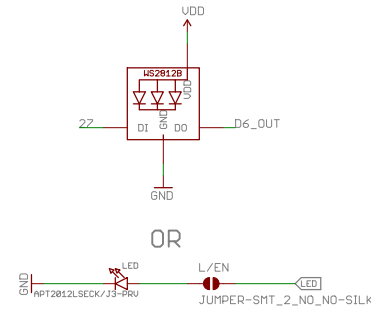

You may populate both the WS2812B and the 0805 LED. OR you may leave the WS2812B unpopulated and connect the L/EN jumper. Be aware that if both are populated and the jumper is connected, the LED may flash as data is sent to the WS2812B.

## USB CONNECTION

