


Insulation Takeoff

Use this order every time: select the right pages, define areas, calibrate each measured page, trace the scope, review the worksheet, then create the quote PDF.

GOAL
Plan PDF to quote PDF

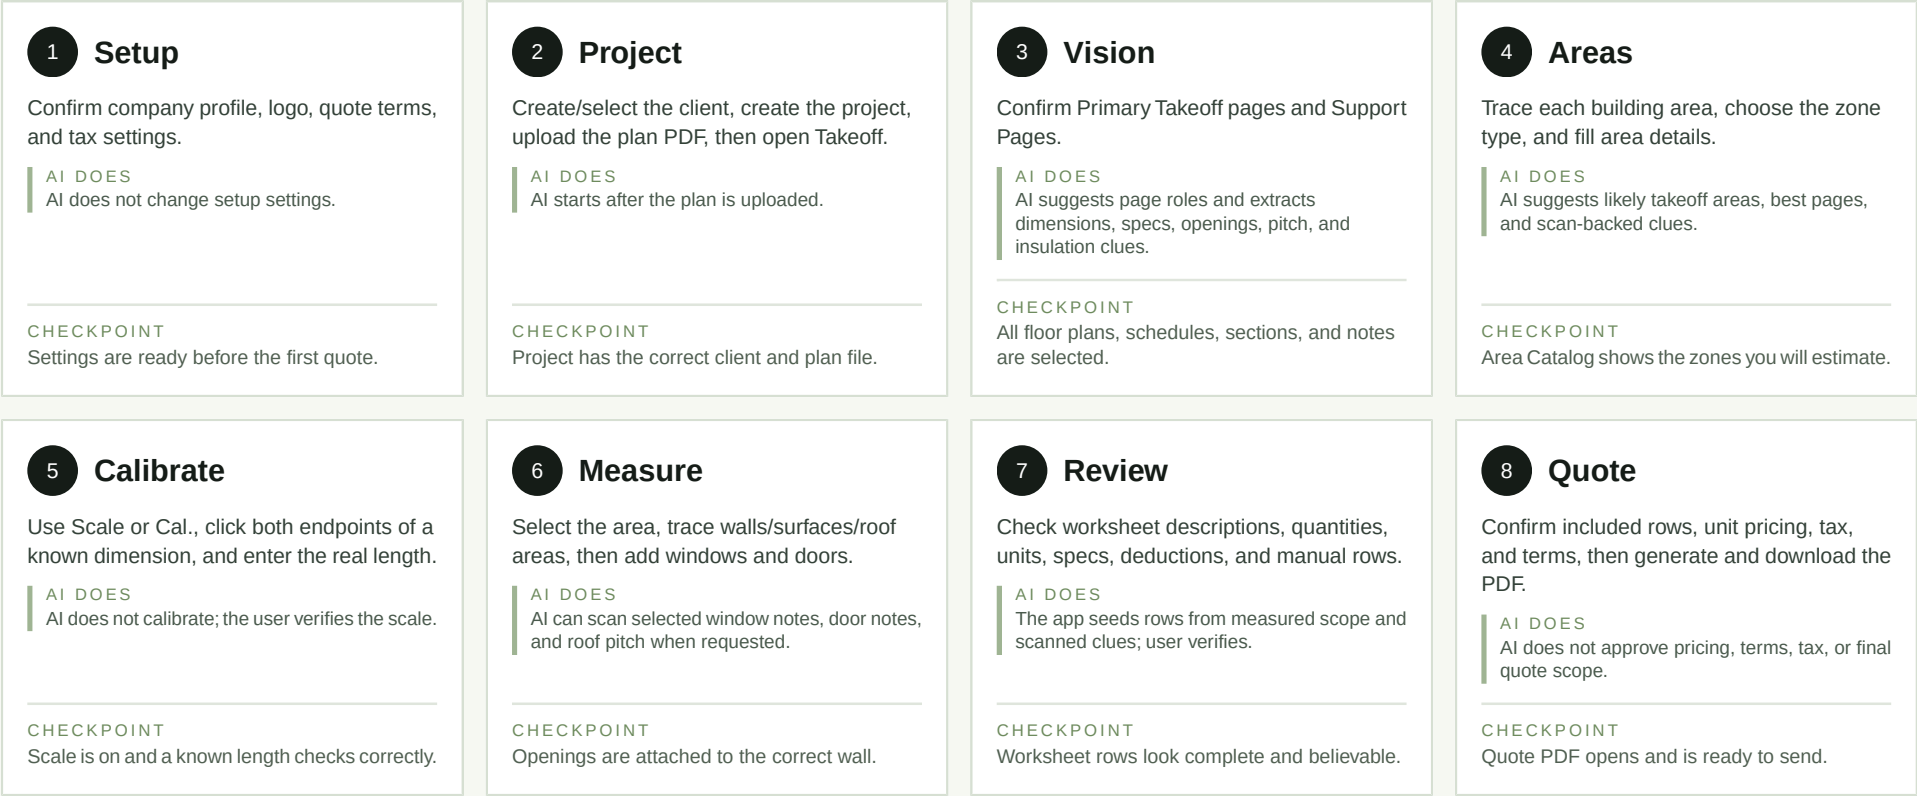

MAIN RULE Do not measure before calibration. Do not quote before worksheet review. Every measured wall, surface, window, and door should belong to the correct area.

AI RULE AI suggests page roles, support evidence, area hints, opening sizes, and roof pitch. The user confirms every page, calibration, traced area, opening, worksheet row, and quote.

Tool Sequence

This page explains the practical order for calibration, measuring, and finishing the estimate.

How to work through the tools

Calibration

- Pick a long printed dimension.
- Click Scale or Cal.
- Click endpoint A, then endpoint B.
- Enter the real length.
- Confirm Scale on.
- Compare one known dimension before measuring.

Measuring

- Select the correct area first.
- Use 6 inch wall for 2x6/exterior wall scope.
- Use 4 inch wall for 2x4/interior/shared wall scope.
- Use Surface for attic, crawlspace, garage ceiling, sound, cathedral, or cantilever scope.
- Use Roof for pitch-adjusted or vaulted ceiling areas.
- Use Win scan and Door scan after selecting the related wall. AI reads the selected note; user saves or overrides.

Finish

- Review worksheet rows before pricing.
- Check opening deductions under the right wall.
- Add manual rows for special scope.
- Confirm unit prices, tax, and terms.
- Generate the quote and download the PDF.

Stop and fix before continuing when...

The page is not calibrated.

A known length does not match after calibration.

A wall or surface is assigned to the wrong area.

A window or door is not tied to the correct wall.

A worksheet row has the wrong unit, R-value, or quantity.