PRICE SCOPE: only the Nudura ICF formwork and associated accessories are included in our price.
All other structure and information shown is supplied in good faith for coordination only and must be checked by the relevant professional.

QUOTATION - NOT FOR CONSTRUCTION

T1 FINK (W) TRUSS - 30 No. (1:50)

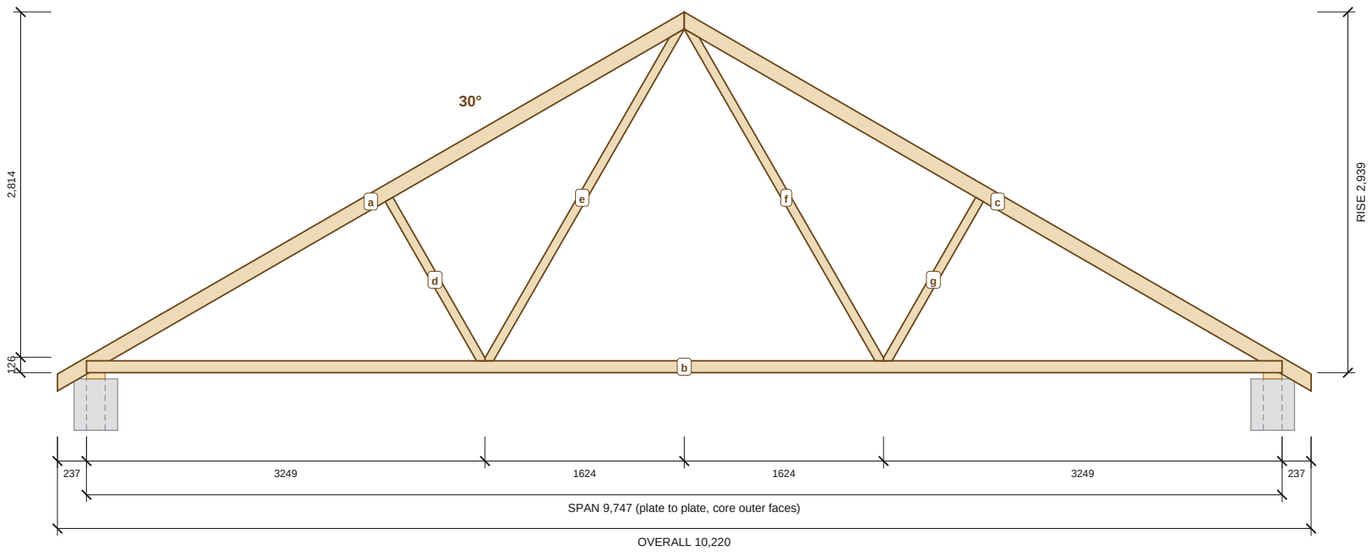

TRUSS TYPES

T1 FINK - 30 NO.

	Member	Section	Length
a	top chord	35x120 TR26	5,901
b	bottom chord	35x97 TR26	9,747
c	top chord	35x120 TR26	5,901
d	web	35x72 TR26	1,631
e	web	35x72 TR26	3,256
f	web	35x72 TR26	3,256
g	web	35x72 TR26	1,631

Span 9,747, overall 10,220, pitch 30 deg, rise 2,939, heel 126 (plate top to top of top chord over the core outer face), overhang 237 past the core face. Plate +5,370, apex +8,309.

NOTES

1. FOR SUPPLIER QUOTES ONLY. The trussed rafter manufacturer designs the final trusses (members, joints, nail plates, bracing) to BS EN 1995-1-1 for the stated loads and confirms all sizes before manufacture.
2. Profiles drawn to scale from the quotation model member geometry: TR26 strength class, 35 wide members, nail-plated joints. Member marks a, b, c ... refer to the member tables.
3. Design brief (to be confirmed): concrete interlocking tiles on battens and breathable membrane, plasterboard ceiling, loft not habitable, Castleside DH8 (site ~200 m AOD, exposed): snow and wind loads to the manufacturer's site check.
4. Trusses bear on 50 deep wall plates on the ICF core of the eaves walls (plate top +5,370).
5. Gable ladders, binders, bracing and clips are listed on ES26-080-RF-03.

REVISIONS

REV	DATE	DESCRIPTION
Q01	19.10.26	First issue

Nudura™ BuildEase

CLIENT	PROJECT
Wannop Developments Ltd	Land to Rear of 1-8 Wesley Terrace, Castleside

DRAWING TITLE
T01 TERRACE OF 3 - TRUSS PROFILES

Trussed rafter profiles for supplier quotation

SCALE	SIZE	DATE
AS SHOWN	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-080-RF-04	Q01

Do not scale. All dimensions in mm. Check all dimensions on site.