

**Rout
Enterprises**

FASTENING GLOBAL CONNECTIONS



STAINLESS STEEL FASTENERS

World-Class

Stainless Steel Products for Every Application

Rout Enterprises offers over 50,000 SKUs across grades like Austenitic, Ferritic, Martensitic, Duplex and Electrode—engineered for reliability, performance and global standards.



WIRE RODS

Size Range	5.5 mm to 39.5 mm
Applications	Shipbuilding, automotive, petroleum, agriculture, welding
Standards	ASTM, DIN, BS, JIS, AWS
Key Features	Customised strength and precision for diverse industrial needs



WIRES

Size Range	0.09 mm to 15 mm
Applications	Medical, food processing, automotive, agriculture
Standards	ASTM, DIN, BS, JIS, AWS
Key Features	Available in fine wire spooling, TIG wire straightening, and random winding



FLANGES

Size Range	½" to 40"
Applications	Oil & gas, chemical, petrochemical, power, marine
Standards	International (ASME, ANSI, DIN, etc.)
Key Features	Types include Blind, Weld Neck, Slip-on, Threaded; designed for high-pressure and high-temperature operations



BRIGHT BARS

Size Range	3 mm to 600 mm (in Round, Hexagon, Square, Flat shapes)
Applications	Aerospace, automotive, railways, oil & gas, engineering
Standards	International quality standards with ultrasonic and eddy current testing
Key Features	Cold-finished and defect-tested for dimensional accuracy and durability



PROFILES

Size Range	Custom profiles as per client specifications
Applications	Construction, architecture, communication towers, shipbuilding, power
Standards	Tested via tensile, ultrasonic, and impact methods
Key Features	High-strength and precision-engineered for structural stability



SEAMLESS & WELDED PIPES

Size Range	As per industrial specifications
Applications	Fluid/gas transport, pressure systems, structural use
Standards	ASTM, ASME, EN and more
Key Features	Built for long-lasting performance, corrosion resistance, and leak-proof reliability

Comprehensive Range

for Every Industry




BOLTS

Available in a wide range of grades and sizes, suitable for standard to heavy-duty applications, ensuring reliable fastening solutions for every project.



NUTS

Complementing our bolts, our nuts come in various strengths and grades, offering secure fastening options for a variety of uses.

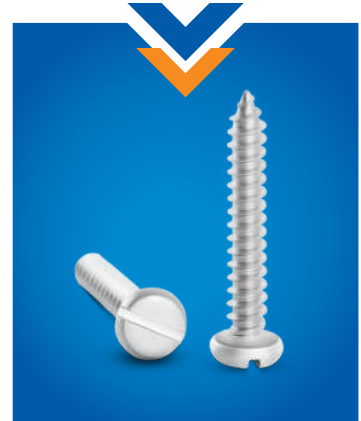

SCREWS

Designed for precision, our screws are available in both standard and custom sizes, engineered to meet the specific needs of your applications.



WASHERS

From flat washers to spring washers, our washers are designed to distribute load and provide support, ensuring reliable fastening performance.



THREADED RODS

Ideal for use in a range of industrial applications, threaded rods offer versatile solutions for secure fastening over long distances.



DOWEL SCREWS

Precision-engineered for strong, corrosion-resistant fastening in wood-to-wood or wood-to-metal applications. Ideal for furniture and construction use, they ensure durability and easy installation.

Grades & Property Classes :

Our fasteners are available in a variety of grades and property classes that suit diverse industry requirements. These include:

Grades: 304, 304L, 316, 316L, 316Ti, 200 series, Alloy Group A2, and A4.

Property Class for Bolts & Screws: A2-70, A2-80, A4-70, A4-80, F593C, F593D, F593G, F593H, A4-070, A2-070, A2, A4, A2-50, A4-50, A5-70.

Property Class for Nuts: A2-70, A2-80, A4-70, A4-80, F594C, F594D, F594G, F594H, A2-035, A4-040, A5-70, 8, 8M.

Property Class for SHCS: F837B, F837E, A2-70, A4-70, A2-80, A4-80.

Property Class for Threaded Rods: A2-70, A2-80, A4-70, A4-80, F593C, F593D, F593G, F593H, B8, B8M & CL2.



Dimensional Specifications

Rout Enterprises offers stainless steel fasteners in a comprehensive range of **sizes, shapes, and standard thread configurations** to meet the precise needs of various industries. Our fasteners are manufactured to comply with globally recognized dimensional standards, ensuring **accuracy, compatibility, and ease of installation** across diverse applications.

We provide:

- **Bolts & Screws:** M3 to M39 | 1/4" to 1 1/2"
- **Nuts:** M5 to M27 | 1/4" to 1"
- **Washers & Threaded Rods:** Custom sizes available upon request
- Each fastener is engineered with strict tolerances to deliver **optimal fit, durability, and performance**, making it suitable for demanding environments such as construction, automotive, marine, and heavy engineering. For custom dimensions and specialized requirements, we offer tailored solutions to match project-specific needs.

20,000 SKUs & More

More than 20,000 SKUs are manufactured at our Fastener Plant which are used across industries globally. These include:



HEXAGON HEAD BOLT

DIN 931/ISO 4014

ANSI B 18.2.1

Size	Length	Size	Length
M5	25-100	1/4"	1 1/4" - 6"
M6	25-150	5/16"	1 1/4" - 7"
M8	30-180	3/8"	1 1/2" - 10"
M10	35-250	7/16"	1 3/4" - 6"
M12	40-250	1/2"	1 7/8" - 10"
M14	45-250	9/16"	2" - 8"
M16	50-250	5/8"	2" - 10"
M18	60-250	3/4"	2 5/8" - 10"
M20	60-250	7/8"	2 3/4" - 10"
M22	70-250	1"	3 1/4" - 10"
M24	80-250	1 1/8"	4" - 14"
M27	90-350	1 1/4"	4" - 14"
M30	90-350	1 3/8"	4 1/2" - 14"
M33	110-350	1 1/2"	4 1/2" - 14"
M36	110-350		
M39	110-350		

HEXAGON HEAD SCREW

DIN 933/ISO 4017

ANSI B 18.2.1


Size	Length	Size	Length
M5	10-70	1/4"	3/8" - 6"
M6	10-150	5/16"	1/2" - 7"
M8	10-200	3/8"	5/8" - 8"
M10	16-200	7/16"	3/4" - 6"
M12	20-200	1/2"	3/4" - 8"
M14	25-200	9/16"	1" - 8"
M16	25-200	5/8"	1" - 8"
M18	40-200	3/4"	1 1/2" - 8"
M20	40-200	7/8"	1 1/2" - 8"
M22	40-200	1"	1 3/4" - 8"
M24	40-200	1 1/8"	2" - 6"
M27	50-200	1 1/4"	2-1/2" - 6"
M30	50-200	1 3/8"	3" - 6"
M33	60-200	1 1/2"	3" - 6"
M36	60-200		
M39	60-200		



HEXAGON SOCKET HEAD CAP SCREW

DIN912/ISO4762


Size	Length	
	F/T	H/T
M5	10 - 70	10 - 70
M6	10 - 100	35 - 150
M8	12 - 160	40 - 160
M10	16 - 150	45 - 150
M12	20 - 150	55 - 150
M14	30 - 150	60 - 150
M16	30 - 150	65 - 150
M18	50 - 200	70 - 200
M20	50 - 200	80 - 200
M22	50 - 200	80 - 200
M24	50 - 200	90 - 200

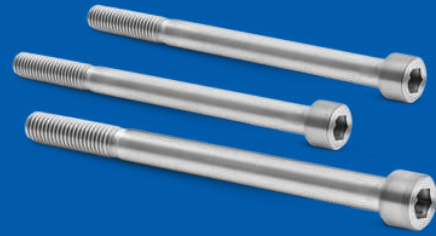

HEXAGON SOCKET HEAD CAP SCREW

ANSI B 18.3

Size	Length	
	F/T	H/T
1/4"	3/8" - 4"	1 1/2" - 6"
5/16"	1/2" - 6"	1 3/4" - 6"
3/8"	5/8" - 6"	1 3/4" - 6"
7/16"	3/4" - 6"	2" - 6"
1/2"	3/4" - 6"	2 1/4" - 6"
5/8"	1 1/4" - 6"	2 1/2" - 6"
3/4"	2" - 8"	3" - 8"
7/8"	2" - 8"	3 1/4" - 8"
1"	2" - 8"	3 1/2" - 8"
-	-	-
-	-	-

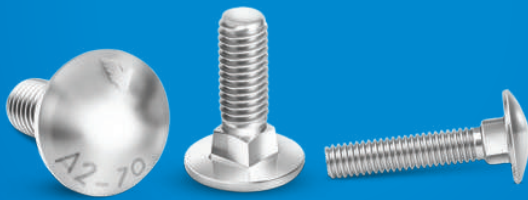

ROUND HEAD SQUARE NECK BOLT OR CARRIAGE BOLT

DIN 603

ANSI B 18.5

Size	Length		Size	Length	
	F/T	H/T		F/T	H/T
M 5	16 - 65	25-80	1/4"	5/8" - 3"	1-1/4" - 4"
M 6	16 - 80	35-150	5/16"	3/4" - 4"	1-1/2" - 6"
M 8	20 - 100	40-150	3/8"	3/4" - 4"	1-3/4" - 6"
M 10	20 - 100	45-150		-	



HEX WOOD/LAG SCREW

DIN 571

Size	Length
M5	25 - 70
M6	25 - 100
M8	30 - 150
M10	40 - 150
M12	45 - 150



HEXAGON SOCKET FLANGE BUTTON HEAD SCREW

ISO7380-2

Size	Length	Size	Length
M3	10 - 40	M8	12 - 150
M4	10 - 50	M10	16 - 150
M5	10 - 60	M12	20 - 150
M6	10 - 100		



HEXAGON SOCKET BUTTON HEAD SCREW

ISO7380-1

ANSI B 18.3

Size	Length	Size	Length
M3	10 - 40		
M4	10 - 50		
M5	10 - 60		
M6	10 - 100	1/4"	3/8" - 4"
M8	12 - 150	5/16"	1/2" - 6"
M10	16 - 150	3/8"	5/8" - 6"
M12	20 - 150	1/2"	3/4" - 6"



HEXAGON SOCKET COUNTERSUNK HEAD CAP SCREW

DIN7991/ISO10642

ANSI B 18.3

Size	Length			Size	Length	
	F/T	H/T DIN	H/T ISO		F/T	H/T
M3	10 - 40	25 - 40	30 - 40	-	-	-
M4	10 - 50	30 - 50	30 - 50	-	-	-
M5	10 - 75	35 - 75	35 - 75	-	-	-
M6	10 - 100	40 - 100	40 - 100	-	-	-
M8	12 - 150	50 - 150	50 - 150	1/4"	1/2" - 4"	1 3/4" - 4"
M10	16 - 200	50 - 200	55 - 200	5/16"	1/2" - 4"	2" - 6"
M12	20 - 200	60 - 200	65 - 200	3/8"	5/8" - 6"	2 1/4" - 8"
M14	40 - 200	60 - 200	70 - 200	1/2"	1" - 6"	2 1/2" - 8"
M16	40 - 200	70 - 200	80 - 200	5/8"	1 5/8" - 8"	3 1/4" - 8"
M18	40 - 200	70 - 200	-	3/4"	1 5/8" - 8"	3 1/2" - 8"
M20	40 - 200	80 - 200	100 - 200	-	-	-



SLOTTED CSK HEAD SCREW

DIN 963

Size	Length
M3	10 - 40
M4	10 - 50
M5	10 - 60
M6	10 - 80



SLOTTED RAISED CSK OVAL HEAD SCREW

DIN 964

Size	Length
M3	10 - 40
M4	10 - 50
M5	10 - 60
M6	10 - 80



SLOTTED CHEESE HEAD SCREW

DIN 84

Size	Length
M3	10 - 40
M4	10 - 50
M5	10 - 60
M6	10 - 80



SLOTTED PAN HEAD SCREW

DIN 85

Size	Length
M3	10 - 40
M4	10 - 50
M5	10 - 60
M6	10 - 80



HEXAGON FLANGE BOLT (FT) SERRATED/ NON SERRATED

DIN 6921/IS-15582

Size	Length	Size
	Min.	Max.
M8	20	40
M10	20	50



CROSS RECESSED CSK FLAT HEAD SCREW

DIN 965 TYPE H&Z/TORX

Size	Length
M3	10 - 40
M4	10 - 50
M5	10 - 75
M6	10 - 100
M8	12 - 150
M10	16 - 150



CROSS RECESSED RAISED CHEESE

DIN 7985 TYPE H&Z/TORX

Size	Length
M3	10 - 40
M4	10 - 50
M5	10 - 75
M6	10 - 100
M8	12 - 150
M10	16 - 150



CROSS RECESSED RAISED CSK OVAL HEAD SCREW

DIN 966 TYPE H & Z

Size	Length
M3	10 - 40
M4	10 - 50
M5	10 - 75
M6	10 - 100
M8	12 - 150
M10	16 - 150




Slotted Pan Head Tapping Screw		Slotted CSK Flat Head Tapping Screw		Slotted Raised CSK (Oval) Head Tapping Screw	
DIN-7971		DIN-7972		DIN-7973	
Size	Length	Size	Length	Size	Length
ST 2.9	9.5 - 38	ST 2.9	9.5 - 38	ST 2.9	9.5 - 38
ST 3.5	9.5 - 38	ST 3.5	9.5 - 38	ST 3.5	9.5 - 38
ST 3.9	9.5 - 38	ST 3.9	9.5 - 38	ST 3.9	9.5 - 38
ST 4.2	9.5 - 50	ST 4.2	9.5 - 50	ST 4.2	9.5 - 50
ST 4.8	9.5 - 60	ST 4.8	9.5 - 60	ST 4.8	9.5 - 60
ST 5.5	13 - 60	ST 5.5	13 - 60	ST 5.5	13 - 60
ST 6.3	13 - 60	ST 6.3	13 - 60	ST 6.3	13 - 60



Cross Recessed Pan Head Tapping Screw (TYPE H & Z)		Cross Recessed CSK Flat Head Tapping Screw (TYPE H & Z)		Cross Recessed Raised CSK (Oval) Head Tapping Screw (TYPE H & Z)	
DIN-7981		DIN-7982		DIN-7983	
Size	Length	Size	Length	Size	Length
ST 2.9	9.5 - 38	ST 2.9	9.5 - 38	ST 2.9	9.5 - 38
ST 3.5	9.5 - 38	ST 3.5	9.5 - 38	ST 3.5	9.5 - 38
ST 3.9	9.5 - 38	ST 3.9	9.5 - 38	ST 3.9	9.5 - 38
ST 4.2	9.5 - 50	ST 4.2	9.5 - 50	ST 4.2	9.5 - 50
ST 4.8	9.5 - 60	ST 4.8	9.5 - 60	ST 4.8	9.5 - 60
ST 4.8	13 - 60	ST 5.5	13 - 60	ST 5.5	13 - 60
ST 6.3	13 - 60	ST 6.3	13 - 60	ST 6.3	13 - 60

JIS B1181	Hexagon Nut	JIS B1190	Hexagon Flange Nut Size
Size	M 6 to M 16	Size	M6 to M12

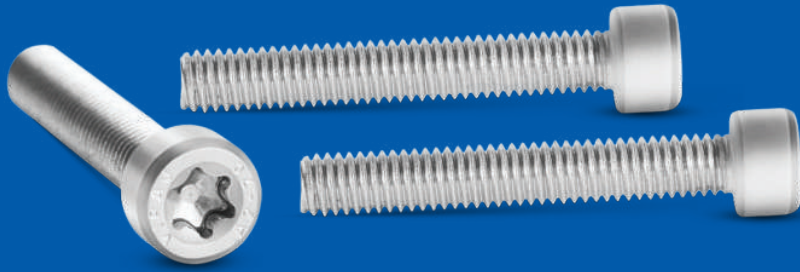

ISO14579-FT Hexalobular Socket Head Cap Screw			ISO14579-HT Hexalobular Socket Head Cap Screw		
Size.	Min.	Max.	Size.	Min.	Max.
M6	10	100	M6	35	150
M8	12	160	M8	40	160
M10	16	150	M10	45	150
M12	20	150	M12	55	150

HEXAGON SOCKET THIN HEAD CAP SCREW WITH BLIND HOLE


DIN 6912

Size	Length H/T
M6	25 - 100
M8	30 - 125
M10	30 - 150
M12	45 - 150


HEXAGON SOCKET THIN HEAD CAP SCREW

DIN 7984

Size	Length H/T
M6	30 - 100
M8	35 - 160
M10	40 - 150
M12	50 - 150

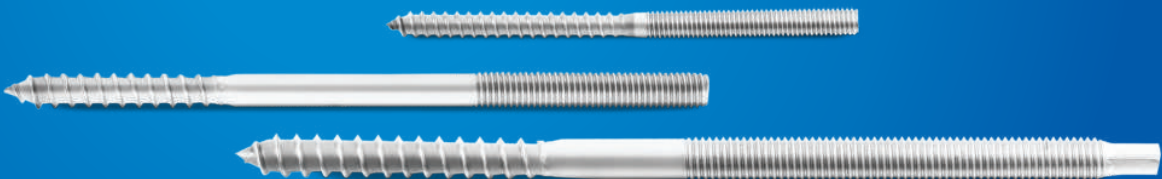

Dowel Screw Hexagon End		Dowel Screw Middle Hex		Dowel Screw Without Hex	
Size	Length	Size	Length	Size	Length
M10	160 - 250	M10	80 - 200	M6	50 - 160
M12	200 - 300	M12	100 - 250	M8	60 - 160

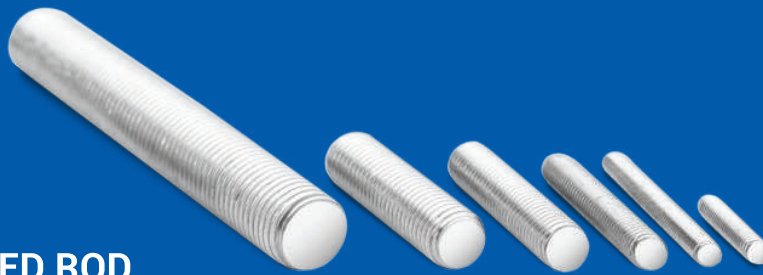

THREADED ROD

DIN 975/DIN 976

ANSI B 18.31.3/IFI 136/ASTM A 193 (CLASS-2)

	Size	Length	Size	Length
Long Length	M5	0.50 Mtr - 1.0 Mtr	1/4"	0.5 mtr - 3 mtr
	M6-M36	0.30 mtr - 3 mtr		3' - 12'
Short Length	M6	30 - 160	5/16" - 1 1/2"	0.5 mtr - 3 mtr
	M8	30 - 160		3' - 12'
	M10	40 - 250		
	M12	50 - 250		
	M14	50 - 250		
	M16	60 - 250		
	M18	60 - 250		
	M20	60 - 250		

DESCRIPTION

BS-1083 HEXAGON NUT
 ISO 7040 THICK NYLOCK NUT
 IFI-145 / 18.16.4 HEXAGON FLANGE NUT WITH SERRATION
 ASME B18.2.4.6M HEAVY HEXAGON NUT
 UNI 5587 1D HEXAGON NUT

SIZE

1/4" - 1"
 M10 - M12
 1/4" - 1/2"
 M12, M16, M20
 M10 - M20



**DIN934/ISO4032
/ISO 8673**

**DIN439/ISO4035
/ISO 8675**

ANSI B 18.2.2

Hexagon

Hexagon

Heavy

Hexagon

Hexagon Jam

Nuts

Thin Nuts

Hexagon Nuts

Nuts

Nuts

M5 - M27

M6 - M24

1/4" - 7/8"

1/4" - 1"

1/4" - 1"



DIN557

DIN562

DIN928

DIN929

Square Nuts

Square Thin Nuts

Square Weld Nuts

Hexagon Weld Nuts

M5 - M12

M6 - M8

M6 - M10

M5 - M12



**DIN982
Thick Nyloc Nuts**

M6 - M12

**DIN985
Thin Nyloc Nuts**

M6 - M12

**IFI 100 - 107
Thick Nyloc Nuts**

1/4" - 3/8"



**DIN6923
Hexagon Flange Nuts**

M6 - M12

Hexagon Flange Nuts with Serration

M6 - M12



DIN 125 Plain Washer

Size

M5-M24

Size

1/4" to 2"

DIN 127 Spring Lock Washer

Size

M5-M24

Size

1/4"-2"



External Serrated Lock Washers

Size

M5-M24

Size

1/4" to 2"

Internal Serrated Lock Washers

Size

M5-M24

Size

1/4" to 2"

ANSI B 18.6.3

Cross Recessed Pan Head Machine Screw		Cross Recessed Truss Head Machine Screw		Cross Recessed Flat CSK Head Machine Screw		Cross Recessed Raised CSK Oval Head Machine Screw	
Size	Length	Size	Length	Size	Length	Size	Length
1/4"	3/8" - 4"	1/4"	3/8" - 4"	1/4"	3/8" - 4"	1/4"	3/8" - 4"
5/16"	1/2" - 5"	-	-	5/16"	1/2" - 5"	-	-
3/8"	7/8" - 5"	-	-	-	-	-	-

Hexalobular Socket CSK Flat Head Screw			Hexalobular Raised CSK Head Screw		
ISO 14581			ISO 14584		
Size	Len (Min)	Len (Max)	Size	Len (Min)	Len (Max)
M3	10	40	M3	10	40
M4	10	40	M4	10	40
M5	10	50	M5	10	50
M6	12	100	M6	12	100
M8	12	100	M8	12	100
M10	16	100	M10	16	100

Hexalobular Pan Head Tapping Screw (Cross Recess)			Hexalobular CSK Tapping Screw (Cross Recess)		
ISO 14585			ISO 14586		
Size	Len (Min)	Len (Max)	Size	Len (Min)	Len (Max)
ST 2.9	9.5	38	ST 2.9	9.5	38
ST 3.5	9.5	38	ST 3.5	9.5	38
ST 4.2	9.5	50	ST 4.2	9.5	50
ST 4.8	9.5	60	ST 4.8	9.5	60
ST 5.5	13	60	ST 5.5	13	60
ST 6.3	13	60	ST 6.3	13	60

Hexalobular Raised CSK (Oval)		Head Tapping Screw ISO 14587	
Size	Length	Size	Length
ST 2.9	9.5 - 38	ST 4.8	9.5 - 60
ST 3.5	9.5 - 38	ST 5.5	13 - 60
ST 4.2	9.5 - 50	ST 6.3	13 - 60

Testing Facilities	Certifications	Certified from (TUV)	Certified from (BIS)
Tensile Test	EN-ISO 10204-3.1	ISO 9001-2015	IS 1364 - 1
Impact Test	-	CE	IS 1364 - 2
Hardness Test	EN-ISO 10204-3.2	ADW2 / PED	
IGC Test	-	ISO 14001 - 2015 ISO 45001 - 2018	